STONESOURCE











VANILLA Natural 12"x48" Rectified











WALL GINGER Strip Natural 8"x48"

FLOOR

GINGER Natural 12"x48" Rectified






WALL
HONEY Strip Natural 8"x48"

FLOOR
HONEY Natural 12"x72" Rectified



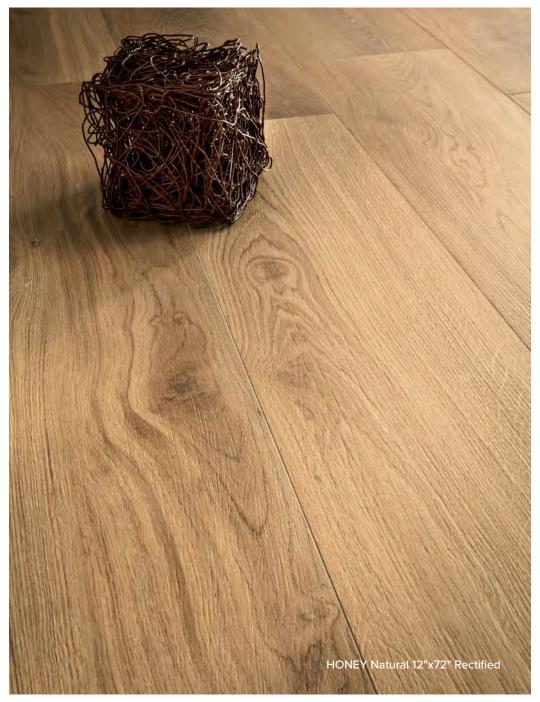




HONEY Natural 8"x48" Rectified







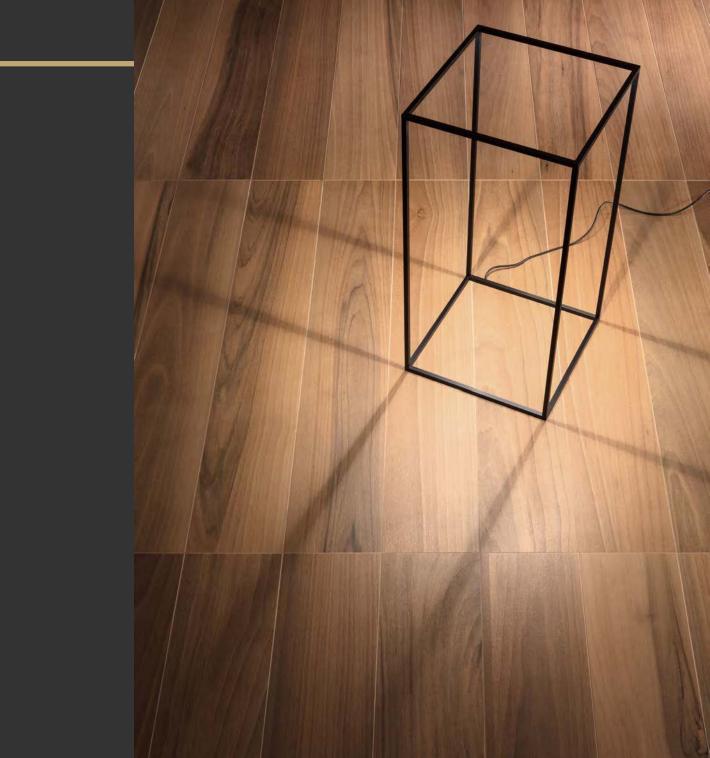

TOBACCO Natural 8"x48" Rectified





COLOR AVAILABILITY





UNGLAZED PORCELAIN STONEWARE Shade Variation V3

SIZE AVAILABILITY



12"x72" Rectified

Thickness: 10.5mm Finish: Natural Available in Vanilla, Ginger, and Honey

12"x48" Rectified

Thickness: 9.5mm Finish: Natural Available in all colors

8"x48" Rectified

Thickness: 9.5mm Finish: Natural Available in all colors,

DECORS

Strip 8"x48" Finish: Natural



Available in all colors


Chevron 17"x16"

Finish: Natural




Available in all colors


DECORS ABC 11"x11"* Finish: Natural

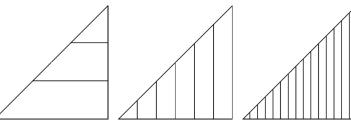



Available in all colors





^{*12} pcs per box, 4 pieces of each of the 3 visuals per box.

SPECIAL PIECES



Bullnose 2"x24" Rectified Thickness: 9.5mm - Finish: Natural Available in all colors



Step 14"x48" Rectified *Thickness: 12mm - Finish: Natural Available in all colors except*

Available in all colors



Corner Step DX 14"x48" Rectified Thickness: 12mm - Finish: Natural Available in all colors



Corner Step SX 14"x48" Rectified Thickness: 12mm - Finish: Natural

UNGLAZED PORCELAIN STONEWARE Shade Variation V3

2CM PAVERS - COLOR AVAILABILITY 2cm Pavers are not inclusive of the Pure Solutions antimicrobial technology.

HONEY






2CM PAVERS - SIZE AVAILABILITY 2cm Pavers are not inclusive of the Pure Solutions antimicrobial technology.

12"x48" Rectified

Thickness: 20mm Finish: Grip

Available in: **Honey** & **Cloves**.

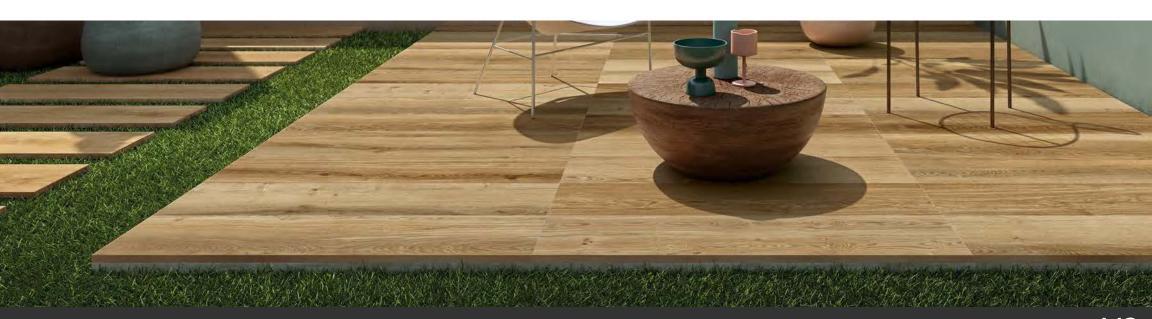

2CM PAVERS - SPECIAL PIECES 2cm Pavers Special Pieces are not inclusive of the Pure Solutions antimicrobial technology.



Grid 6"x24" Rectified Finish: Grip Available in: Honey & Cloves.



Angled Grid SX 6"x24" Rectified Available in: Honey & Cloves.



Angled Grid DX 6"x24" Rectified Finish: Grip Available in: Honey & Cloves.



Bull Trim 12"x24" Rectified Finish: Grip Available in: Honey & Cloves.



Bull Trim Angled SX 12"x24" Rectified Finish: Grip Available in: Honey & Cloves.



Bull Trim Angled DX 12"x24" Rectified Finish: Grip Available in: Honey & Cloves.




Straight Line Trim 12"x24" Rectified Finish: Grip



Straight Line Trim Angled SX 12"x24" Rectified Finish: Grip Available in: Honey & Cloves.



Straight Line Trim Angled DX 12"x24" Rectified



Available in: Honey & Cloves.



Bull Trim Step 12"x24" Rectified Finish: Grip

Available in: Honey & Cloves.



Straight Line Trim Step 12"x24" Rectified

Finish: Grip Available in: Honey & Cloves.



Straight Line Trim with Drip 12"x24" Rectified

Finish: Grip Available in: Honey & Cloves.



Bull Trim with Drip 12"x24" Rectified

Finish: Grip Available in: Honey & Cloves.





TECHNICAL CHARACTERISTICS FULL BODY PORCELAIN UGL According to: ISO 13006 G (Group Bla) / EN 14411 G (Group Bla) / ANSI A137.3 (Porcelain Tile, P1 Class) 9.5mm / 10.5mm / 20mm

TECHNICAL CHARACTERISTICS	TEST METHOD	REQUIRED VALUE	AVERAGE VALUES		
Water Absorption	ISO 10545-3	4.0.50	0.05%		
	ASTM C373	≤ 0.5%			
Bending Strength	ISO 10545-4	≥ 35N/mm²	In Accordance - 9.5mm/10.5mm 13600 N - 20mm		
	ASTM C648	≥ 250 lbf	In Accordance - 9.5mm/10.5mm 2800 lbf - 20mm		
Modulus of rupture	ISO 10545-4	≥ 35N/mm²	50N/mm ²		
Deep abrasion resistance	ISO 10545-6	≤ 175 mm³	145 mm ³		
	ASTM C1243	≤ 1/5 mm°			
Linear thermal expansion	ISO 10545-8	No provision	a ≤ 7x10 ⁻⁶ °C ⁻¹		
	ASTM C372	No provision	a ≤ 4.4x10 ⁻⁶ °F ⁻¹ / a ≤ 8x10 ⁻⁶ °C ⁻¹		
Stain resistance	ISO 10545-14	Class 3 Min.	5 Resistant		
	ASTM C1378	As indicated by manufacturer	A Resistant		
Chemical resistance	ISO 10545-13	As indicated by manufacturer	LA-HA Resistant		
	ASTM C650	As indicated by manufacturer	Class A Resistant		
Frost resistance	ISO 10545-12	No alteration	Resistant		
	ASTM C1026	As indicated by manufacturer	Resistant		
Fire reaction	EN 13823	CPR (UE) 305/2011, 2000/147/CE, UNI EN 13501-1	Classe/Class A1 (wall)		
	EN 9239-1		Classe/Class A1 _{fl} (floor)		
Flame spread	ASTM E84	-	Class A		
Thermal conductivity	EN 12524	-	λ = 1,3 W/m° K / 0.7 BTU/ft h° F		
Shade variation	ANSI A 137.3	As indicated by manufacturer	V3 Moderate variation		
			NATURAL	NATURAL TOBACCO	GRIP 2CM
Slip Resistance	DIN 51130	-	R10	R9	R11
	DIN 51097	-	-	-	A+B+C
	DCOF/ANSI A137.1	≥ 0.42 Wet	≥ 0.42 Wet	≥ 0.42 Wet	≥ 0.42 Wet

The color of the tiles printed in this catalog may differ from actual tiles. Tile color reproductions in this brochure are representative only. Slight tone and shade variations are inherent in porcelain tiles. Before selecting a color, we recommend that you contact a CTL representative before selecting.

UNGLAZED PORCELAIN STONEWARE Shade Variation V3



STONESOURCE