

FIRENZE
CONCRETE TEXTURES

STONESOURCE





FLOOR
EXTRA LIGHT Natural 48"x48" Rectified 6mm

MIDDLE WALL
MEDIUM Natural 48"x102" Rectified 6mm

RIGHT WALL
EXTRA LIGHT Natural 48"x102" Rectified 6mm




MEDIUM Natural 48"x102" Rectified **6mm**



WALL
EXTRA LIGHT Natural 48"x102" Rectified **6mm**
MEDIUM Natural 48"x102" Rectified **6mm**

FLOOR
EXTRA LIGHT Natural 48"x48" Rectified **6mm**

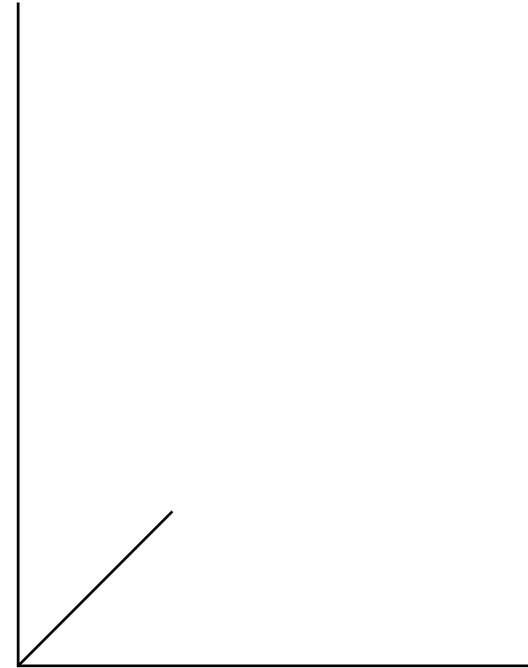

EXTRA LIGHT Natural 48"x48" Rectified 6mm



FLOOR
LIGHT Natural 48"x48" Rectified 6mm



MEDIUM Natural 48"x102" Rectified 6mm




LIGHT Natural 48"x48" Rectified 6mm





ZOOM Mix Natural 8"x8" Rectified

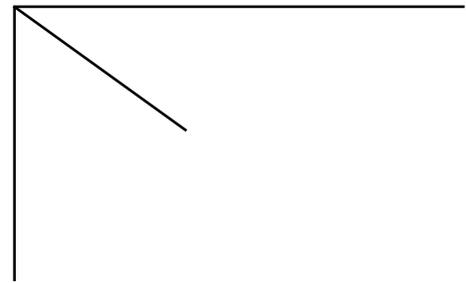

WALL
LIGHT Natural 24"x48" Rectified **6mm**
DARK Reef Natural 48"x102" Rectified **6mm**
FLOOR
DARK Natural 48"x48" Rectified **6mm**



LIGHT Natural 24"x48" Rectified **6mm**



DARK Reef Natural 48"x102" Rectified **6mm**

LIGHT Natural 24"x48" Rectified 6mm

pure backgrounds







LEFT WALL
MEDIUM Foam Natural 48"x102" Rectified 6mm

FLOOR
MEDIUM Natural 48"x102" Rectified 6mm

RIGHT WALL
DARK Dry Natural 48"x102" Rectified 6mm



FLOOR
MEDIUM Natural 48"x102" Rectified **6mm**



MEDIUM Foam Natural 48"x102" Rectified **6mm**



MEDIUM Natural 48"x102" Rectified 6mm



DARK Dry Natural 48"x102" Rectified 6mm



FLOOR
DARK Lappato 36"x36" Rectified


WALL
MEDIUM Mosaic Natural 12"x12"



Mosaic.

WALL
MEDIUM Mosaic Natural 12"x12"

FLOOR
DARK Lappato 36"x36" Rectified

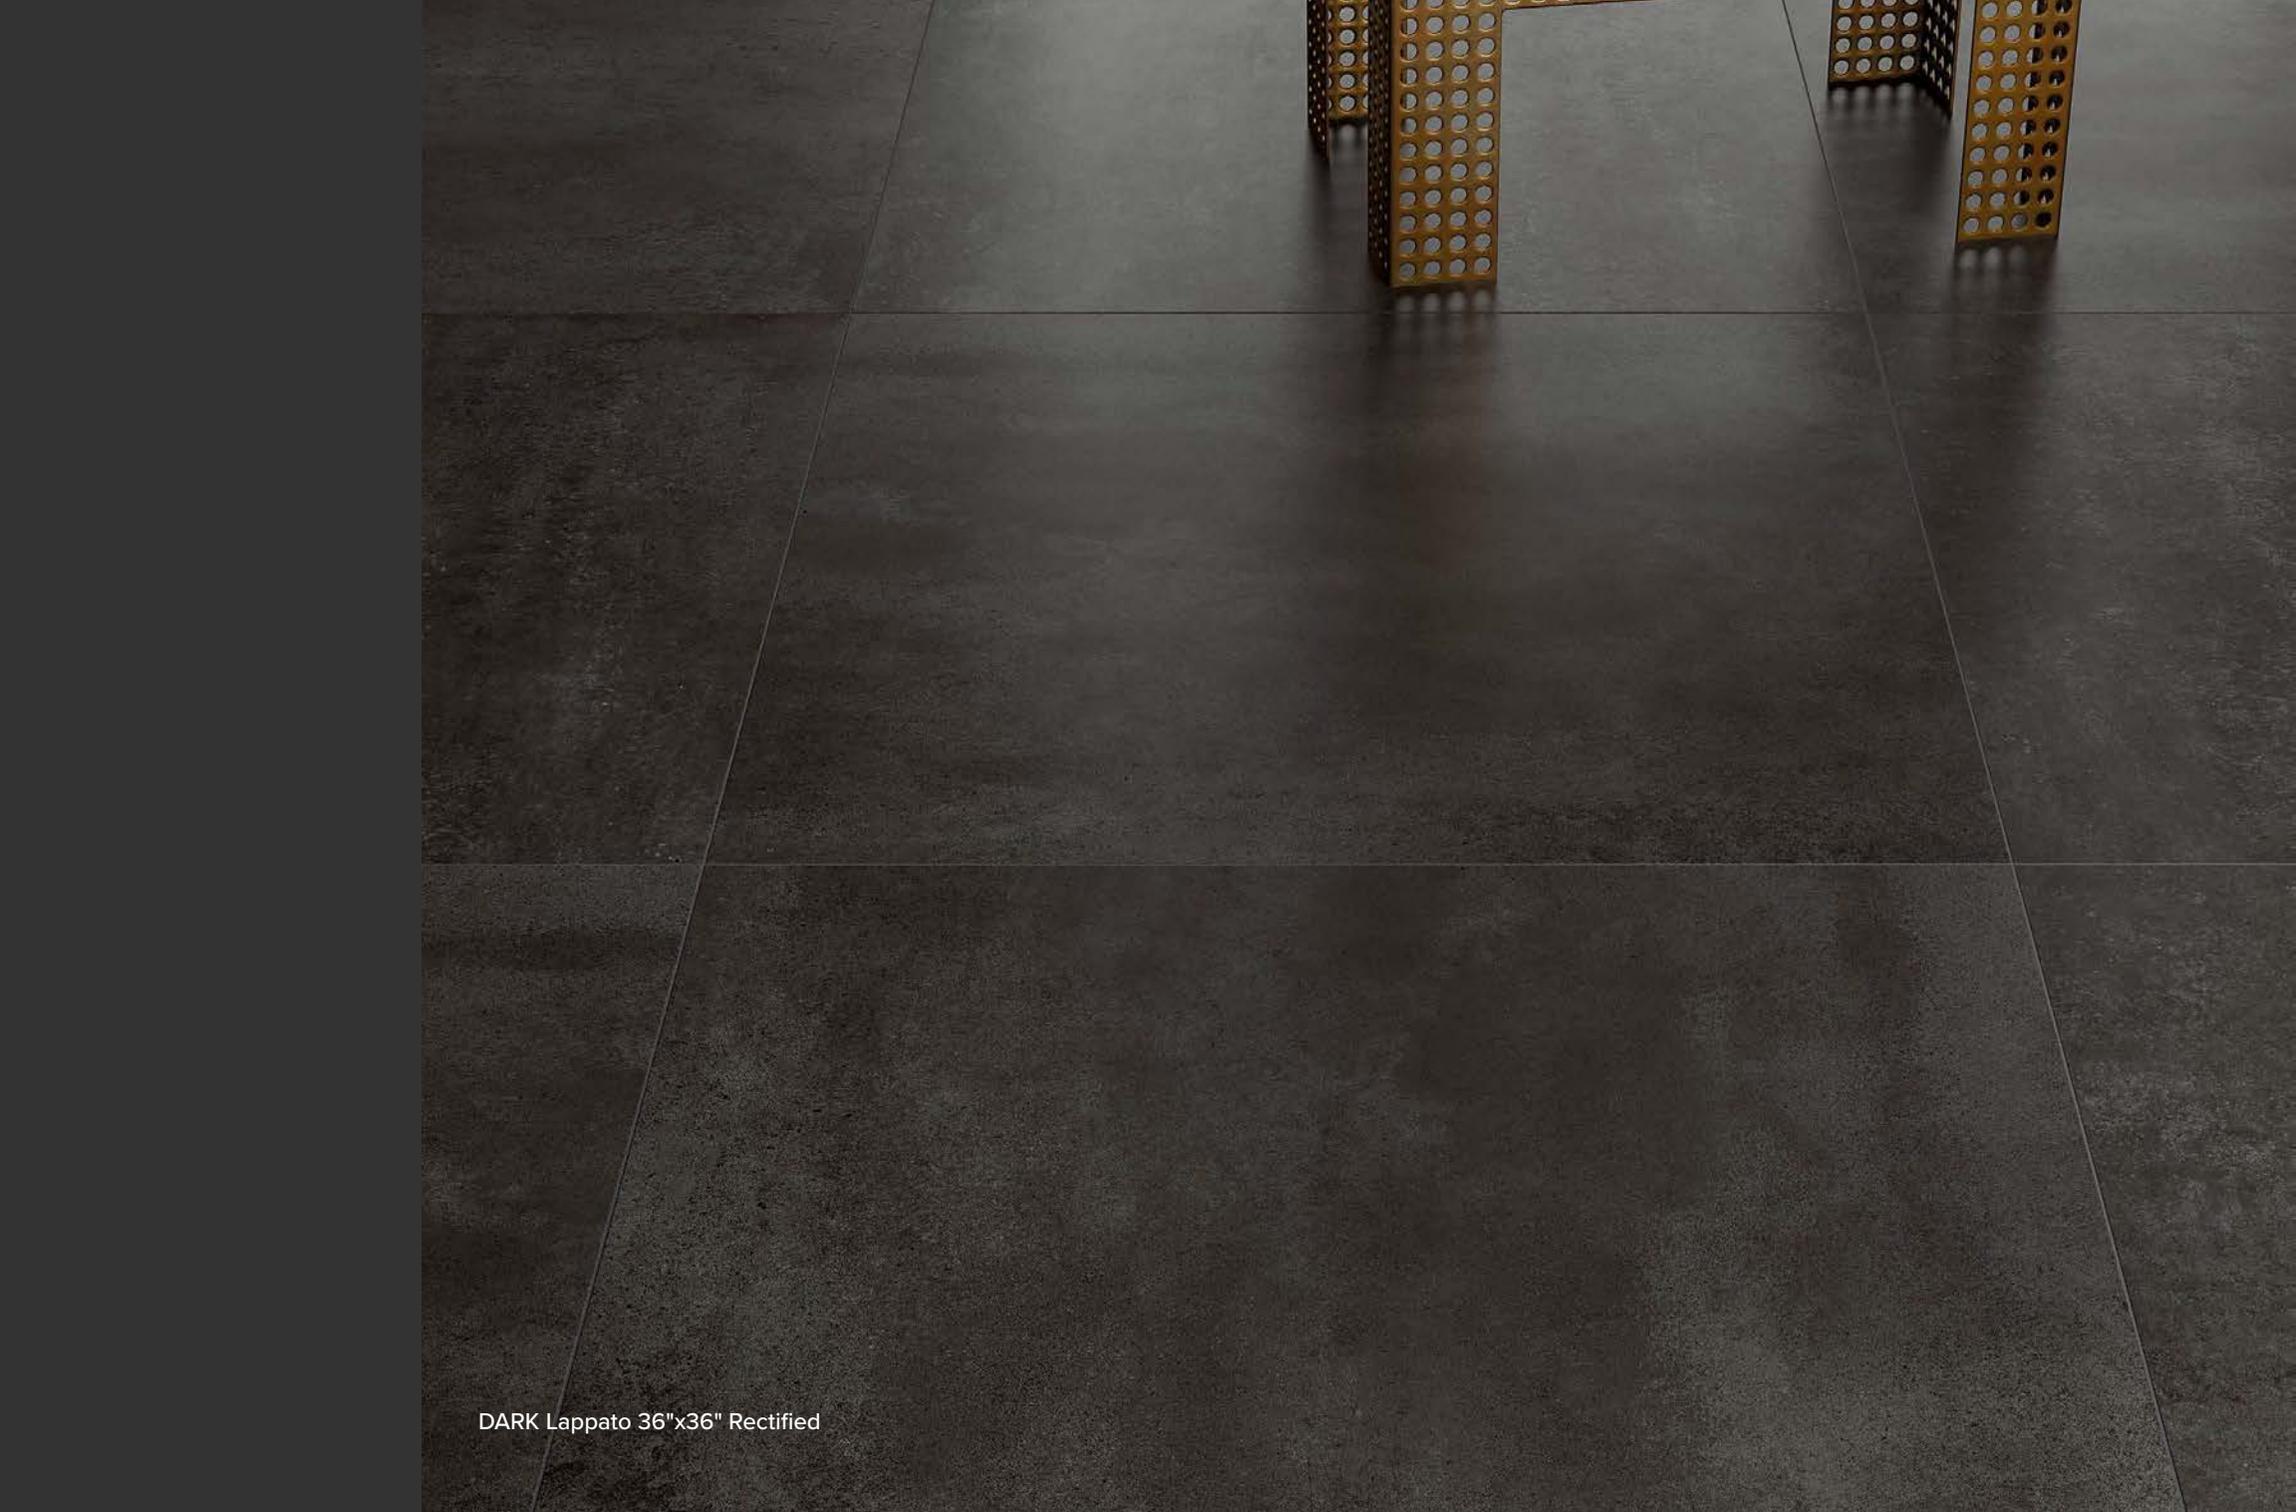

DARK Lappato 36"x36" Rectified




WALL

LIGHT Natural 48"x102" Rectified **6mm**

DARK LIGHT Natural 48"x102" Rectified **6mm**

FLOOR

GLOW Zoom Reef Natural 24"x24" Rectified

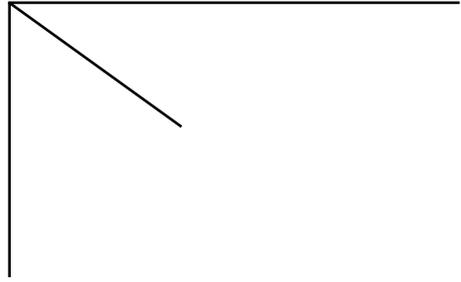

WALL
RUST Natural 48"x102" Rectified **6mm**
DARK Natural 48"x102" Rectified **6mm**

FLOOR
LIGHT Natural 36"x36" Rectified





LIGHT Natural 36"x36" Rectified



FLOOR
EXTRA LIGHT Natural 24"x24" Rectified

WALL
LIGHT Foam Natural 12"x24" Rectified

EXTRA LIGHT Dry Natural 24"x24" Rectified





FLOOR
EXTRA LIGHT Natural 18"x36" Rectified



FLOOR
MEDIUM Tide Natural 48"x102" Rectified 6mm

COUNTER
RUST

WALL
RUST Natural 48"x102" Rectified 6mm





FLOOR
MEDIUM Tide Natural 48"x102" Rectified 6mm



RUST Natural 48"x102" Rectified 6mm



FLOOR
GLOW Zoom Reef Natural 24"x24" Rectified

COUNTER
MEDIUM

WALL
MEDIUM Natural 48"x102" Rectified 6mm



GLOW Zoom Reef Natural 24"x24" Rectified



WALL

MEDIUM Natural 48"x102" Rectified *6mm*

FLOOR

GLOW Zoom Reef Natural 24"x24" Rectified

WALL
LIGHT Natural 48"x102" Rectified 6mm



SHADE Zoom Reef Natural 24"x24" Rectified



FLOOR
MEDIUM Grip 24"x24" Rectified

WALL
MEDIUM Tide Natural 48"x102" Rectified 6mm



WALL
MEDIUM Tide Natural 48"x102" Rectified **6mm**

FLOOR
MEDIUM Grip 24"x24" Rectified



FLOOR
SHADE Zoom Foam Natural 24"x24" Rectified



WALL
DARK Natural 48"x102" Rectified 6mm



FLOOR
GLOW Zoom Foam Natural 24"x24" Rectified

WALL
MEDIUM Natural 48"x102" Rectified 6mm



DARK Reef Natural 48"x102" Rectified 6mm



DARK Dry Natural 48"x102" Rectified 6mm






DARK Dry Natural 48"x102" Rectified **6mm**



MEDIUM Foam Natural 48"x102" Rectified 6mm

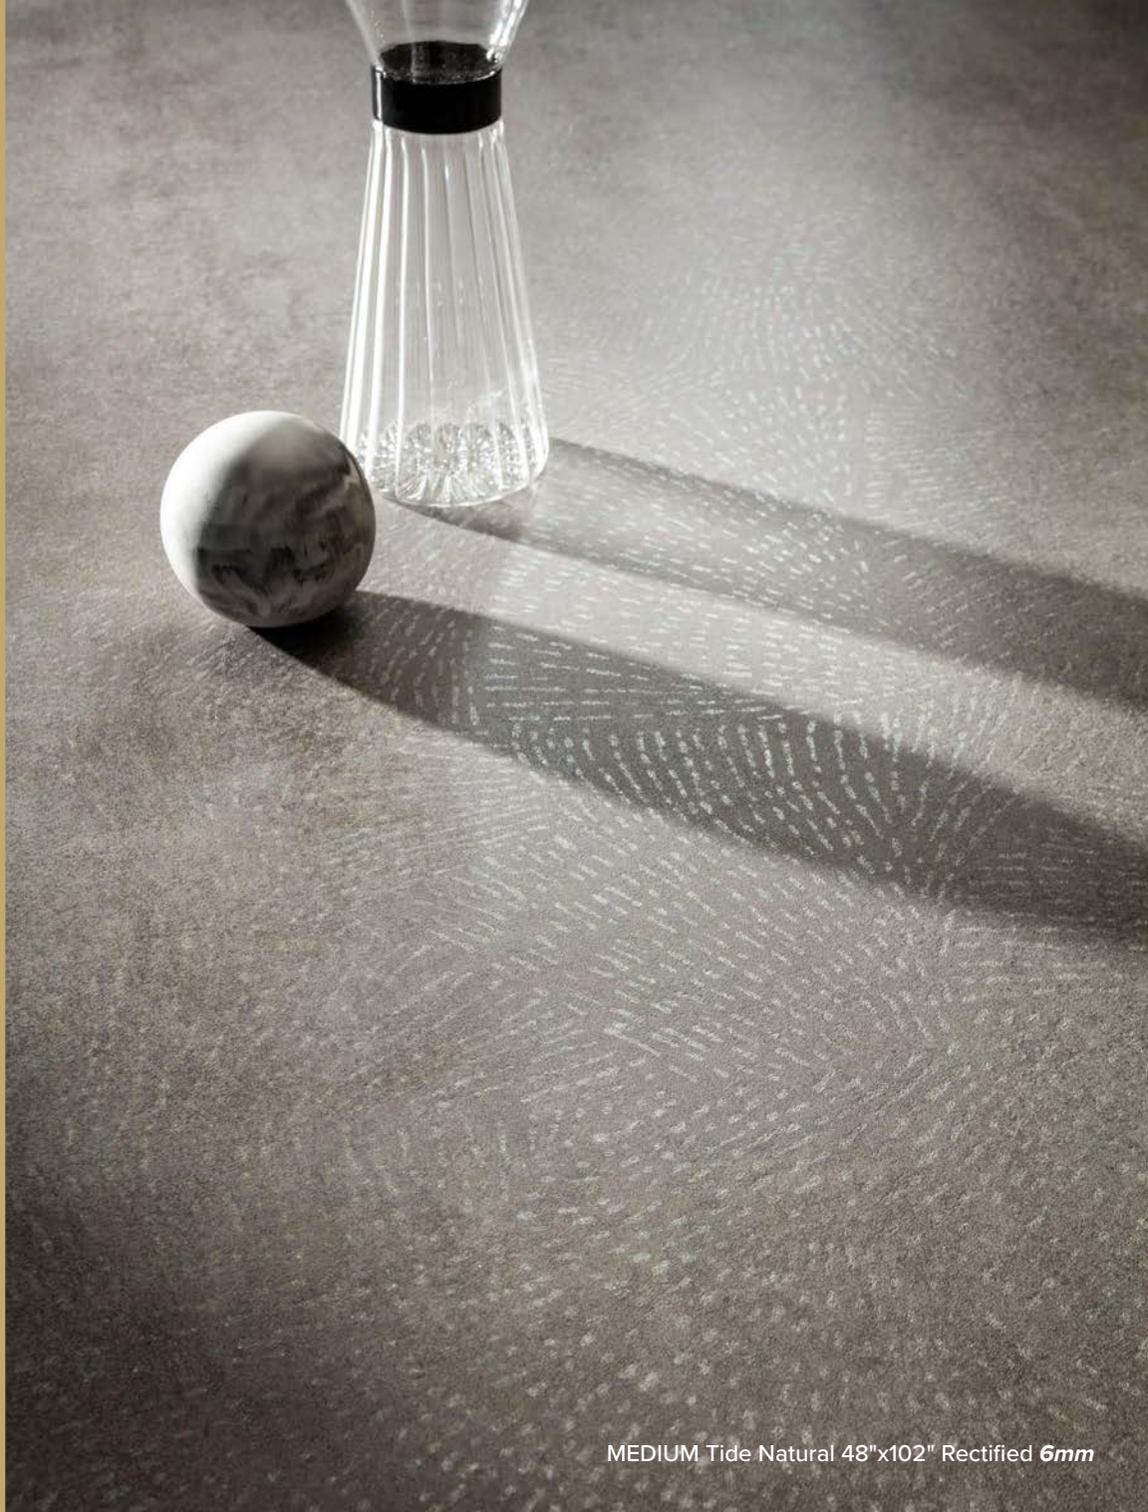

MEDIUM Tide Natural 48"x102" Rectified 6mm



PURE SOLUTIONS

ANTIMICROBIAL TILE

FIRENZE DIVISION

**EXTREMELY HIGH PERFORMANCE ANTIMICROBIAL FLOOR AND WALL TILES,
DESIGNED FOR HEALTHY, SAFE AND PROTECTED SPACES**

FIRENZE CONCRETE TEXTURES





FIELD TILES - COLOR AVAILABILITY

EXTRA LIGHT

LIGHT


MEDIUM

DARK

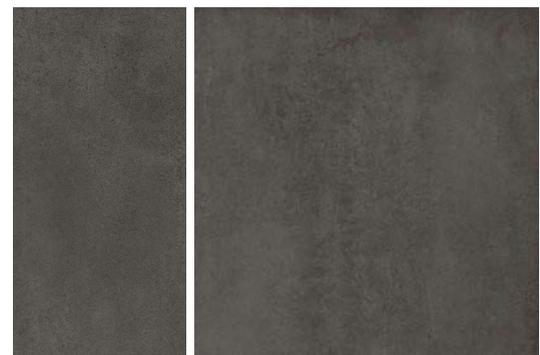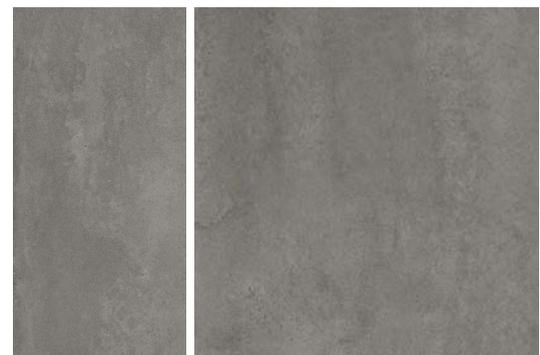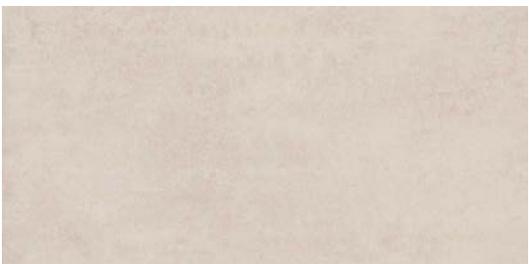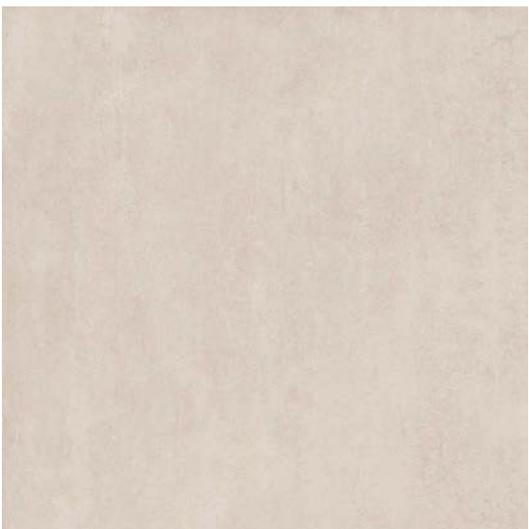

FIRENZE CONCRETE TEXTURES


FIELD TILES - SIZE AVAILABILITY

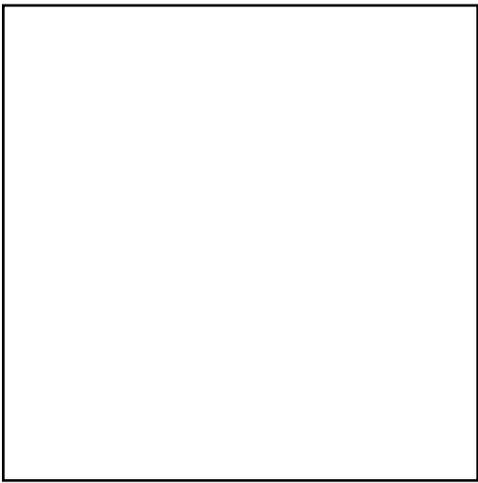

36"x36" Rectified
Thickness: 9.5mm
Finish: Natural/Lappato
Available in: **Extra Light, Light, Medium & Dark.**



18"x36" Rectified
Thickness: 9.5mm
Finish: Natural/Lappato
Available in: **Extra Light, Light, Medium & Dark.**




24"x24" Rectified
Thickness: 9.5mm
Finish: Natural/Lappato/Grip
Available in: **Extra Light, Light, Medium & Dark.**



12"x24" Rectified
Thickness: 9.5mm
Finish: Natural/Lappato
Available in: **Extra Light, Light, Medium & Dark.**

FIRENZE **CONCRETE TEXTURES**

2CM PAVERS - SIZE AVAILABILITY **2cm Pavers are not inclusive of the Pure Solutions antimicrobial technology.*

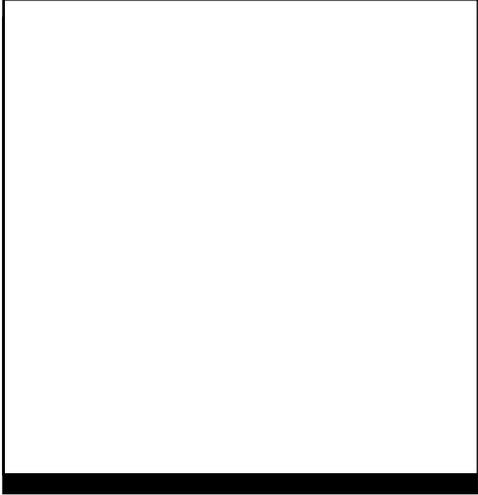

36"x36" Rectified*

Thickness: 20mm (2cm)

Finish: Grip

*Available in: **Extra Light, Light, Medium & Dark.***

**2cm Pavers are not inclusive of the Pure Solutions antimicrobial technology.*

FIRENZE CONCRETE TEXTURES

GRAPHIC VARIATIONS

Tide 24"x24" Rectified
Thickness: 9.5mm - Finish: Natural




MEDIUM

Foam 24"x24" Rectified
Thickness: 9.5mm - Finish: Natural



LIGHT

Reef 24"x24" Rectified
Thickness: 9.5mm - Finish: Natural

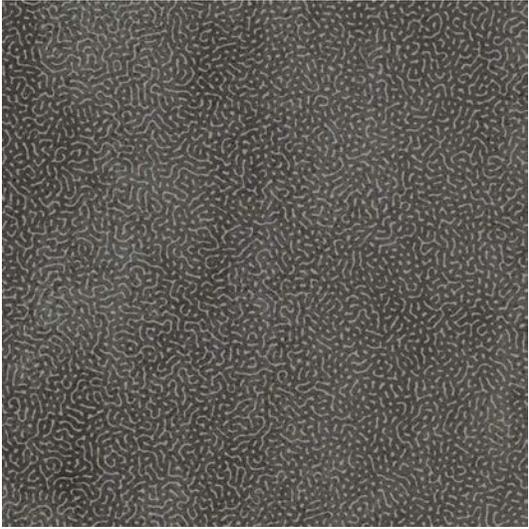


DARK

Dry 24"x24" Rectified
Thickness: 9.5mm - Finish: Natural



EXTRA LIGHT

Tide 12"x24" Rectified
Thickness: 9.5mm - Finish: Natural

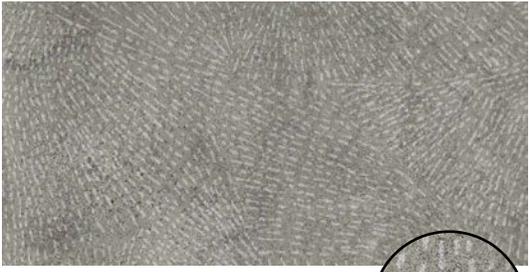

MEDIUM




Foam 12"x24" Rectified
Thickness: 9.5mm - Finish: Natural



LIGHT



Reef 12"x24" Rectified
Thickness: 9.5mm - Finish: Natural

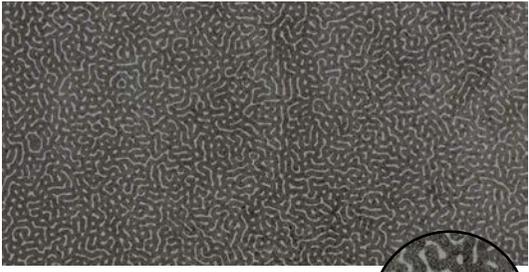

DARK



Dry 12"x24" Rectified
Thickness: 9.5mm - Finish: Natural



EXTRA LIGHT




FIRENZE CONCRETE TEXTURES

ZOOM - GRAPHIC VARIATIONS

Zoom Mix 8"x8" Rectified*


Thickness: 9.5mm - Finish: Natural

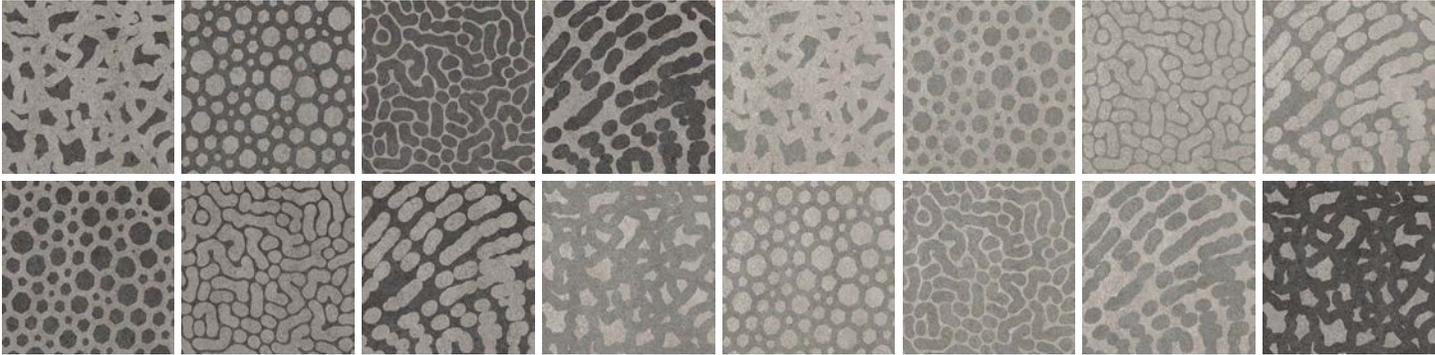


**Zoom Mix 8"x8" is composed of 16 different patterns designed to be mixed together. The display mix is not obligatory; a random installation is recommended.*

Zoom Foam 24"x24" Rectified

Thickness: 9.5mm - Finish: Natural

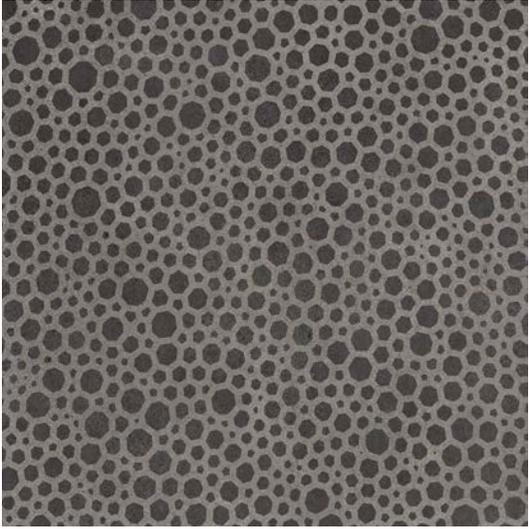


SHADE

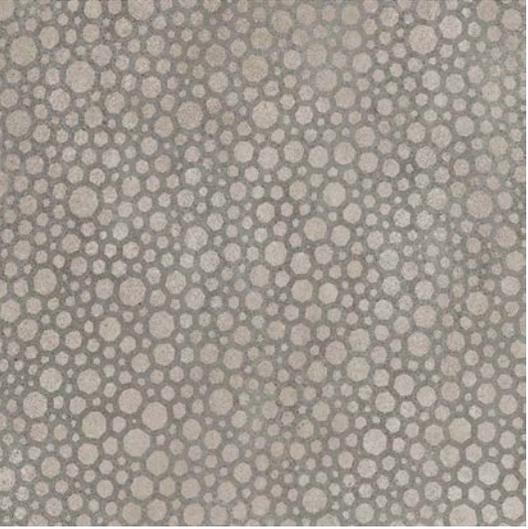


GLOW

Zoom Reef 24"x24" Rectified

Thickness: 9.5mm - Finish: Natural

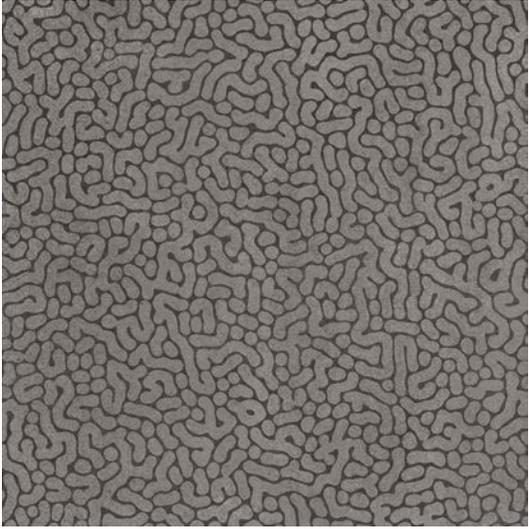

SHADE

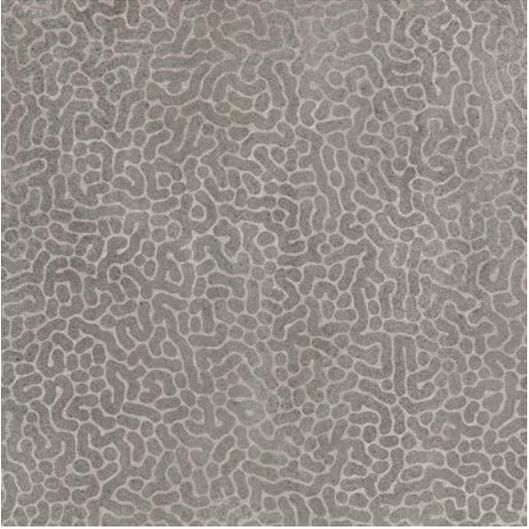

GLOW

FIRENZE CONCRETE TEXTURES

ZOOM - GRAPHIC VARIATIONS

Zoom Mix 24"x24" Rectified**

Thickness: 9.5mm - Finish: Natural



***Zoom Mix 24"x24" is composed of 16 different patterns designed to be mixed together. The display mix is not obligatory; a random installation is recommended. The packaging includes packages of 4 pcs with random patterns: we recommend that you purchase a small percentage of extra material to facilitate the composition of the patterns in the installation stage.*

FIRENZE CONCRETE TEXTURES

DECORS

Mosaic 12"x12"
Finish: Natural/Lappato



EXTRA LIGHT



LIGHT




MEDIUM



DARK

FIRENZE CONCRETE TEXTURES

SPECIAL PIECES



Bullnose 2"x24"


Finish: Natural/Lappato

*Available in: **Extra Light, Light, Medium & Dark.***



Step Trim 1.5"


*Available in: **Extra Light, Light, Medium & Dark.***

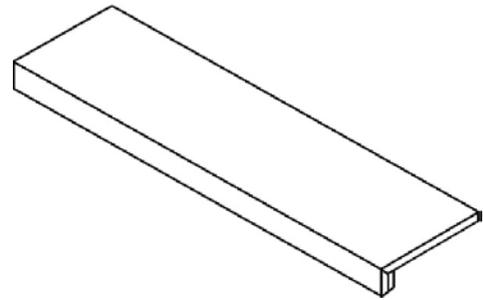

Step 13"x24"

Finish: Natural/Lappato/Grip

*Available in: **Extra Light, Light, Medium & Dark.***



Corner Step SX/DX 13"x13"


Finish: Natural/Lappato/Grip

*Available in: **Extra Light, Light, Medium & Dark.***

FIRENZE **CONCRETE TEXTURES**

THIN PORCELAIN SLABS - COLOR AVAILABILITY

EXTRA LIGHT

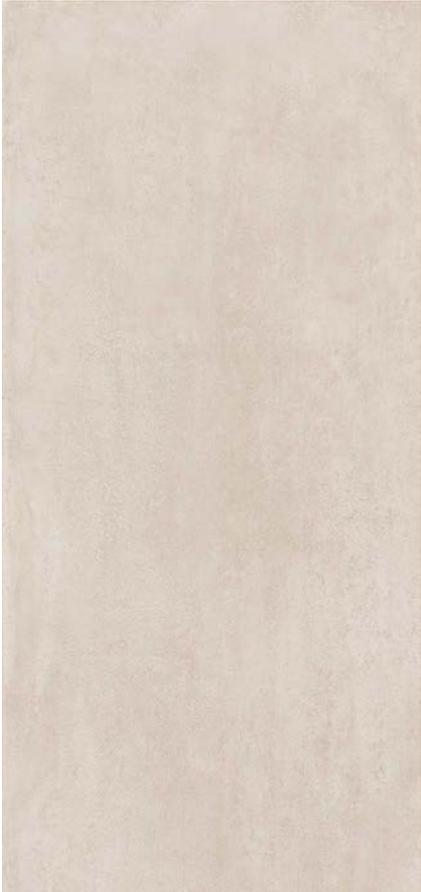

LIGHT



MEDIUM



DARK




RUST



THIN PORCELAIN SLABS - SIZE AVAILABILITY



48"x102" Rectified
Thickness: 6mm
Finish: Natural
Available in: **Extra Light, Light, Medium, Dark & Rust.**

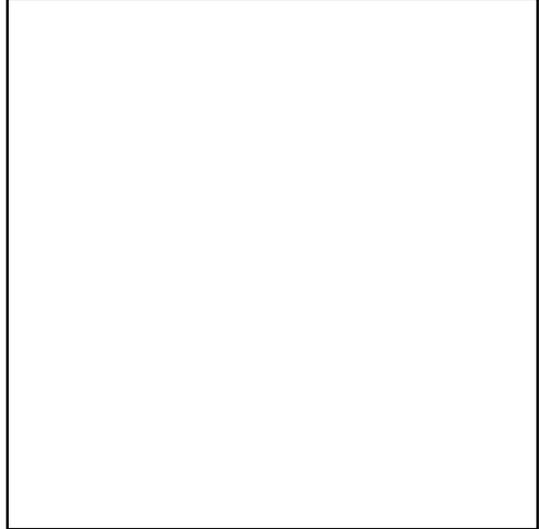

48"x48" Rectified
Thickness: 6mm
Finish: Natural
Available in: **Extra Light, Light, Medium, Dark & Rust.**




24"x48" Rectified
Thickness: 6mm
Finish: Natural
Available in: **Extra Light, Light, Medium, Dark & Rust.**

FIRENZE CONCRETE TEXTURES

THIN PORCELAIN SLABS - GRAPHIC VARIATIONS

Tide 48"x102" Rectified
Thickness: 6mm - Finish: Natural

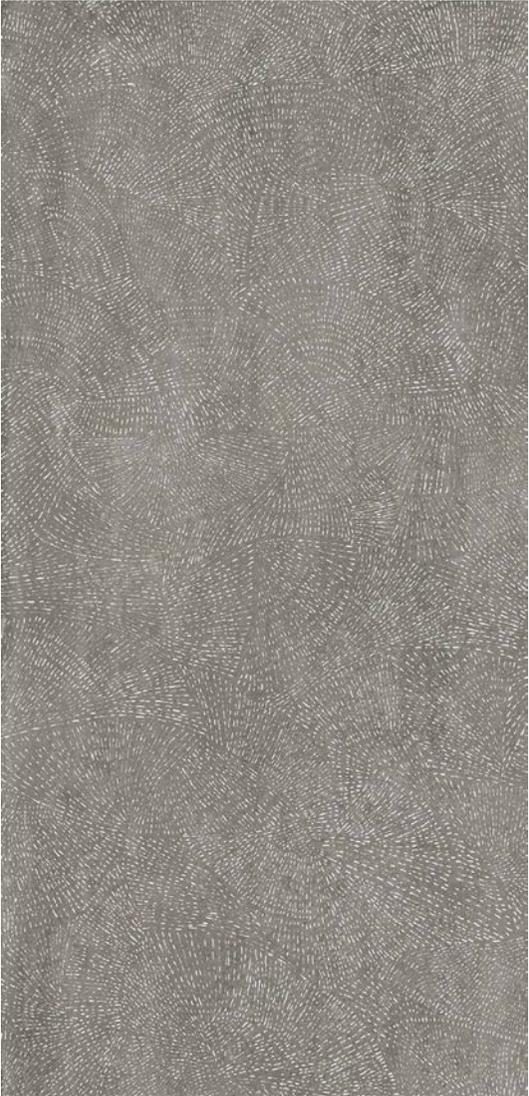


MEDIUM

Foam 48"x102" Rectified
Thickness: 6mm - Finish: Natural




MEDIUM

Reef 48"x102" Rectified
Thickness: 6mm - Finish: Natural

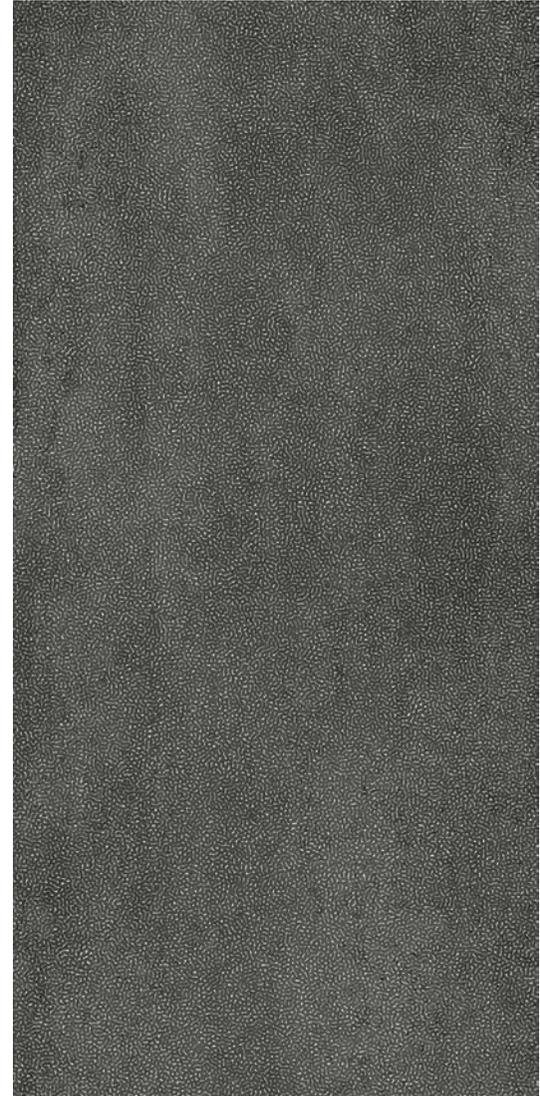

DARK

Dry 48"x102" Rectified
Thickness: 6mm - Finish: Natural

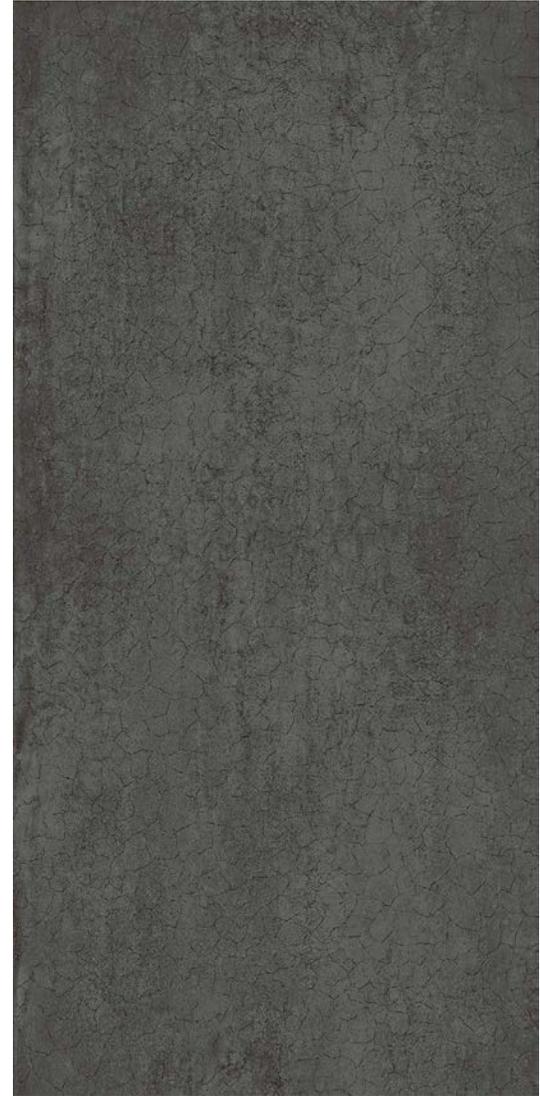


DARK

FIRENZE CONCRETE TEXTURES

THIN PORCELAIN SLABS - GRAPHIC VARIATIONS

Tide 48"x48" Rectified
Thickness: 6mm - Finish: Natural

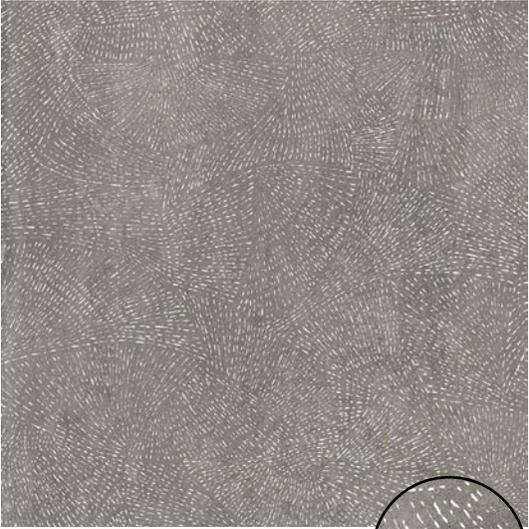


MEDIUM




Foam 48"x48" Rectified
Thickness: 6mm - Finish: Natural




MEDIUM



Reef 48"x48" Rectified
Thickness: 6mm - Finish: Natural

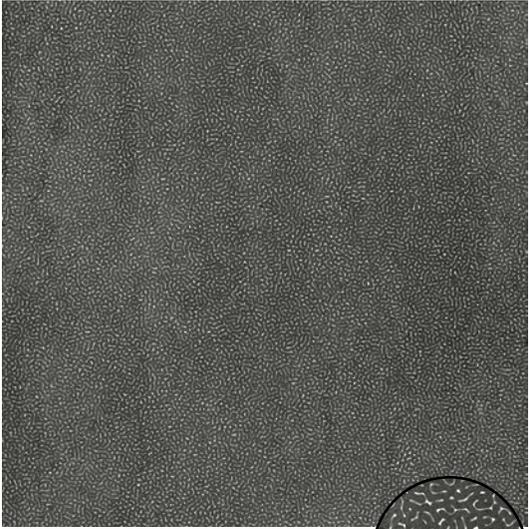


DARK



Dry 48"x48" Rectified
Thickness: 6mm - Finish: Natural



DARK



FIRENZE CONCRETE TEXTURES

TECHNICAL CHARACTERISTICS FULL BODY PORCELAIN UGL According to: ISO 13006 G (Group Bla) / EN 14411 G (Group Bla) / ANSI A137.3 (Porcelain Tile, P1 Class) 9.5mm / 20mm

TECHNICAL CHARACTERISTICS	TEST METHOD	REQUIRED VALUE	AVERAGE VALUES 9.5MM/20MM			
			NATURAL	LAPPATO	GRIP	GRIP 2CM
Water Absorption	ISO 10545-3	≤ 0.5%	0.05%			
	ASTM C373					
Bending Strength	ISO 10545-4	≥ 35N/mm ²	In Accordance - 9.5mm 13600 N - 20mm			
	ASTM C648	≥ 250 lbf	In Accordance - 9.5mm 2800 lbf - 20mm			
Modulus of rupture	ISO 10545-4	≥ 35N/mm ²	50N/mm ²			
Deep abrasion resistance	ISO 10545-6	≤ 175 mm ³	145 mm ³			
	ASTM C1243					
Linear thermal expansion	ISO 10545-8	No provision	a ≤ 7x10 ⁻⁶ °C ⁻¹			
	ASTM C372	No provision	a ≤ 4.4x10 ⁻⁶ °F ⁻¹ / a ≤ 8x10 ⁻⁶ °C ⁻¹			
Stain resistance	ISO 10545-14	Class 3 Min.	5 Resistant			
	ASTM C1378	As indicated by manufacturer	A Resistant			
Chemical resistance	ISO 10545-13	As indicated by manufacturer	LA-HA Resistant			
	ASTM C650	As indicated by manufacturer	A Resistant			
Frost resistance	ISO 10545-12	No alteration	Resistant			
	ASTM C1026	As indicated by manufacturer	Resistant			
Fire reaction	EN 13823	CPR (UE) 305/2011, 2000/147/CE, UNI EN 13501-1	Classe/Class A1 (wall)			
	EN 9239-1		Classe/Class A1 _{fl} (floor)			
Flame spread	ASTM E84	-	Class A			
Thermal conductivity	EN 12524	-	λ = 1,3 W/m° K / 0.7 BTU/ft h° F			
Shade variation	ANSI A 137.3	As indicated by manufacturer	V3 Moderate variation			
			NATURAL	LAPPATO	GRIP	GRIP 2CM
Slip Resistance	DIN 51130	-	R10	-	R11	R11
	DIN 51097	-	A+B	-	A+B+C	A+B+C
	DCOF/ANSI A326.3	≥ 0.42 Wet	≥ 0.42 Wet	-	≥ 0.42 Wet	≥ 0.42 Wet

The color of the tiles printed in this catalog may differ from actual tiles. Tile color reproductions in this brochure are representative only. Slight tone and shade variations are inherent in porcelain tiles. Before selecting a color, we recommend that you contact a CTL representative before selecting.

FIRENZE CONCRETE TEXTURES

TECHNICAL CHARACTERISTICS LAMINATED PORCELAIN STONEWARE UGL According to: ISO 13006 G (Group Bla) / EN 14411 G (Group Bla) / ANSI A137.3 6MM

TECHNICAL CHARACTERISTICS	TEST METHOD	REQUIRED VALUE	AVERAGE VALUES - THIN PORCELAIN SLABS 6MM
Water Absorption	ISO 10545-3	≤ 0.5%	0.1%
	ASTM C373		
Modulus of rupture	ISO 10545-4	≥ 35N/mm ²	50 N/mm ²
	ASTM C1505	≥ 6000 PSI	≥ 6000 PSI
Deep abrasion resistance	ISO 10545-6	≤ 175 mm ³	Conforms
	ASTM C1243		
Linear thermal expansion	ISO 10545-8	No provision	$a \leq 7 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
	ASTM C372	No provision	$a \leq 4.4 \times 10^{-6} \text{ }^{\circ}\text{F}^{-1} / a \leq 8 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
Stain resistance	ISO 10545-14	Class 3 Min.	5 Resistant
	ASTM C1378	As indicated by manufacturer	Class A Resistant
Chemical resistance	ISO 10545-13	As indicated by manufacturer	LA-HA Resistant
	ASTM C650	As indicated by manufacturer	Class A Resistant
Frost resistance	ISO 10545-12	No alteration	Resistant
	ASTM C1026	As indicated by manufacturer	Resistant
Fire reaction	EN 13823	CPR (UE) 305/2011, 2000/147/CE, UNI EN 13501-1	Classe/Class A1 (wall)
	EN 9239-1		Classe/Class A1 _{fl} (floor)
Flame spread	ASTM E84	-	Class A
Shade variation	ANSI A 137.3	As indicated by manufacturer	V3 Moderate variation
			NATURAL 6MM
Slip Resistance	DIN 51130	-	R10
	DCOF/ANSI A326.3	≥ 0.42 Wet	≥ 0.42 Wet

The color of the tiles printed in this catalog may differ from actual tiles. Tile color reproductions in this brochure are representative only. Slight tone and shade variations are inherent in porcelain tiles. Before selecting a color, we recommend that you contact a CTL representative before selecting.



STONESOURCE