

FIORANO USA
CITY LIGHTS

STONESOURCE







2021

A night scene in a city, likely New York City, featuring a street art display in the foreground and a brightly lit skyscraper in the background. The display consists of several framed artworks, including a colorful comic book illustration of superheroes and a black and white photograph of a group of people. People are seen looking at the art, and the scene is illuminated by streetlights and the building's lights.

A MODERN STYLE THAT LEAVES LASTING IMPRESSIONS

FIORANO USA CITY LIGHTS

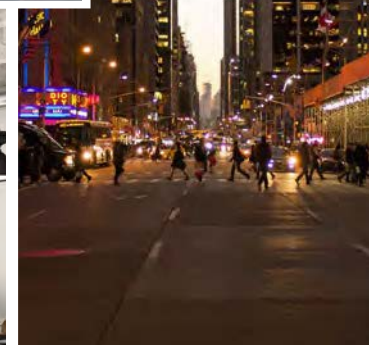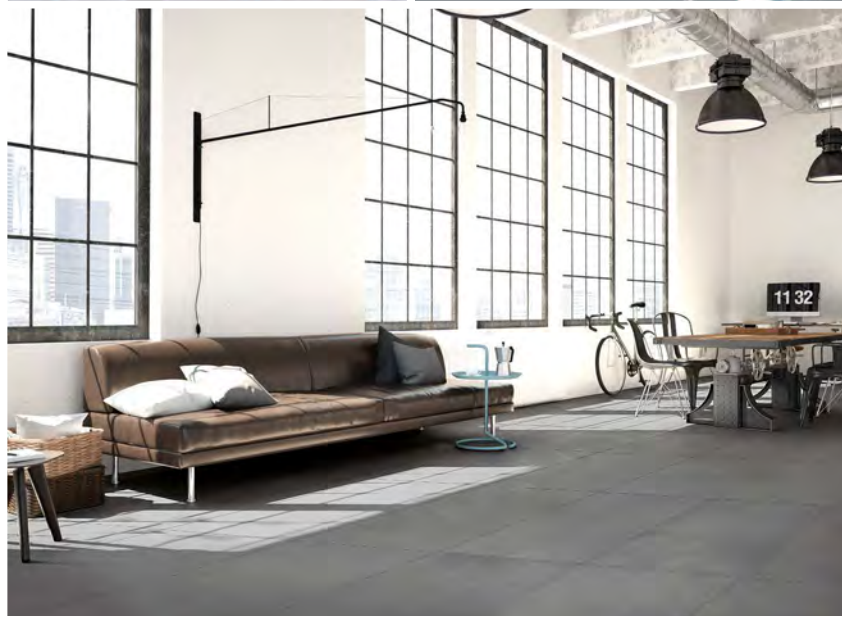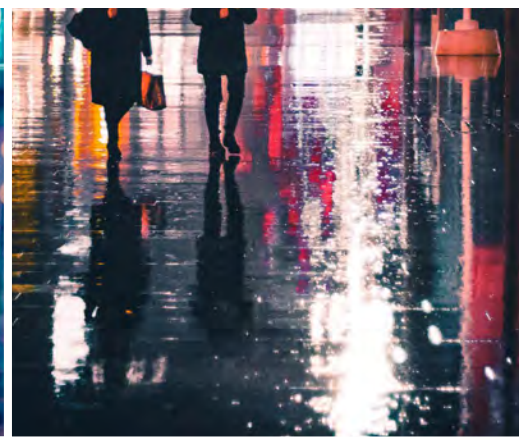

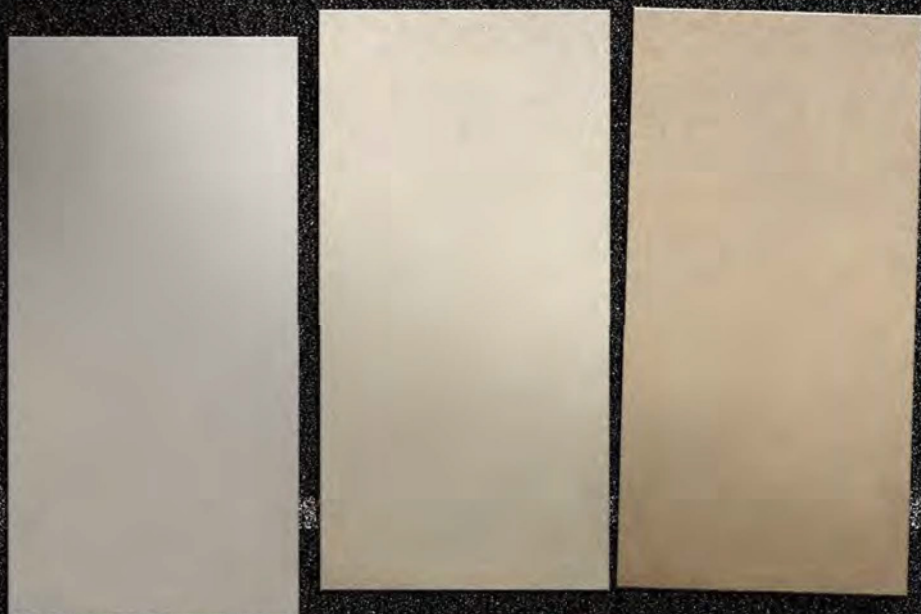

FIELD TILES

WALL TILES



WALL TILES



FIELD TILES



FIELD TILES
TEXTURES

RAW

MATTE

CHISELED



FIORANO USA
CITY LIGHTS

RAW TEXTURES WITH GENTLE COLORS



TITANIUM Matte 24"x48" Rectified



METROPOLIS Matte 24"x24" Rectified





WALL
SYMPHONY BLUE + AQUA Glossy 3"x12"

FLOOR
COASTAL Matte 12"x12" Rectified

STHGHIT CITY

COASTAL Matte 12"x12" + 12"x24" Rectified





WALL
AMBITION + DEW Glossy 3"x12"

FLOOR
JASPER Matte 24"x48" Rectified



WALL
WISDOM GREY Glossy 3"x12"

FLOOR
TITANIUM Matte 12"x24" Rectified





BALANCE Glossy 3"x12"



WALL
ESSENTIAL GREY Glossy 3"x12"
COASTAL Chiseled 12"x24" Rectified

FLOOR
MIST GREY Raw 12"x12" Rectified



DUST BLUE Raw 12"x12" + 12"x24" + 24"x24" Rectified



WALL
JET BLACK Glossy 3"x12"

FLOOR
PEARL Matte 24"x24" Rectified



WALL
JET BLACK Glossy 3"x12"

FLOOR
PEARL Matte 24"x24" Rectified



WALL
PURE Glossy 3"x12"

FLOOR
PEARL Matte 12"x12" Rectified



PEARL Matte 12"x24" + 24"x24" Rectified





TAN Chiseled 12"x24" Rectified
CASHMERE Glossy 3"x12"



WALL
CASHMERE + STUDIO BEIGE Glossy 6"x24"

FLOOR
SAND Matte 12"x24" Rectified

STHGT XHS




WALL
AQUA + SYMPHONY Glossy 6"x24"

FLOOR
SAND Raw 24"x24" Rectified

FIORANO USA **CITY LIGHTS**
FIELD TILES

COLOR AVAILABILITY

METROPOLIS

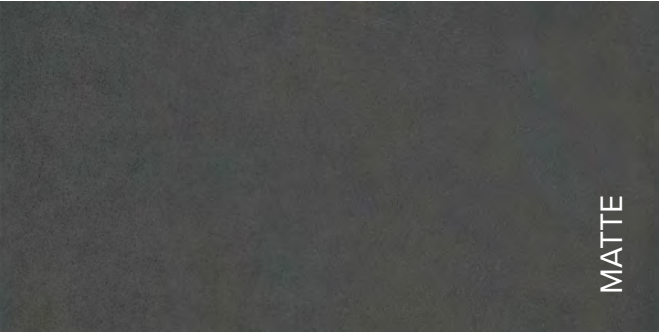

COASTAL



DUST BLUE



FIORANO USA **CITY LIGHTS**
FIELD TILES

COLOR AVAILABILITY


TITANIUM



MIST GREY



JASPER

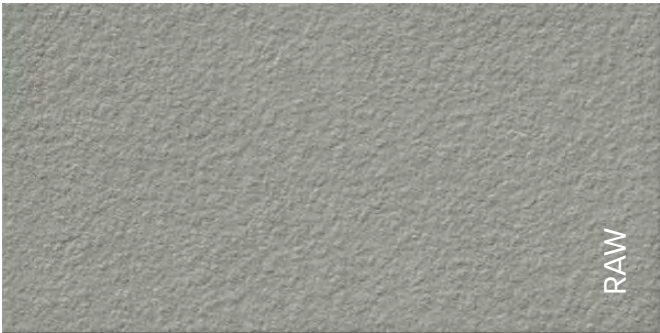


FIORANO USA **CITY LIGHTS**
FIELD TILES

COLOR AVAILABILITY

SAND



TAN

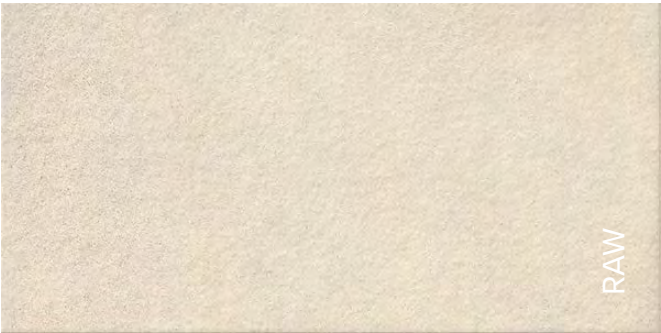


PEARL



FIORANO USA CITY LIGHTS


FIELD TILES

SIZE AVAILABILITY




24”x48” Rectified

Thickness: 10mm
Finish: Matte/Raw/Chiseled
Available in all colors.




24”x24” Rectified

Thickness: 10mm
Finish: Matte/Raw
Available in all colors.



12”x24” Rectified


Thickness: 10mm
Finish: Matte/Raw/Chiseled
Available in all colors.



12”x12” Rectified


Thickness: 10mm
Finish: Matte/Raw
Available in all colors.

SPECIAL PIECES



Bullnose 3”x12” Rectified

Thickness: 10mm
Finish: Matte
Available in all colors.



Cove Base 6”x12” Pressed

Thickness: 7mm
Finish: Matte
Available in all colors.

FIORANO USA CITY LIGHTS


FIELD TILES

DECORS

Mosaic 12"x12" Sheet (2"x2" pcs)
Thickness: 10mm - Finish: Matte/Raw




METROPOLIS



COASTAL



DUST BLUE




TITANIUM




MIST GREY



JASPER



SAND




TAN




PEARL

FIORANO USA **CITY LIGHTS**
WALL TILE

COLOR AVAILABILITY

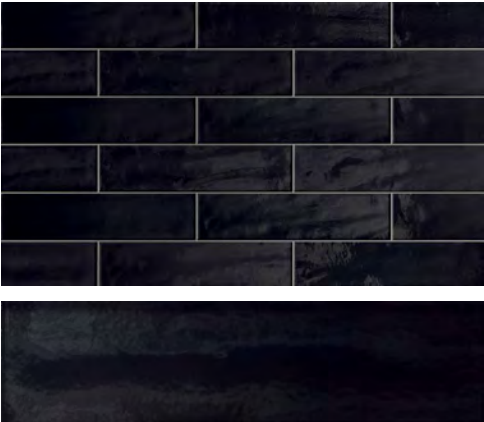


JET BLACK

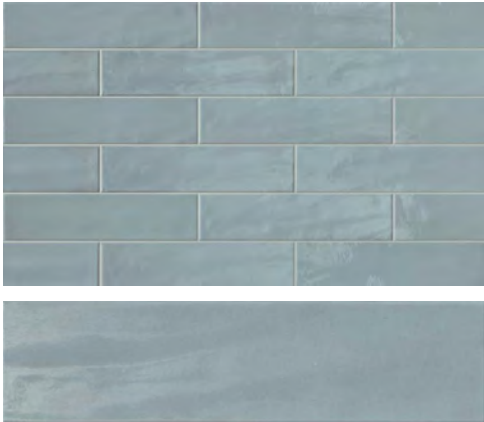

SYMPHONY BLUE



NIMBUS

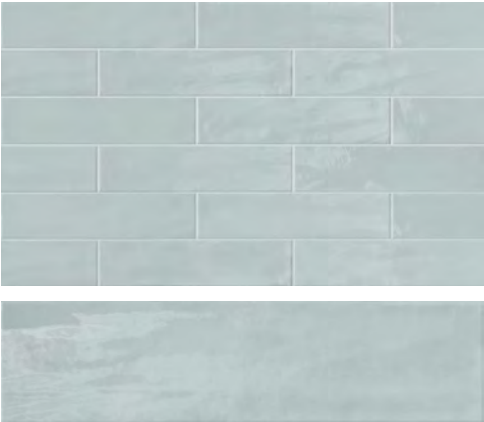


AQUA



WISDOM GREY



ESSENTIAL GREY

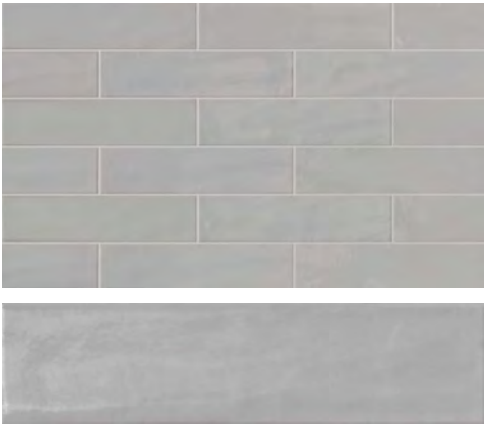

BALANCE



AMBITION


FIORANO USA CITY LIGHTS

WALL TILE


COLOR AVAILABILITY



DEW

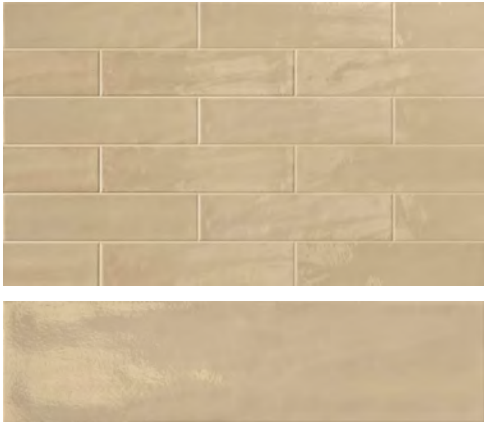

STUDIO BEIGE

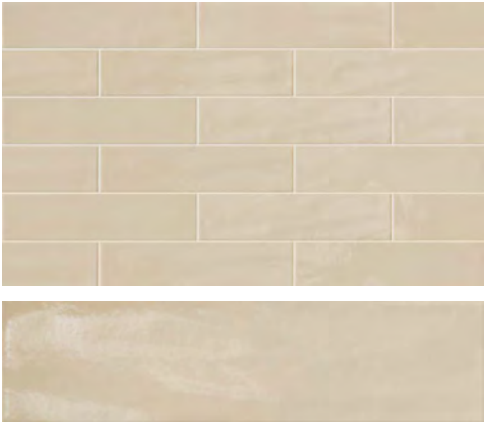

CASHMERE



PURE

SIZE AVAILABILITY




6"x24" Pressed
Thickness: 8mm
Finish: Glossy
Available in all colors.



3"x12" Pressed
Thickness: 8mm
Finish: Glossy
Available in all colors.

SPECIAL PIECES



Bullnose 6"x24"
Thickness: 8mm
Finish: Glossy
Available in all colors.

FIORANO USA CITY LIGHTS

FIELD TILE

TECHNICAL SPECIFICATIONS

ANSI A137 STANDARDS PORCELIN TILES WITH LOW WATER ABSORPTION CLASS P1

TECHNICAL FEATURE	STANDARD METHOD	REQUIREMENTS	FIELD TILE - VALUES
Caliber Range - Calibrated	ASTM C499	±0.50% or 0.08 in (2.0mm) [1]	±0.20%
Caliber Range - Rectified	ASTM C499	±0.25% or 0.03 in (0.8mm) [1]	±0.20%
Thickness [2]	ASTM C499	Range: ±0.04in (1.02mm)	COMPLIES
Wedging - Calibrated	ASTM C502	±0.50% or 0.08 in (2.0mm) [1]	±0.30%
Wedging - Rectified	ASTM C502	±0.25% or 0.03 in (0.8mm) [1]	±0.15%
Warpage Edge - Calibrated	ASTM C485	±0.75% or 0.09 in (2.3mm) [1]	±0.30%
Warpage Edge - Rectified	ASTM C485	±0.40% or 0.05 in (1.3mm) [3] or 1.8mm [4]	±0.25%
Breaking Strength	ASTM C648	Average ≥250 Lbf (1.11kN)/ Individual ≥225 Lbf (1.00kN)	COMPLIES
Water absorption	ASTM C373	≤0.50%	COMPLIES
Thermal Shock [5]	ASTM C484	PASS	PASS
Resistance to freeze/Thaw cycling [6]	ASTM C1026	AS REPORTED	NO DAMAGE
Visible Abrasion Resistance [5]	ASTM C1027-99	AS REPORTED	IV
Chemical Resistance	ASTM C650	AS REPORTED	NOT AFFECTED
Stain Resistance	ASTM C1378	AS REPORTED	NOT AFFECTED
D.C.O.F.	ANSI A 137.1-2012 (Section 9.6)	≥ 0.42 Wet [7]	Matte: 0.52 Wet Chiseled: 0.53 Wet Raw: 0.65 Wet

[1] Whichever is less.
[2] May not apply to textured surfaces or tiles with uneven back patterns.
[3] Whichever is less, for tiles up to 24”x 24” (610mm x 610mm)
[4] Applies to tiles Larger than 24”x 24” (610mm x 610mm)
[5] Glazed tiles only.
[6] When installation subject to freeze/thaw conditions
[7] For Level interior spaces expected to be walked upon when wet.

FIORANO USA CITY LIGHTS

WALL TILE

TECHNICAL SPECIFICATIONS

ANSI A137 STANDARDS PORCELAIN TILES WITH LOW WATER ABSORPTION CLASS P1

TECHNICAL FEATURE	STANDARD METHOD	REQUIREMENTS	WALL TILE - VALUES
Caliber Range - Calibrated	ASTM C499	±0.50% or 0.08 in (2.0mm) [1]	±0.20%
Caliber Range - Rectified	ASTM C499	±0.25% or 0.03 in (0.8mm) [1]	±0.20%
Thickness [2]	ASTM C499	Range: ±0.04in (1.02mm)	COMPLIES
Wedging - Calibrated	ASTM C502	±0.50% or 0.08 in (2.0mm) [1]	±0.30%
Wedging - Rectified	ASTM C502	±0.25% or 0.03 in (0.8mm) [1]	±0.15%
Warpage Edge - Calibrated	ASTM C485	±0.75% or 0.09 in (2.3mm) [1]	±0.30%
Warpage Edge - Rectified	ASTM C485	±0.40% or 0.05 in (1.3mm) [3] or 1.8mm [4]	±0.25%
Breaking Strength	ASTM C648	Average ≥250 Lbf (1.11kN)/ Individual ≥225 Lbf (1.00kN)	COMPLIES
Water absorption	ASTM C373	≤0.50%	COMPLIES
Thermal Shock [5]	ASTM C484	PASS	PASS
Resistance to freeze/Thaw cycling [6]	ASTM C1026	AS REPORTED	NO DAMAGE
Visible Abrasion Resistance [5]	ASTM C1027-99	AS REPORTED	N/A
Chemical Resistance	ASTM C650	AS REPORTED	NOT AFFECTED
Stain Resistance	ASTM C1378	AS REPORTED	NOT AFFECTED
D.C.O.F.	ANSI A 137.1-2012 (Section 9.6)	≥ 0.42 Wet [7]	Glossy: N/A

[1] Whichever is less.
[2] May not apply to textured surfaces or tiles with uneven back patterns.
[3] Whichever is less, for tiles up to 24”x 24” (610mm x 610mm)
[4] Applies to tiles Larger than 24”x 24” (610mm x 610mm)
[5] Glazed tiles only.
[6] When installation subject to freeze/thaw conditions
[7] For Level interior spaces expected to be walked upon when wet.

FIORANO USA CITY LIGHTS

FIELD TILE & WALL TILE

PACKAGING

SIZES	METRIC (CM)	THICKNESS	PCS/BOX	UOM/BOX	WEIGHT/BOX	BOXES/PALLET	UOM/PALLET	WEIGHT/ PALLET*
WALL TILES								
3"x12" Glossy	7.5x30	8mm	60	15 SF	51 LBS	48	720 SF	2,448 LBS
6"x24" Glossy	15x60	8mm	15	15 SF	49.5 LBS	48	720 SF	2,376 LBS
WALL TILES - COORDINATING TRIMS								
Bullnose 6"x24" Glossy	15x60	8mm	15	15 PCS	49.5 LBS	48	720	2,376 LBS
FIELD TILES								
12"x12" Rectified	30x30	10mm	13	13 SF	57.2 LBS	48	624 SF	2,745.6 LBS
12"x24" Rectified	30x60	10mm	6	12 SF	52.8 LBS	48	576 SF	2,534.4 LBS
24"x24" Rectified	60x60	10mm	3	12 SF	52.8 LBS	36	432 SF	1,901 LBS
24"x48" Rectified	60x120	10mm	2	16 SF	76.8 LBS	32	512 SF	2,457.6 LBS
MOSAIC AND SPECIAL PIECES								
Mosaic 12"x12" (2"x2" pcs)	30x30	10mm	10	10 PCS	40 LBS	45	450 PCS	1,800 LBS
Bullnose 3"x12"	7.5x30	10mm	12	12 PCS	12.9 LBS	168	2,016 PCS	2,167.2 LBS
Cove Base 6"x12"	15x30	7mm	10	10 PCS	17.5 LBS	64	640 PCS	1,120 LBS

*Weight per pallet does NOT include the pallet weight itself.

Minimum grout size recommended = 5mm (approx. 3/16") if staggered tile placement, it is recommended to use a 30% offset.
If specified brick pattern mandatory, a bigger grout is recommended to hide imperfections of installation (minimum 1/4").

