


NAPOLI
FLAGSTONE

STONESOURCE

NAPOLI **FLAGSTONE**



Napoli Flagstone is dark grey verging on blue: it's a low-metamorphic grade sandstone rock, formed by the fragmentation of granitic rocks. A resistant ceramic surface that is also available in warmer shades, offering great potential for use in both architecture and urban furnishings, both indoors and outdoors.



CORDA




BEIGE



GRIGIO CHIARO



GRIGIO SCURO

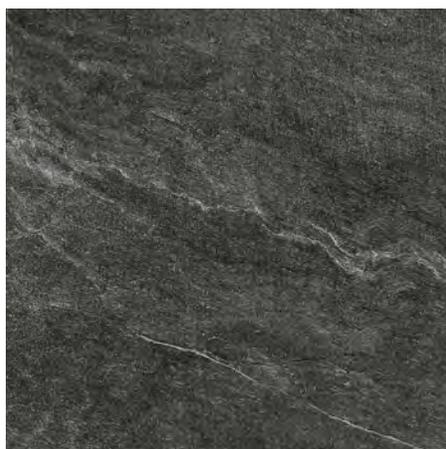

ANTRACITE





CORDA Natural 24"x24" Rectified


NAPOLI FLAGSTONE



FLOOR
CORDA Natural 12"x48" Rectified



WALL
CORDA Natural 12"x48" Rectified

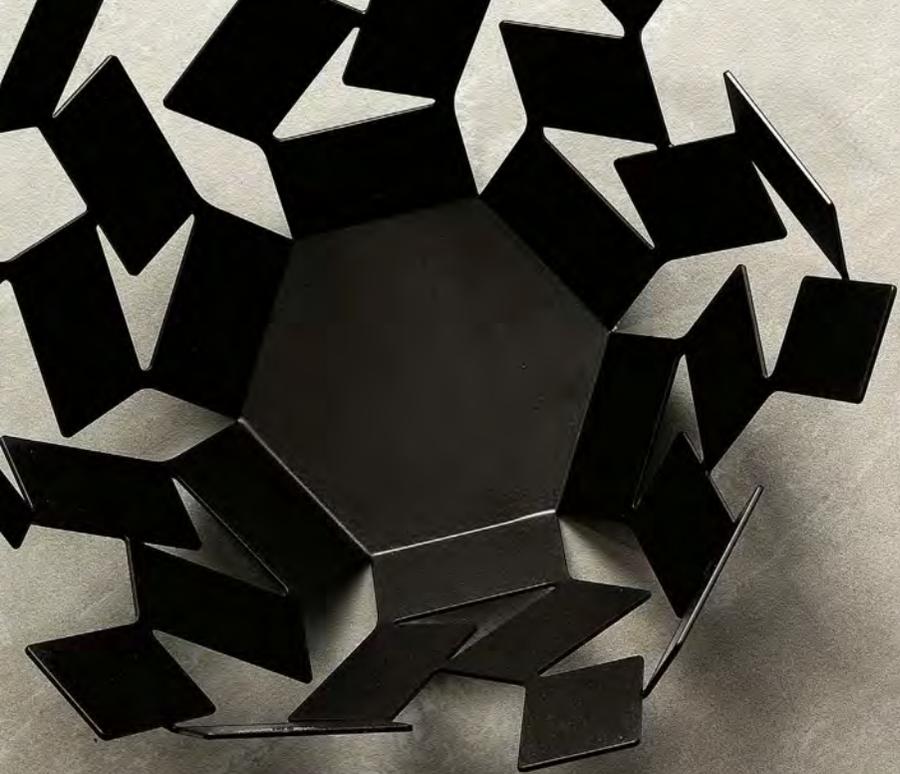



BEIGE Palladiana Textured



GRIGIO CHIARO Natural 24"x48" Rectified

NAPOLI FLAGSTONE



GRIGIO CHIARO Natural 24"x48" Rectified





OUTDOOR
GRIGIO SCURO Textured 24"x48" Rectified

INDOOR
GRIGIO CHIARO Natural 24"x48" Rectified



20MM OUTDOOR TILE
GRIGIO CHIARO Textured 24"x36" Rectified



GRIGIO SCURO Textured 24"x48" Rectified



GRIGIO SCURO Textured 24"x48" Rectified



ANTRACITE Textured 12"x24" Rectified

ANTRACITE Mosaico Palladiana Textured 12"x12"




ANTRACITE Mosaico Palladiana Textured 12"x12"



INDOOR
ANTRACITE Natural 12"x48" Rectified

OUTDOOR
GRIGIO CHIARO Textured 24"x48" Rectified




ANTRACITE Natural 12"x48" Rectified




CORDA




BEIGE

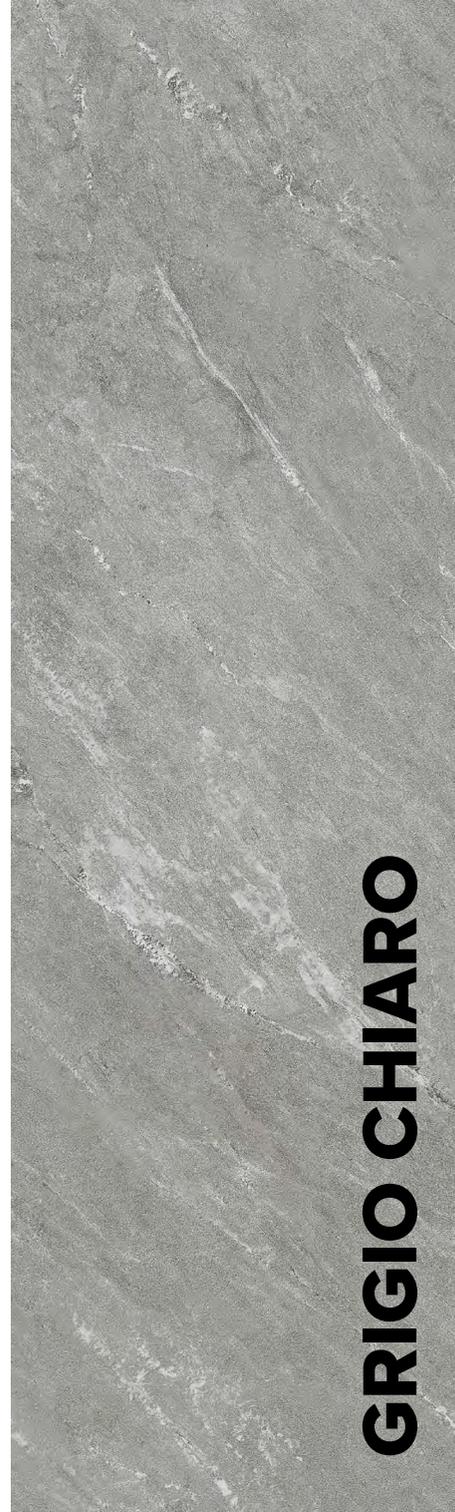

GRIGIO CHIARO

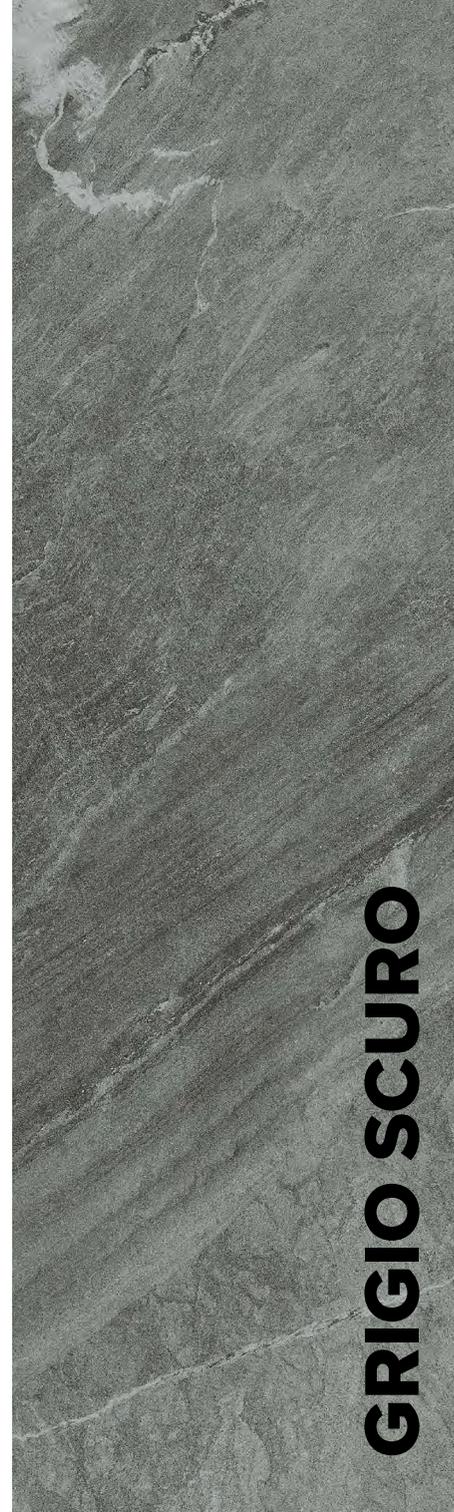

GRIGIO SCURO

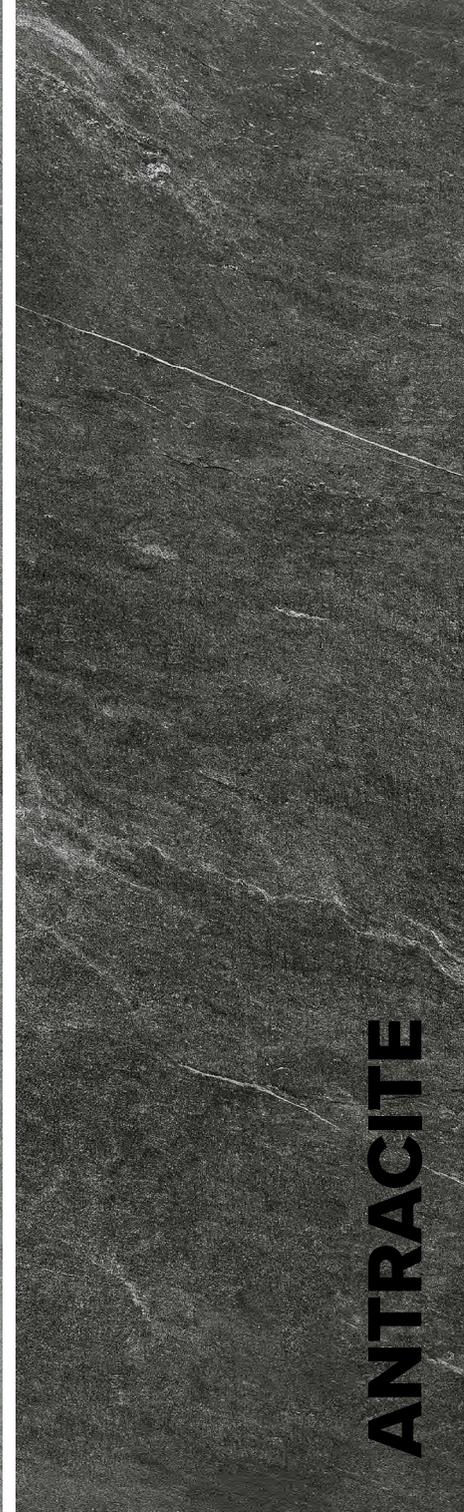

ANTRACITE

NAPOLI FLAGSTONE

COLOR AVAILABILITY

CORDA



BEIGE




GRIGIO CHIARO



GRIGIO SCURO



ANTRACITE

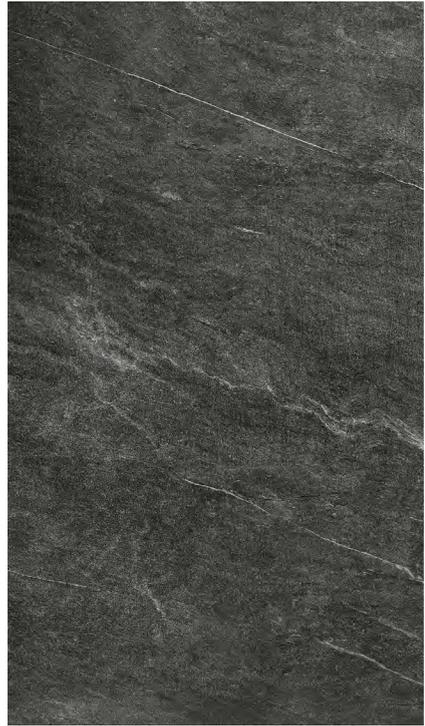


SIZE AVAILABILITY




24"x48" Rectified
Thickness: 10mm
Finish: Natural/Lappato/Textured
Available in all colors



12"x48" Rectified
Thickness: 10mm
Finish: Natural
Available in all colors

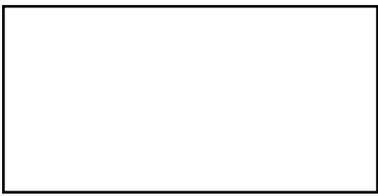

18"x36" Rectified
Thickness: 10mm
Finish: Natural/Lappato
Available in all colors



24"x24" Rectified
Thickness: 10mm
Finish: Natural/Lappato/Textured
Available in all colors



12"x24" Rectified
Thickness: 10mm
Finish: Natural/Lappato/Textured
Available in all colors

NAPOLI FLAGSTONE

DECORS

Mosaic 12"x12" Rectified (2"x2" Pcs)

Finish: Natural



CORDA




BEIGE



GRIGIO CHIARO




GRIGIO SCURO



ANTRACITE

Mosaico Palladiana 12"x12"


Finish: Textured

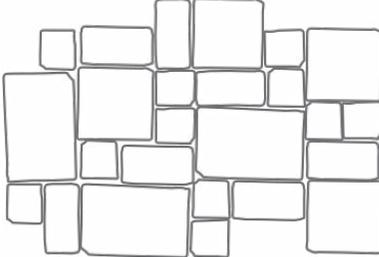

Available in all colors

Palladiana

Finish: Textured

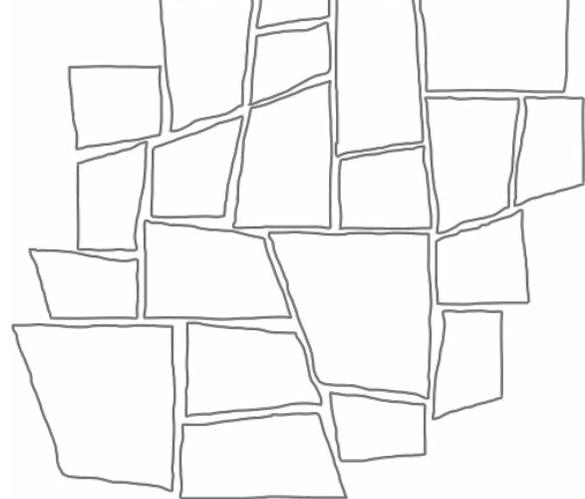

Available in all colors

NAPOLI FLAGSTONE

OUTDOOR TILE & 2CM PAVERS



24"x36" Rectified
Thickness: 20mm (2cm) - Finish: Textured
Available in: **Grigio Scuro** and **Antracite**.

OUTDOOR TILE & 2CM PAVERS - SPECIAL PIECES



Round Edge Element 12"x24" Rectified
Thickness: 20mm (2cm) - Finish: Textured
Available in: **Grigio Scuro** and **Antracite**.



Half Bullnose Element 12"x24" Rectified
Thickness: 20mm (2cm) - Finish: Textured
Available in: **Grigio Scuro** and **Antracite**.


SPECIAL PIECES




Bullnose 3"x24" Rectified
Finish: Natural/Lappato
Available in all colors



L-Shaped Element 12"x24"x2" Rectified
Finish: Natural
Available in all colors



L-Shaped Corner Element 12"x24"x2" Rectified DX/SX
Finish: Natural
Available in all colors



Step 12"x12"
Finish: Textured
Available in all colors



One-Piece L-Shaped Trom 6"x12"x1.5"
Finish: Textured
Available in all colors

NAPOLI FLAGSTONE

PACKAGING

ITEM	CM	PCS/BOX	SQM/BOX	KG/BOX	BOX/PAL	SQM/PAL	KG/PAL
24"x48"	60x120	2	1.44	32	35	50.40	1130
12"x48"	30x120	4	1.44	32	26	37.44	842
18"x36"	45x90	3	1.215	26	32	38.88	842
24"x24"	60x60	4	1.44	31.5	30	43.20	955
12"x24"	30x60	6	1.08	21.5	40	43.20	870
Mosaic 12"x12"	30x30	11 Sheets	0.99	19.5	-	-	-
Mosaico Palladiana	30x30	5 Sheets	0.45	10	-	-	-
Palladiana	-	Cp. 1	1.20	27	20	24	550
Bullnose 3"x24"	7.5x60	22	MI 13.2	22	-	-	-

NAPOLI FLAGSTONE

TECHNICAL CHARACTERISTICS EN 14411: 2012 Annex G Group Bla UGL

TECHNICAL CHARACTERISTICS	TEST METHOD	REQUIRED STANDARDS	VALUES
Sizes and look of the Tile	ISO 10545-2	Length and width: $\pm 0.6\%$ / $\pm 2.0\text{mm}$ Thickness: $\pm 5\%$ / $\pm 0.5\text{mm}$ Straightness of sides $\pm 0.5\%$ / $\pm 1.5\text{mm}$ Rectangularity: $\pm 0.5\%$ / $\pm 2.0\text{mm}$ Surface flatness: $\pm 0.5\%$ / $\pm 2.0\text{mm}$	Compliant
Water Absorption	ISO 10545-3	$\leq 0.5\%$	0.07%
Average Bending Strength	ISO 10545-4	35 N/mm ² min.	47.1 N/mm ²
Breaking Strength	ISO 10545-4	Thickness ≥ 7.5 mm: 1300N min.	Compliant
Resistance to Deep Abrasion	ISO 10545-6	175mm ³ max.	Compliant
Frost Resistance	ISO 10545-12	Required	Compliant
Chemical Resistance <i>Acid and Alkali low concentrations</i>	ISO 10545-13	According to the classification stated by the manufacturer	ULA Class
Chemical Resistance <i>Domestic use and swimming pool chemicals</i>	ISO 10545-13	min. UB	Compliant
Anti-slip Properties	DIN 51097	-	Natural: R10 Lappato: - Textured: R11
D.C.O.F.	ANSI A137.1 (BOT 3000)	≥ 0.42 Wet	Natural R10: 0.56 Wet Lappato: 0.45 Wet Textured R11: 0.59 Wet

The color of the tiles printed in this catalog may differ from actual tiles. Tile color reproductions in this brochure are representative only. Slight tone and shade variations are inherent in porcelain tiles. Before selecting a color, we recommend that you contact a CTL representative before selecting.

