

PALERMO
METALLIC DESIGN

STONESOURCE

OPAL

PEARL

SAND



CLAY

RUST

DEEP

PRODUCT INFORMATION

OPAL



48"x48" Rectified
Thickness: **9mm** Finishes: **Natural/Polished**



24"x48" Rectified
Thickness: **9.5mm**
Finishes: **Natural/Polished**



24"x24" Rectified
Thickness: **9.5mm**
Finishes: **Natural/Polished**



12"x24" Rectified
Thickness: **9.5mm** Finishes:
Natural/Polished

PRODUCT INFORMATION

PEARL



24"x48" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**



24"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**



12"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**

PRODUCT INFORMATION

SAND



48"x48" Rectified
Thickness: 9mm
Finishes: Natural/Polished



24"x48" Rectified
Thickness: 9.5mm
Finishes: Natural/Polished



24"x24" Rectified
Thickness: 9.5mm
Finishes: Natural/Polished



12"x24" Rectified
Thickness: 9.5mm
Finishes: Natural/Polished

PRODUCT INFORMATION

CLAY



24"x48" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**



24"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**



12"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**

PRODUCT INFORMATION

RUST



48"x48" Rectified
Thickness: 9mm
Finishes: **Natural/Polished**



24"x48" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**



24"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**



12"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**

PRODUCT INFORMATION

DEEP



48"x48" Rectified
Thickness: 9mm
Finishes: **Natural/Polished**



24"x48" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**



24"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**




12"x24" Rectified
Thickness: 9.5mm
Finishes: **Natural/Polished**

SIZE AVAILABILITY

	48"x48" Rectified	36"x36" Rectified	24"x48" Rectified	24"x24" Rectified	12"x24" Rectified
Thickness:	9mm	9.5mm			
OPAL	NT PL		NT PL	NT PL	NT PL
PEARL			NT LP	NT PL	NT PL
SAND	NT PL		NT PL	NT PL	NT PL
CLAY		NT PL	NT PL	NT PL	NT PL
RUST	NT PL		NT PL	NT PL	NT PL
DEEP	NT PL		NT PL	NT PL	NT PL
Finishes:	Natural: NT Polished: PL Grip: GR				

DECORS


GARAGE

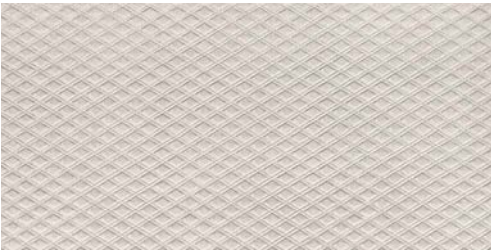


OPAL
Size: **Garage 12"x24" Rectified**
Thickness: **9.5mm**
Finish: **Natural**



PEARL
Size: **Garage 12"x24" Rectified**
Thickness: **9.5mm**
Finish: **Natural**

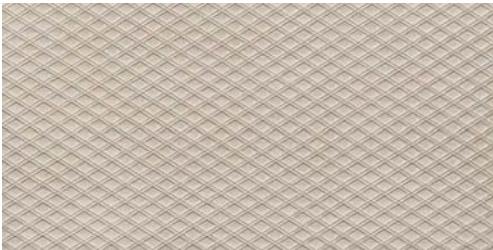


SAND
Size: **Garage 12"x24" Rectified**
Thickness: **9.5mm**
Finish: **Natural**

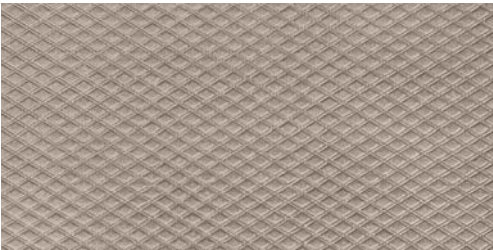

CLAY
Size: **Garage 12"x24" Rectified**
Thickness: **9.5mm**
Finish: **Natural**



RUST
Size: **Garage 12"x24" Rectified**
Thickness: **9.5mm**
Finish: **Natural**

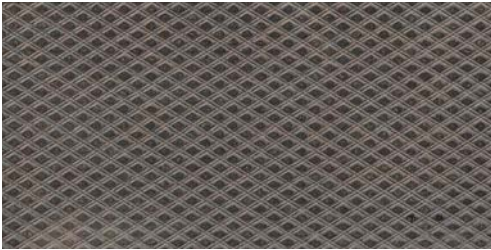

DEEP
Size: **Garage 12"x24" Rectified**
Thickness: **9.5mm**
Finish: **Natural**

DECORS

TENSEGRITY



OPAL
Size: **Tensegrity 12”x24” Rectified**
Thickness: **9.5mm**
Finish: **Natural**



PEARL
Size: **Tensegrity 12”x24” Rectified**
Thickness: **9.5mm**
Finish: **Natural**




SAND
Size: **Tensegrity 12”x24” Rectified**
Thickness: **9.5mm**
Finish: **Natural**



CLAY
Size: **Tensegrity 12”x24” Rectified**
Thickness: **9.5mm**
Finish: **Natural**






RUST
Size: **Tensegrity 12”x24” Rectified**
Thickness: **9.5mm**
Finish: **Natural**

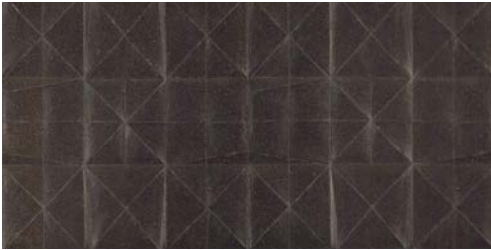

DEEP
Size: **Tensegrity 12”x24” Rectified**
Thickness: **9.5mm**
Finish: **Natural**

SPECIAL PIECES

	 Bullnose 1.75"x24" Rectified 9.5mm	 Straight Edge Step 12"x48" Rectified	 Bacchetta Jolly 0.5"x48" Rectified	 Unghia Jolly 0.5"x0.5" Rectified	 L-Shaped Piece 12"x36" Rectified*	 Step 12"x36" Rectified** 20mm	 Drain Gate 7"x36" Rectified* 20mm
THICKNESS		9.5mm	9.5mm	9.5mm	20mm		
OPAL	NT PL	NT PL	NT PL	NT PL			
PEARL	NT PL	NT PL	NT PL	NT PL			
SAND	NT PL	NT PL	NT PL	NT PL	GR	GR	GR
CLAY	NT PL	NT PL	NT PL	NT PL	GR	GR	GR
RUST	NT PL	NT PL	NT PL	NT PL			
DEEP	NT PL	NT PL	NT PL	NT PL	GR	GR	GR
Finishes:	Natural: NT Polished: PL Grip: GR						

**Obtained by cutting and gluing*
***Full bullnose edge*

PACKAGING

SIZES (inches)	SIZES (mm)	PCS/BOX	SQMT/BOX	KGS/BOX	BOXES/PALLET	SQMT/PALLET	KGS/PALLET	PALLET SIZE [cm]
48"x48" Rectified NT/PL	119.5x119.5	2	2.88	58.00	22	63.36	1276	132x132x53
24"x48" Rectified NT	60x119.5	2	1.44	31.00	30	43.02	930	120x80x75
24"x48" Rectified PL	60x119.5	2	1.44	32.00	30	43.02	960	120x80x75
24"x24" Rectified NT	60x60	4	1.44	29.00	32	46.08	928	120x80x75
24"x24" Rectified PL	60x60	4	1.44	30.00	32	46.08	960	120x80x75
12"x24" Rectified NT	30x60	7	1.26	25.30	40	50.4	1012	120x80x75
12"x24" Rectified PL	30x60	7	1.26	26.30	40	50.4	1052	120x80x75
Raku 12"x48" Rectified NT	30x119.5	2	0.717	15.50	30	21.51	465	120x80x45
Fusion 24"x24" Rectified NT	60x60	2	0.72	14.50	32	23.04	464	120x80x75
Garage 12"x24" Rectified NT	30x60	7	1.26	25.30	32	40.32	809.6	120x80x75
Tensegrity 12"x24" Rectified NT	30x60	7	1.26	25.30	32	40.32	809.6	120x80x75
Straight Edge Step 12"x48" Rectified NT/PL	30x119.5	2	0.717	17.00	20	-	-	-
Bullnose 1.75"x24" Rectified NT/PL	4.5x60	14	0.378 m.l. 8.40	8.00	80	-	-	-
Bacchetta Jolly 0.5"x48" Rectified NT/PL	1.5x119.5	6	0.108	2.50	48	-	-	-
Unghia Jolly 0.5"x0.5" Rectified NT/PL	1.5x1.5	6	0.001	0.50	48	-	-	-
Step 12"x36" Rectified GR	30x90	2	0.54	24.50	36	-	-	-
L-Shaped Piece 12"x36" Rectified GR	30x90	2	0.54	28.50	27	-	-	-
Drain Grate 7"x36" Rectified GR	18x90	1	0.162	7.50	48	-	-	-

TECHNICAL CHARACTERISTICS

CLASSIFICATION IN ACCORDANCE WITH CEN/ISO STANDARDS B1A EN 14411 - ISO 13006

TECHNICAL CHARACTERISTICS	NORM	REQUIRED VALUE	MEAN VALUE		USA TEST	MEAN VALUE	
Length and Width	ISO 10545-2	±0.6% (±2.00 mm)	In Accordance		ASTM C499 ASTM C485 ASTM C502	In Accordance	
Thickness		±5% (±0.5 mm)	In Accordance				
Warpages of Edges		±0.5% (±1.5 mm)	In Accordance				
Wedging		±0.5% (±2.00 mm)	In Accordance				
Flatness		±0.5% (±2.00 mm)	In Accordance				
Water Absorption	ISO 10545-3	≤ 0.5%	In Accordance		ASTM C373	In Accordance	
Bending Strength	ISO 10545-4	≥ 35N/mm²	In Accordance		ASTM C648 250 LBS or greater	In Accordance	
Linear Thermal Expansion Between 20° E and 100° C	ISO 10545-8	According to builder's specification	7X10 ⁻⁶ C ⁻¹				
Thermal Shock Resistance	ISO 10545-9	Request	Resistant				
Frost Resistance	ISO 10545-12	Request	Resistant		ASTM C1026	In Accordance	
Resistance to Chemical Attack	ISO 10545-13	According to builder's specification	Resistant		ASTM C650	In Accordance	
Colors Resistance to Light	DIN 51094	No alteration	In Accordance				
Stain Resistance	ISO 10545-14	≥ Class 3 Test mehtod available	In Accordance				
Slippage Resistance	DIN 51130	9 ≤ R ≤13	Natural	R10			
			Polished	-			
			Grip	R11			
	DIN 51097	A,B,C	Natural	A+B			
			Polished	-			
			Grip	A+B+C			
DCOF					ANSI 137.1-2012 ≥ 0.42 Wet	Natural	≥ 0.42 Wet
						Polished	-
						Grip	≥ 0.42 Wet



STONESOURCE