

SALERNO  
GEO STONE

STONESOURCE


SALERNO GEO STONE




BIANCO




BEIGE

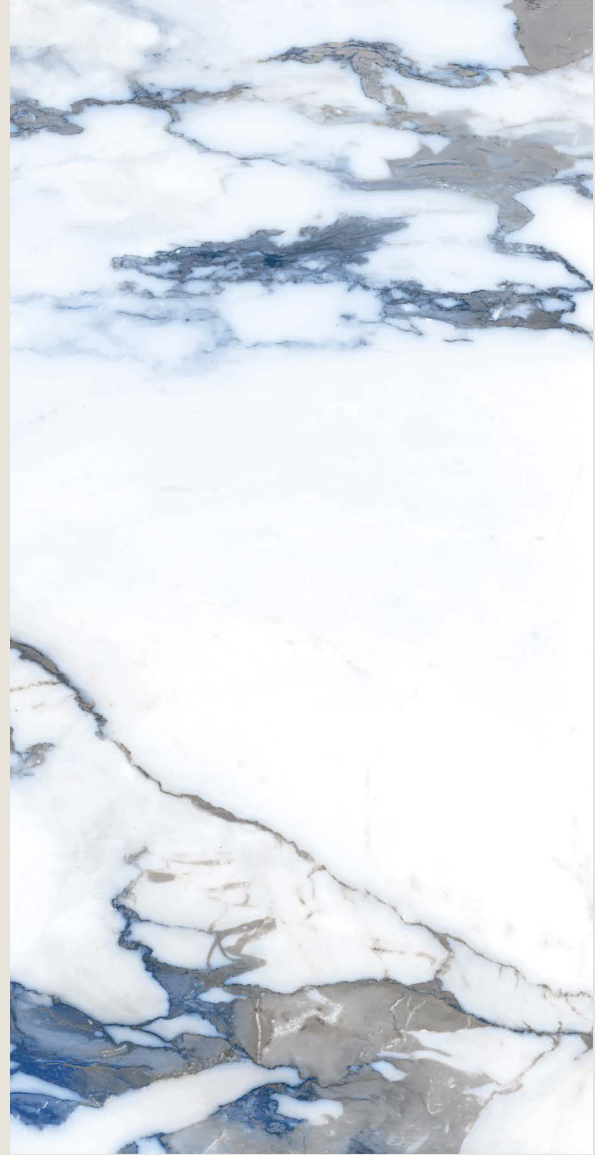


BLUE

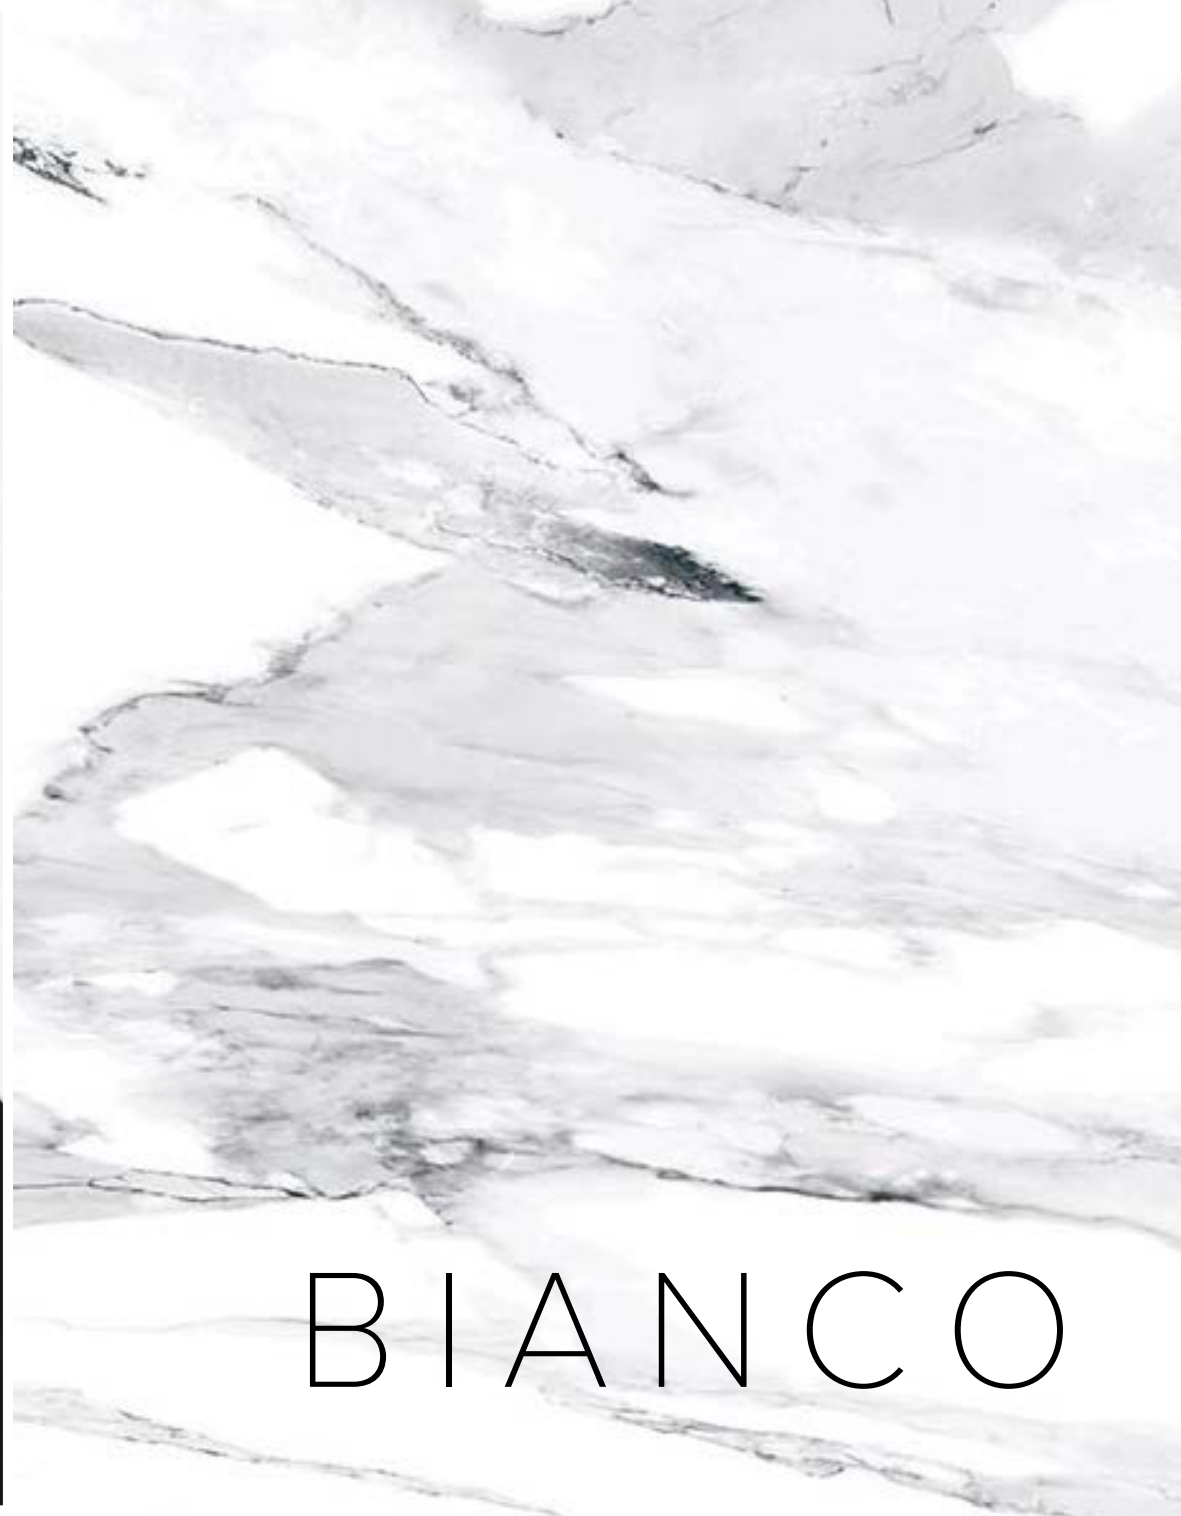

BIANCO

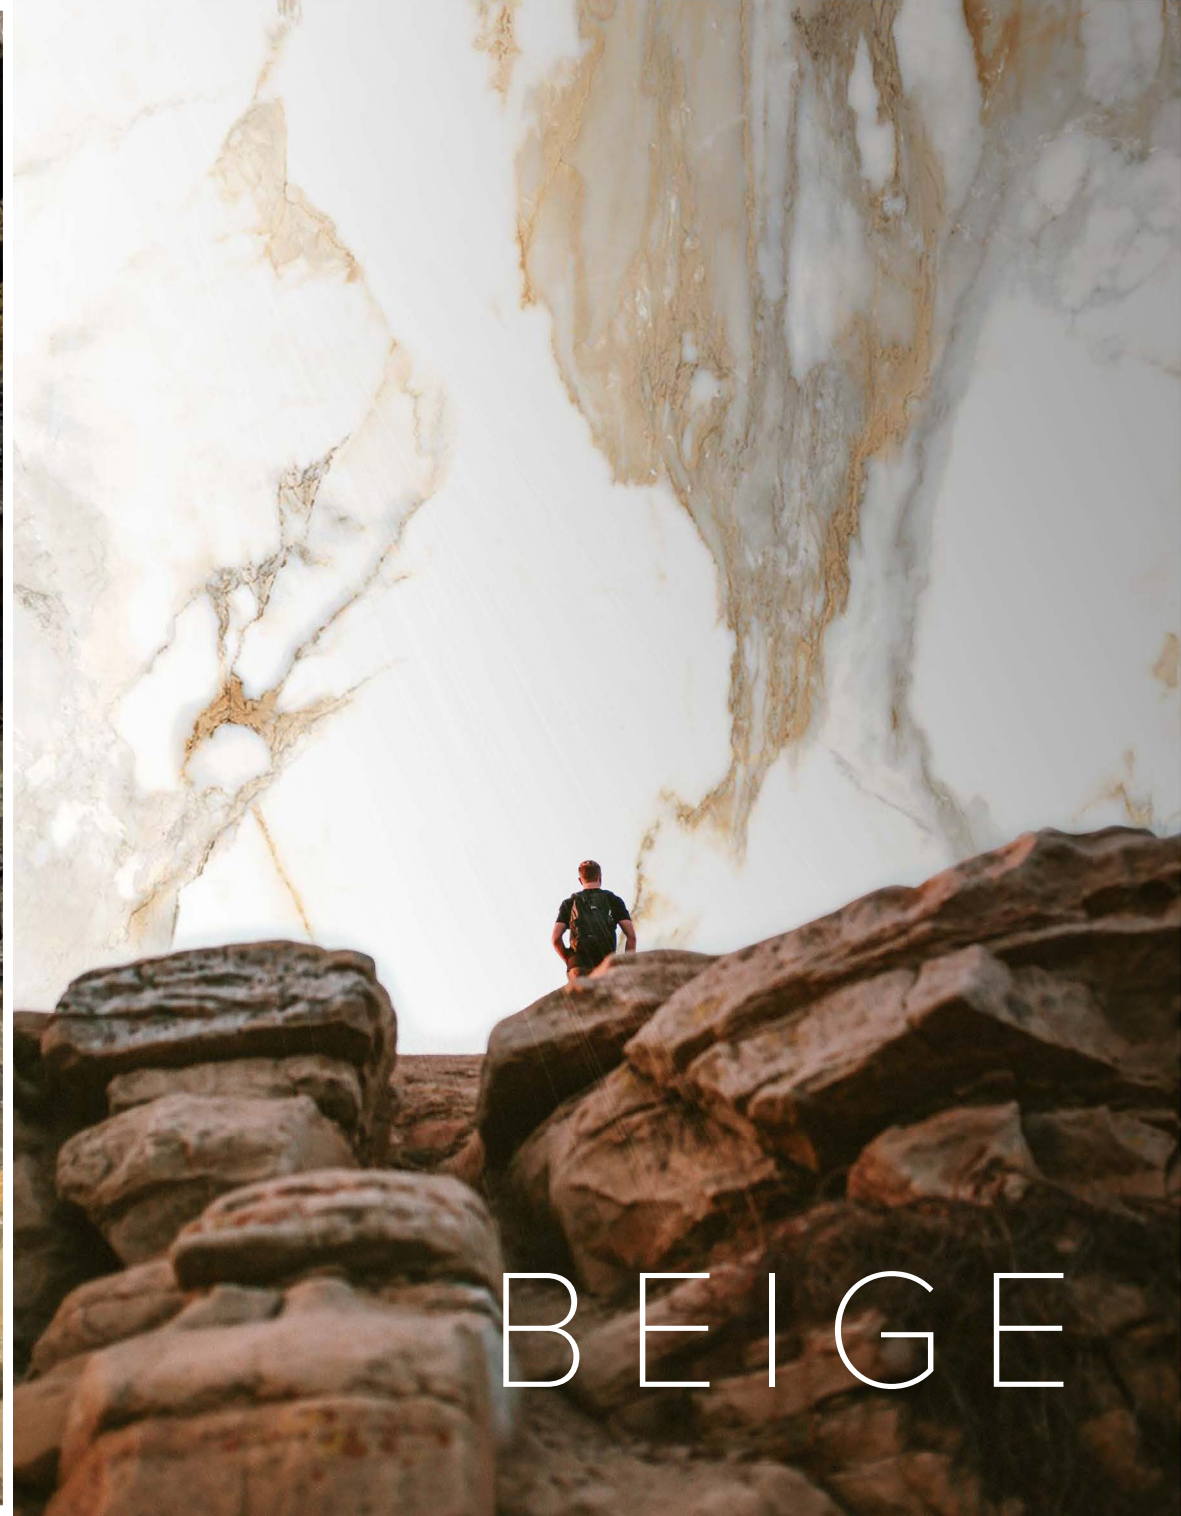

BEIGE

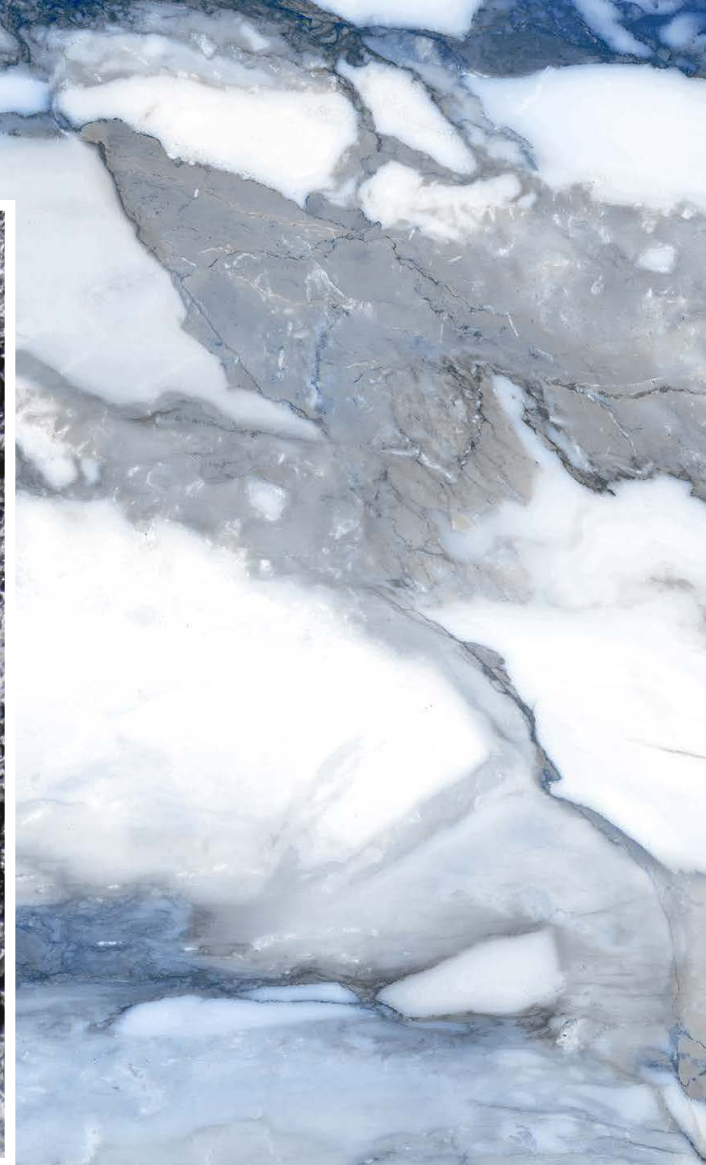

BLUE





BLUE





BEIGE



BEIGE





BIANCO



# SALERNO GEO STONE


RECTIFIED PORCELAIN - FOR WALL USE ONLY

## PRODUCT INFORMATION

### BIANCO



**36"x72" Rectified**  
Thickness: **11.5mm**  
Finish: **Natural/Polished**

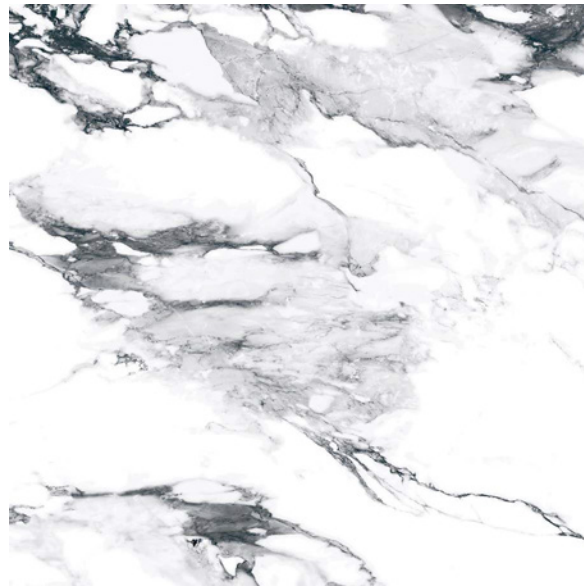

**48"x48" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**



**24"x48" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**



**30"x30" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**


**V2** SHADE VARIATION

# SALERNO GEO STONE

RECTIFIED PORCELAIN - FOR WALL USE ONLY

## PRODUCT INFORMATION


### BIANCO

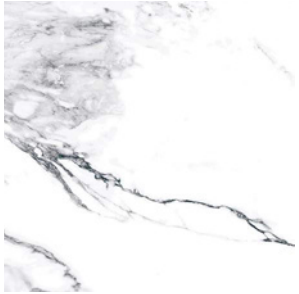

**24"x24" Rectified**  
Thickness: 10mm  
Finish: **Natural/Polished**



**12"x24" Rectified**  
Thickness: 10mm  
Finish: **Natural/Polished**



**Bullnose 3"x24"**  
Finish: **Natural/Polished**



**Mosaic 12"x12" Sheet**  
Chip Size: 2"x2" pcs.  
Finish: **Natural/Polished**



**Hexagon Mosaic 10"x14" Sheet**  
Finish: **Natural/Polished**



**Basketweave Mosaic 12"x12" Sheet**  
Finish: **Natural/Polished**

**V2** SHADE VARIATION

# SALERNO GEO STONE

RECTIFIED PORCELAIN - FOR WALL USE ONLY

## PRODUCT INFORMATION

### BEIGE



**36"x72" Rectified**  
Thickness: **11.5mm**  
Finish: **Natural/Polished**



**48"x48" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**



**24"x48" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**



**30"x30" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**

**V2** SHADE VARIATION

# SALERNO GEO STONE

RECTIFIED PORCELAIN - FOR WALL USE ONLY

## PRODUCT INFORMATION


### BEIGE



**24"x24" Rectified**  
Thickness: 10mm  
Finish: **Natural/Polished**



**12"x24" Rectified**  
Thickness: 10mm  
Finish: **Natural/Polished**



**Bullnose 3"x24"**  
Finish: **Natural/Polished**



**Mosaic 12"x12" Sheet**  
Chip Size: 2"x2" pcs.  
Finish: **Natural/Polished**



**Hexagon Mosaic 10"x14" Sheet**  
Finish: **Natural/Polished**



**Basketweave Mosaic 12"x12" Sheet**  
Finish: **Natural/Polished**


**V2** SHADE VARIATION

# SALERNO GEO STONE


RECTIFIED PORCELAIN - FOR WALL USE ONLY

## PRODUCT INFORMATION


### BLUE

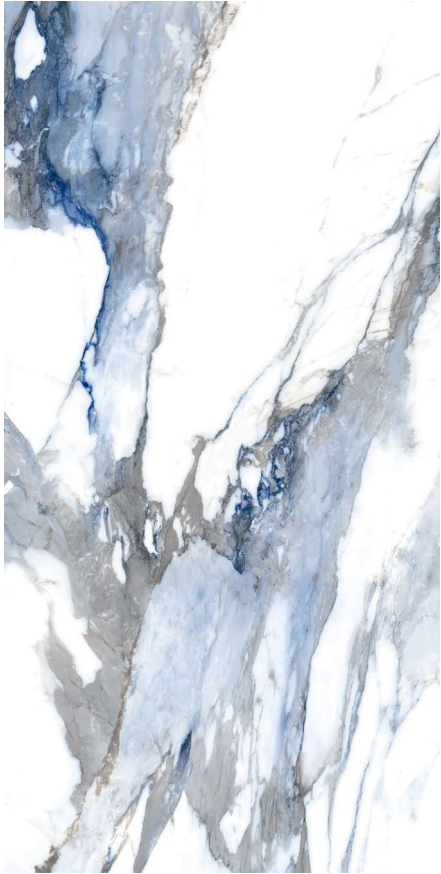


**36"x72" Rectified**  
Thickness: **11.5mm**  
Finish: **Natural/Polished**

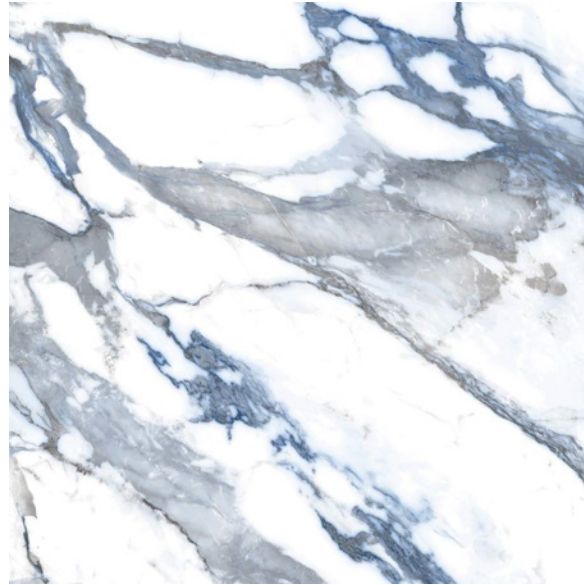

**48"x48" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**

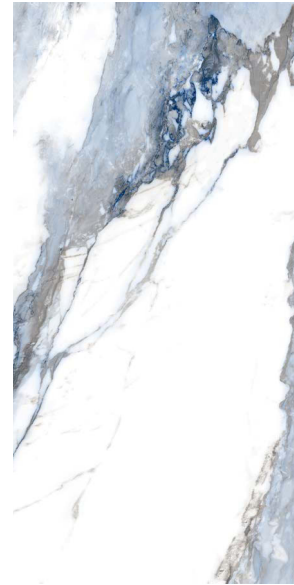

**24"x48" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**

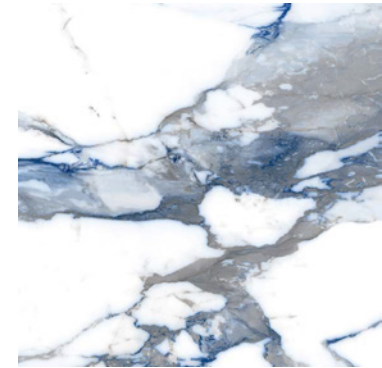

**30"x30" Rectified**  
Thickness: **10.5mm**  
Finish: **Natural/Polished**


**V2** SHADE VARIATION

# SALERNO GEO STONE

RECTIFIED PORCELAIN - FOR WALL USE ONLY

## PRODUCT INFORMATION


### BLUE



**24"x24" Rectified**  
Thickness: 10mm  
Finish: **Natural/Polished**



**12"x24" Rectified**  
Thickness: 10mm  
Finish: **Natural/Polished**



**Bullnose 3"x24"**  
Finish: **Natural/Polished**



**Mosaic 12"x12" Sheet**  
Chip Size: 2"x2" pcs.  
Finish: **Natural/Polished**



**Hexagon Mosaic 10"x14" Sheet**  
Finish: **Natural/Polished**



**Basketweave Mosaic 12"x12" Sheet**  
Finish: **Natural/Polished**

**V2** SHADE VARIATION

# SALERNO GEO STONE

RECTIFIED PORCELAIN - FOR WALL USE ONLY

## TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS	STANDARD REQUIREMENTS	RESULTS	
Water Absorption UNI EN ISO 10545-03	<0.5%	E <0.1%	
Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	1800-2400N	
Breaking Strength UNI EN ISO 10545-04	Minimum: 35 N/mm <sup>2</sup>	45-55 N/mm <sup>2</sup>	
Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm <sup>3</sup>	175 mm <sup>3</sup>	
Thermal Linear Expansion UNI EN ISO 10545-08	Minimum for Floor Applications: Class 3	7.0x10 <sup>6</sup> °C	
Thermal Shock Resistance UNI EN ISO 10545-09	Resistant	Resistant	
Moisture Exposure UNI EN ISO 10545-10	As Reported	< 0.1	
Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant	
Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB	Conforms to standard	
	Acids and Alkalis: As Reported	GA   GB	
Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 3	
PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	<b>NATURAL</b>	<b>POLISHED</b>
		PEI IV	-
Static Coefficient of Friction (COF) ASTM C 1028	For level interior spaces expected to be walked upon when wet: > 0.60	Dry: < 0.60 Wet: < 0.60	Dry: < 0.60 Wet: < 0.60
Dynamic Coefficient of Friction (DCOF) ANSI A 137.1	For level interior spaces expected to be walked upon when wet: > 0.42	> 0.42 Wet	> 0.42 Wet
Shade Variation	As Reported	V2	
Number of Screens	As Reported	12"x24": 56 30"x30": 28 24"x48": 14 36"x72": 6 48"x48": 7	

Rectified Porcelain  
Shade Variation V2  
Recycled Content ≥ 40%



