


STUDIO ELEMENTS
SOLID


STONESOURCE

Colors at a glance

A graphic color scheme, inspired by the spectrum of monochromatic essentials: dramatic nuances to enhance both classic and modern interiors.

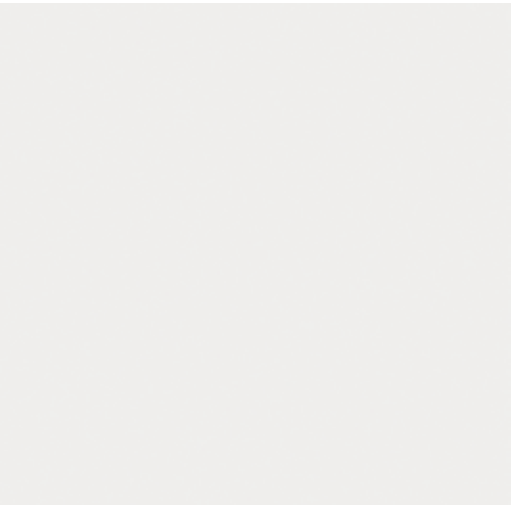

True White (Glazed Porcelain)

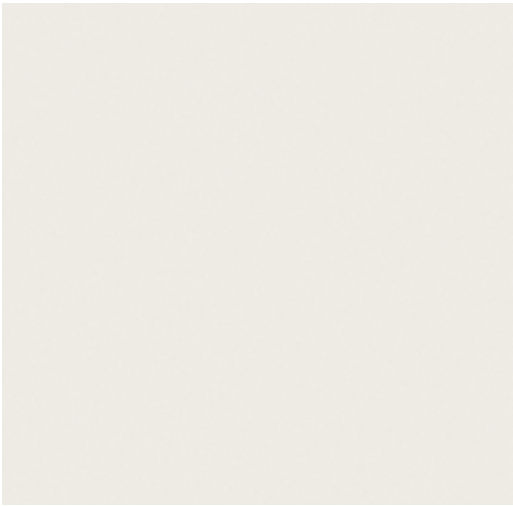

Warm White



Smoke



Mica



Charcoal

Formats and finishes at a glance

This collection offers a selection of formats and sizes, including large tiles, mosaics, and complementary trim.




24 x 24 in / 60 x 60 cm
Rectified
Polished* / Matte



24 x 48 in / 60 x 120 cm*
Rectified
Polished / Matte

* Only available in True White (Glazed Porcelain)



12 x 12 in / 29.8 x 29.8 cm
Rectified
Polished* / Matte




12 x 24 in / 29.8 x 60 cm
Rectified
Polished* / Matte

Trim



3 x 24 in / 7.2 x 60 cm
Bullnose
Polished* / Matte

Mosaic



2 x 2 in / 5 x 5 cm
Mosaics
Matte




12 x 24 in / 29.8 x 60 cm Smoke Matte Rectified Tile 6


Contemporary Inspiration

UNGLAZED PORCELAIN


True White (Glazed Porcelain)

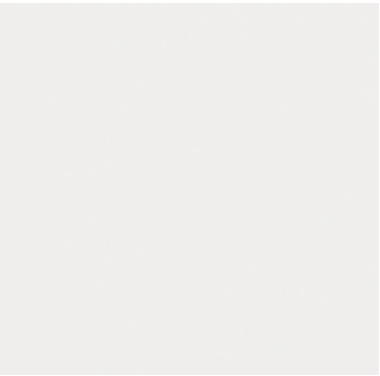


24 x 24 in / 60 x 60 cm
Rectified
Polished 4500-0586-1
Matte 4500-0584-1

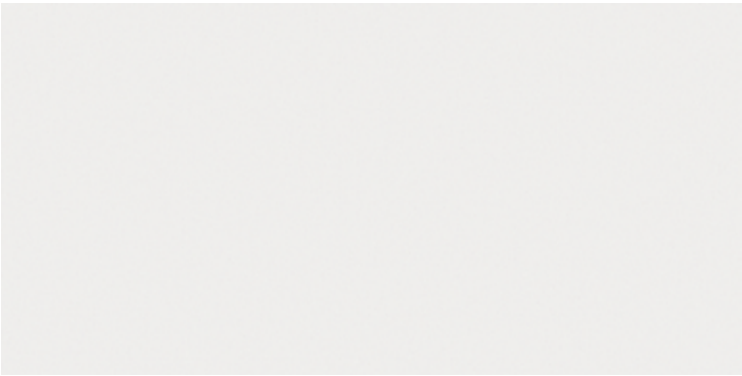

24 x 48 in / 60 x 120 cm
Rectified
Polished 4500-0948-1
Matte 4500-0949-1




12 x 12 in / 29.8 x 29.8 cm
Rectified
Polished 4500-0582-1
Matte 4500-0581-1

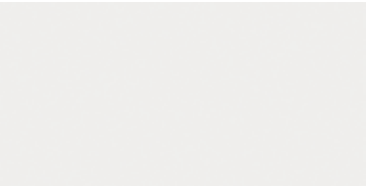

12 x 24 in / 29.8 x 60 cm
Rectified
Polished 4500-0585-1
Matte 4500-0583-1

Trim




3 x 24 in / 7.2 x 60 cm
Bullnose
Polished 4502-0197-1
Matte 4502-0196-1

Mosaic




2 x 2 in / 5 x 5 cm
Mosaic
Matte 4501-0209-1


Warm White

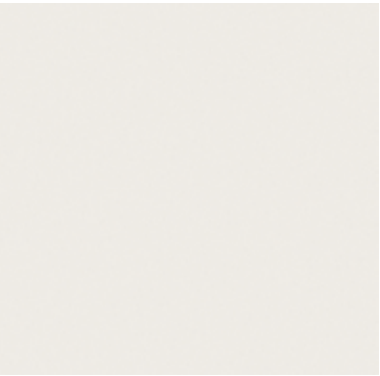

24 x 24 in / 60 x 60 cm
Rectified
Matte 4500-0591-1




12 x 12 in / 29.8 x 29.8 cm
Rectified
Matte 4500-0588-1

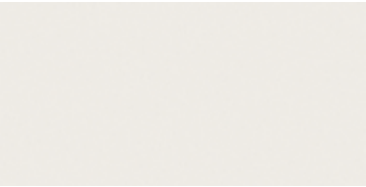

12 x 24 in / 29.8 x 60 cm
Rectified
Matte 4500-0590-1

Trim



3 x 24 in / 7.2 x 60 cm
Bullnose
Matte 4502-0198-1

Mosaic



2 x 2 in / 5 x 5 cm
Mosaic
Matte 4501-0210-1

Smoke



24 x 24 in / 60 x 60 cm
Rectified
Matte 4500-0577-1




12 x 24 in / 29.8 x 60 cm
Rectified
Matte 4500-0576-1

Trim



3 x 24 in / 7.2 x 60 cm
Bullnose
Matte 4502-0194-1

Mosaic



2 x 2 in / 5 x 5 cm
Mosaic
Matte 4501-0208-1



12 x 24 in / 29.8 x 60 cm Smoke Matte Rectified Tile

Mica



24 x 24 in / 60 x 60 cm
Rectified
Matte 4500-0573-1



12 x 24 in / 29.8 x 60 cm
Rectified
Matte 4500-0572-1

Trim



3 x 24 in / 7.2 x 60 cm
Bullnose
Matte 4502-0192-1

Mosaic




2 x 2 in / 5 x 5 cm
Mosaic
Matte 4501-0207-1

Charcoal



24 x 24 in / 60 x 60 cm
Rectified
Matte 4500-0561-1



12 x 12 in / 29.8 x 29.8 cm
Rectified
Matte 4500-0558-1



12 x 24 in / 29.8 x 60 cm
Rectified
Matte 4500-0560-1

Trim



3 x 24 in / 7.2 x 60 cm
Bullnose
Matte 4502-0186-1

Mosaic



2 x 2 in / 5 x 5 cm
Mosaic
Matte 4501-0204-1

Packaging information, *Glazed Porcelain, True White Color Only*

Key logistical details including item codes and product specifications.

Product & Packaging Information <i>Glazed Porcelain, True White Color Only</i>											
	ACTUAL DIMENSIONS	THICKNESS	TRUE WHITE ITEM CODE	LBS BOX	KGS BOX	PCS BOX	SQFT BOX	M² BOX	BXS SKID	SQFT SKID	M² SKID
24 x 48 in / 60 x 120 cm MATTE RECTIFIED GLAZED PORCELAIN TILE	600 x 1200 mm	9.5 mm	4500-0949-1	68.14	30.91	2	15.5	1.44	33	511.5	47.52
24 x 48 in / 60 x 120 cm POLISHED RECTIFIED GLAZED PORCELAIN TILE	600 x 1200 mm	9.5 mm	4500-0948-1	68.14	30.91	2	15.5	1.44	33	511.5	47.52
24 x 24 in / 60 x 60 cm MATTE RECTIFIED GLAZED PORCELAIN TILE	600x 600 mm	9 mm	4500-0584-1	64.91	29.44	4	15.5	1.44	36	558	51.84
24 x 24 in / 60 x 60 cm POLISHED RECTIFIED GLAZED PORCELAIN TILE	600 x 600 mm	9 mm	4500-0586-1	64.91	29.44	4	15.5	1.44	36	558	51.84
12 x 24 in / 29.8 x 60 cm MATTE RECTIFIED GLAZED PORCELAIN TILE	298 x 600 mm	9 mm	4500-0583-1	64.17	29.11	8	15.39	1.43	36	554.04	51.48
12 x 24 in / 29.8 x 60 cm POLISHED RECTIFIED GLAZED PORCELAIN TILE	298 x 600 mm	9 mm	4500-0585-1	64.3	29.17	8	15.39	1.43	36	554.04	51.48
12 x 12 in / 29.8 x 29.8 cm MATTE RECTIFIED GLAZED PORCELAIN TILE	298 x 298 mm	9 mm	4500-0581-1	44.02	19.97	11	10.55	0.98	56	590.8	54.88
12 x 12 in / 29.8 x 29.8 cm POLISHED RECTIFIED GLAZED PORCELAIN	298 x 298 mm	8.5 mm	4500-0582-1	44.02	19.97	11	10.55	0.98	56	590.8	54.88
MOSAIC											
2 x 2 in / 5 x 5 cm MATTE GLAZED PORCELAIN MOSAIC	299 x 299 mm	9 mm	4501-0209-1	41.11	18.65	10	9.58	0.89	45	431.1	40.05
TRIMS											
3 x 24 in / 7.1 x 60 cm MATTE GLAZED PORCELAIN BULLNOSE	70.5 x 600 mm	9 mm	4502-0196-1	29.91	13.57	15	N/A	N/A	56	840 PCS	840 PCS
3 x 24 in / 7.1 x 60 cm POLISHED GLAZED PORCELAIN BULLNOSE	70.5 x 600 mm	8.5 mm	4502-0197-1	29.91	13.57	15	N/A	N/A	56	840 PCS	840 PCS

Technical information, *Glazed Porcelain, True White Color Only*

Tile collection performance based on industry standards.

Technical Information <i>Glazed Porcelain, True White Color Only</i>		POLISHED		MATTE
	WATER ABSORPTION	ANSI / ISO - (%)	< 0.5%	
	DEEP / ABRASION RESISTANCE	ANSI / ISO	4	
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	6	
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	≥450 ≥2000	
	SHADE VARIATION		V1	
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	POLISHED ≥0.42 DRY (ID) POLISHED R (-)	MATTE ≥0.42 (ID, IW) MATTE R (-)
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS A	
	STAIN RESISTANCE	ANSI ISO	CLASS B CLASS 4	CLASS A CLASS 5
	FROST RESISTANCE	ANSI / ISO	PASS	

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.

Usage recommendations

Usage Recommendations*, <i>True White</i>					
		POLISHED GLAZED PORCELAIN		MATTE GLAZED PORCELAIN	
APPLICATION		WALL	FLOOR	WALL	FLOOR
INTERIOR	RESIDENTIAL	•	ID	•	ID, IW
	COMMERCIAL	•	ID	•	ID, IW
	HEAVY COMMERCIAL	•	ID	•	ID, IW
EXTERIOR	RESIDENTIAL / COMMERCIAL	•		•	

* These recommendations are not defined by ANSI/ISO standards.

DCOF Classifications per ANSI A326.3: (ID): Interior, Dry (IW): Interior, Wet (IW+): Interior, Wet Plus (EW): Exterior, Wet (O/G): Oils/Greases

* Factors other than the noted DCOF result must also be taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface texture, effect of structure on the DCOF measurement, number of grout joints, traction-enhancing features, and intended use in addition to the other criteria noted in standard ANSI A326.3

Packaging information, *Unglazed Porcelain*

Key logistical details including item codes and product specifications.

Product & Packaging Information Unglazed Porcelain														
	ACTUAL DIMENSIONS	THICKNESS	CHARCOAL ITEM CODE	MICA ITEM CODE	SMOKE ITEM CODE	WARM WHITE ITEM CODE	LBS BOX	KGS BOX	PCS BOX	SQFT BOX	M² BOX	BXS SKID	SQFT SKID	M² SKID
24 x 24 in / 60 x 60 cm MATTE RECTIFIED UNGLAZED PORCELAIN TILE	600 x 600 mm	9 mm	4500-0561-1	4500-0573-1	4500-0577-1	4500-0591-1	64.85	29.42	4	15.5	1.44	36	558	51.84
12 x 24 in / 29.8 x 60 cm MATTE RECTIFIED UNGLAZED PORCELAIN TILE	298 x 600 mm	9 mm	4500-0560-1	4500-0572-1	4500-0576-1	4500-0590-1	64.17	29.11	8	15.39	1.43	36	554.04	51.48
12 x 12 in / 29.8 x 29.8 cm MATTE RECTIFIED UNGLAZED PORCELAIN TILE	298 x 298 mm	9 mm	4500-0558-1	N/A	N/A	4500-0588-1	36.6	16.6	11	10.55	0.98	56	590.8	54.88
MOSAIC														
2 x 2 in / 5 x 5 cm MATTE UNGLAZED PORCELAIN MOSAIC	299 x 299 mm	9 mm	4501-0204-1	4501-0207-1	4501-0208-1	4501-0210-1	41.11	18.65	10	9.58	0.89	45	431.1	40.05
TRIM														
3 x 24 in / 7.4 x 60 cm MATTE UNGLAZED PORCELAIN BULLNOSE	72.5 x 603 mm	9 mm	4502-0186-1	4502-0192-1	4502-0194-1	4502-0198-1	30.36	13.77	15	N/A	N/A	56	840 PCS	840 PCS

Technical information, *Unglazed Porcelain*

Tile collection performance based on industry standards.

Technical Information Unglazed Porcelain			MATTE
	WATER ABSORPTION	ANSI / ISO - (%)	< 0.5%
	DEEP / ABRASION RESISTANCE	ANSI / ISO	136
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	9
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	≥ 500 ≥ 2200
	SHADE VARIATION		V1
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	MATTE ≥0.42 (ID, IW) MATTE R (-)
	CHEMICAL RESISTANCE	ANSI ISO	CLASS A
	STAIN RESISTANCE	ANSI ISO	CLASS A CLASS 5
	FROST RESISTANCE	ANSI / ISO	PASS

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.

Usage recommendations

Usage Recommendations*, Warm White, Mica, Smoke, Charcoal			MATTE UNGLAZED PORCELAIN
APPLICATION		WALL	FLOOR
INTERIOR	RESIDENTIAL	•	ID, IW
	COMMERCIAL	•	ID, IW
	HEAVY COMMERCIAL	•	ID, IW
EXTERIOR	RESIDENTIAL / COMMERCIAL	•	

* These recommendations are not defined by ANSI/ISO standards.

DCOF Classifications per ANSI A326.3: (ID): Interior, Dry (IW): Interior, Wet (IW+): Interior, Wet Plus (EW): Exterior, Wet (O/G): Oils/Greases

* Factors other than the noted DCOF result must also be taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface texture, effect of structure on the DCOF measurement, number of grout joints, traction-enhancing features, and intended use in addition to the other criteria noted in standard ANSI A326.3

