

STUDIO ELEMENTS

Vintage Wood

STONESOURCE

Vintage Wood, *Glazed Porcelain*.

The natural and timeless appeal of wood
reinterpreted in porcelain.



STONESOURCE

Colors at a glance



Dune



Saddle



Cinnamon



Ash



Carbon

Formats and finishes at a glance



6 x 36 in / 14.8 x 90.2 cm
Pressed
Matte



6 x 24 in / 14.8 x 60.1 cm
Pressed
Matte



Vintage Wood, *Dune*



6 x 36 in / 14.8 x 90.2 cm
Pressed
Matte 4500-0709-0



6 x 24 in / 14.8 x 60.1 cm
Pressed
Matte 4500-0708-0



6 x 36 in / 14.8 x 90.2 cm image variations

Vintage Wood, *Saddle*



6 x 36 in / 14.8 x 90.2 cm
Pressed
Matte 4500-0711-0



6 x 24 in / 14.8 x 60.1 cm
Pressed
Matte 4500-0710-0



6 x 36 in / 14.8 x 90.2 cm image variations

Vintage Wood, *Cinnamon*



6 x 36 in / 14.8 x 90.2 cm
Pressed
Matte 4500-0707-0



6 x 24 in / 14.8 x 60.1 cm
Pressed
Matte 4500-0706-0



6 x 36 in / 14.8 x 90.2 cm image variations

Vintage Wood, *Ash*



6 x 36 in / 14.8 x 90.2 cm
Pressed
Matte 4500-0703-0



6 x 24 in / 14.8 x 60.1 cm
Pressed
Matte 4500-0702-0



6 x 36 in / 14.8 x 90.2 cm image variations


Vintage Wood, *Carbon*



6 x 36 in / 14.8 x 90.2 cm
Pressed
Matte 4500-0705-0



6 x 24 in / 14.8 x 60.1 cm
Pressed
Matte 4500-0704-0

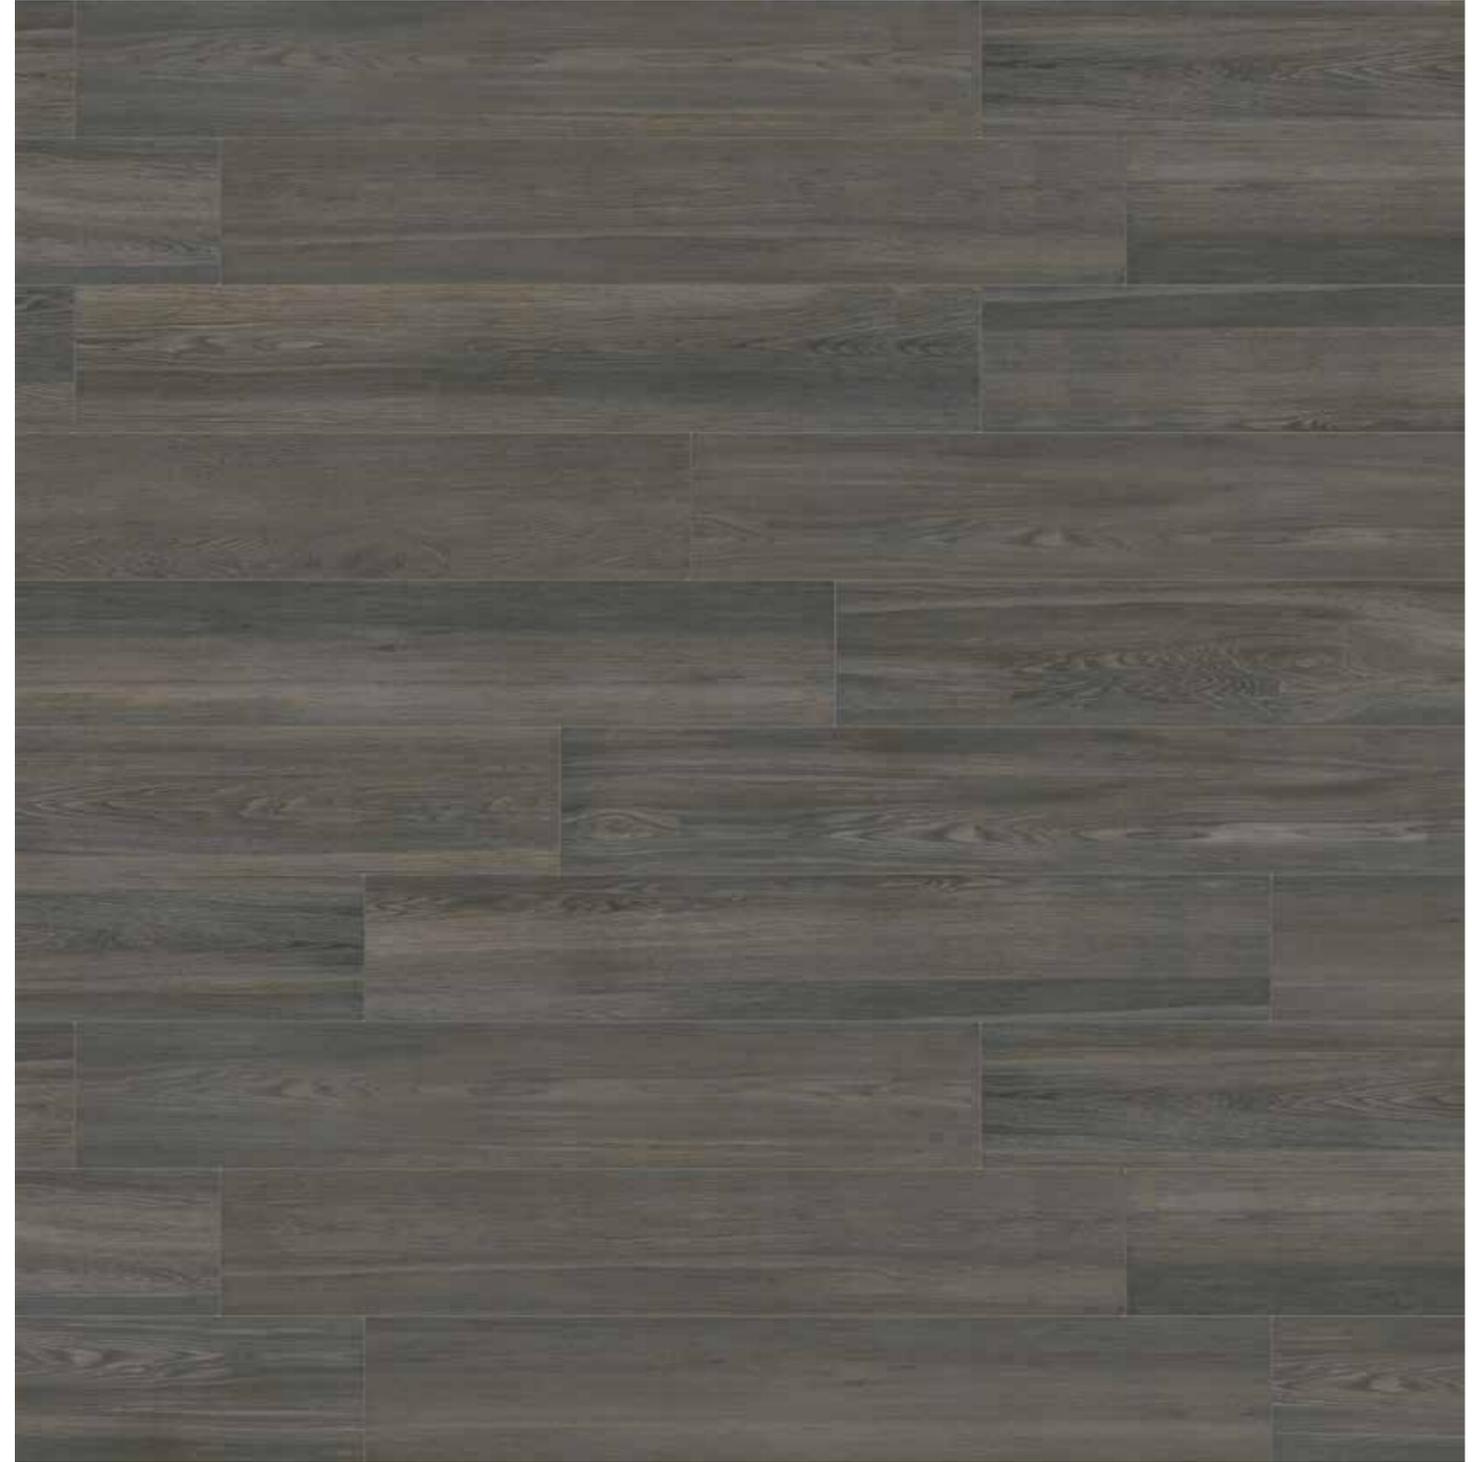

6 x 36 in / 14.8 x 90.2 cm image variations

Unmatched elegance and unparalleled perfection.

Studio Elements Vintage Wood reinvents shapes and design compositions through refined color palettes, innovative graphical refinements and creative reinterpretations of traditional, cultural and trend led inspirations. Meticulous care is taken to enhance a product's formation through graphical and technical improvements at every step of the development and execution process. This leads to the most exquisite and discerning tile collections.

Wood Inspiration



VINTAGE WOOD, GLAZED PORCELAIN



Technical Performance
Avant-garde design and attention
to detail.

Packaging information

Key logistical details including item codes and product specifications.

Studio Elements Vintage Wood Product & Packaging Information

	ACTUAL DIMENSIONS	THICKNESS	ASH ITEM CODE	CARBON ITEM CODE	CINNAMON ITEM CODE	DUNE ITEM CODE	SADDLE ITEM CODE	LBS BOX	KGS BOX	PCS BOX	SQFT BOX	M ² BOX	BXS SKID	SQFT SKID	M ² SKID
6 x 36 in / 14.8 x 90.2 cm MATTE PRESSED GLAZED TILE	148 x 902 mm	9 mm	4500-0703-0	4500-0705-0	4500-0707-0	4500-0709-0	4500-0711-0	45.84	20.79	8	12	1.08	39	468	42.12
6 x 24 in / 14.8 x 60.1 cm MATTE PRESSED GLAZED TILE	148 x 601 mm	9 mm	4500-0702-0	4500-0704-0	4500-0706-0	4500-0708-0	4500-0710-0	53.84	24.42	14	14	1.26	40	560	50.4

Technical information

Tile collection performance based on industry standards.

Technical Information

	WATER ABSORPTION	ANSI / ISO - (%)	< 0.5%
	ABRASION RESISTANCE	ANSI / ISO	CLASS 4
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	8
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	≥350 ≥1500
	SHADE VARIATION		V2
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	MATTE ≥0.50 (ID, IW, IW+) MATTE R10
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS A
	STAIN RESISTANCE	ANSI / ISO	CLASS A / CLASS 5
	FROST RESISTANCE	ANSI / ISO	PASS

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.

Usage recommendations

Recommendations for suitable applications.

Usage Recommendations*		MATTE GLAZED PORCELAIN	
APPLICATION		WALL	FLOOR
INTERIOR	RESIDENTIAL	•	ID, IW, IW+
	COMMERCIAL	•	ID, IW, IW+
	HEAVY COMMERCIAL	•	
EXTERIOR	RESIDENTIAL / COMMERCIAL	•	

* These recommendations are not defined by ANSI/ISO standards.

DCOF Classifications per ANSI A326.3: (ID): Interior, Dry (IW): Interior, Wet (IW+): Interior, Wet Plus (EW): Exterior, Wet (O/G): Oils/Greases

* Factors other than the noted DCOF result must also be taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface texture, effect of structure on the DCOF measurement, number of grout joints, traction-enhancing features, and intended use in addition to the other criteria noted in standard ANSI A326.3

