



---

Attune

**Mannington®**  
COMMERCIAL



**Cover: Attune** - Southern Oak Winchester ATT-5613R  
**Above: Attune** - Ironside Oak Muted ATT-5701R, Wellspring Vida ATT-B305





Made in the USA

Built on Its TRU® Technology, Attune heterogeneous sheet offers unique benefits in ergonomics and acoustics. In healing environments where reduced stress and rest are necessities, Attune delivers multiple advantages.

### **Nautral Beauty, Outstanding Performance**

- 28 colors available in wood and abstract visuals
- All patterns and colors cross over to standard 2mm heterogeneous sheet
- Long-term durability
- Easy Maintenance

### **Acoustic & Ergonomic Benefits**

- Reduces sound levels to support the healing environment
- Reduces fatigue from standing and walking
- Can withstand heavy rolling loads

### **Install with IdealBase®**

- Replaces traditional flash coving
- Create a sanitary transition up the wall
- Provides cost savings and enhanced performance with an aesthetically clean design

### **15-Year Quantum Guard Elite® Wear Warranty**

### **105% Carbon Offset**

- Recognizing the impact that the built environment can have on Earth's climate and health, Mannington Commercial is improving operations and offsetting cradle to gate embodied carbon by 105% on our domestically manufactured flooring products as part of our commitment to helping customers take positive action through their projects.

Acoustics


Built on Its TRU® Technology, Attune offers multiple acoustic benefits to patients and staff in healing environments by reducing in-room sound.

Patient Benefits

- > Easier to fall asleep and stay asleep
- > Helps calm the cardiovascular system
- > Supports healing with a soothing environment

Staff Benefits

- > Reduces stress symptoms and burnout
- > Increases mental efficiency
- > Improves communication

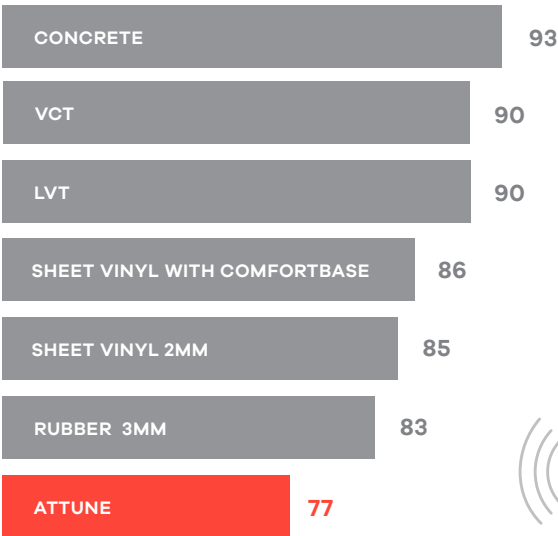



SOUND POWER LEVEL (DBA)

Floor impact sound testing results, ASTM E3133.

Ergonomics

Attune reduces fatigue from standing and walking through a careful calibration of comfort and support. The floor is engineered to absorb just the right amount of footfall impact and create just the right amount of “bounce back” to properly support you as you walk. The result is a true reduction in your experience of joint pain and muscle fatigue.

In addition to acoustic and ergonomic performance, Its TRU® technology’s proprietary fusion-bonding process stands up to heavy rolling loads.

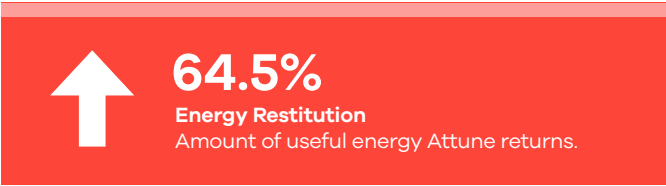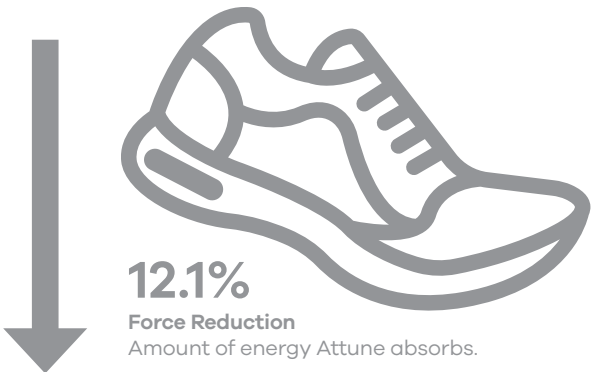

Infection control and providing a sanitary environment in healthcare settings is crucial. That's why we created IdealBase, a 6.25" wall base that extends onto the floor so it can be welded to the floor covering to create a sanitary transition up the wall. IdealBase replaces traditional flash coving, providing cost savings and enhanced performance, all in an aesthetically clean look that complements your room design.

### Installation

- > When installing Idealbase with Attune additional materials are required. The IdealBase will need to be installed over the vulcanized composition rubber backing (SCU-100), which is sold separately. This backing material raises the IdealBase to meet the 7mm height of Attune, creating a seamless transition from flooring to base.
- > Vulcanized composition rubber backing SCU-100 is sold in 5mm- 4' x 30LF rolls.

### Benefits


- > IdealBase installation eliminates dye-lot concerns on corners and provides simpler, more forgiving and faster installation than traditional flash cove methods
- > Specially engineered for use with homogeneous and heterogeneous sheet (.080"), BioSpec Armor® (.100") and rubber sheet (.118").
- > TP construction
- > Scuff and scratch resistant, will not fade or crack
- > Available in 8' lengths for less vertical seams and 10 colors to coordinate with our most popular resilient flooring products

### Sustainability

- > FloorScore Certified; CDPH v1.1 - 2017
- > mindful MATERIALS
- > HPD



[View IdealBase Online](#)

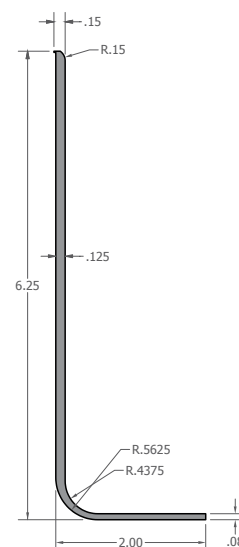

*\*Shown in .080". Also available in .100" and .118"*

Attune Accessories

Style	Code	LRV	Weld Rod	Standard Wall Base	IdealBase®	Standard 2mm Heterogeneous Color Codes
Boardwalk Coconut	ATT-5667R	38.2	842336 Sesame	150 Nougat	401 White	5667R
English Walnut Nut Brown	ATT-5688R	18.8	842478 Herbivore	597 Mocha	527 Clay	5688R
Ironside Oak Graphite	ATT-5704R	29.1	842480 Foundation	208 Light Gray	112 Sandy Tan	5704R
Ironside Oak Linen	ATT-5705R	47.1	842336 Sesame	508 Tweed	30 Beach Sand	5705R
Ironside Oak Muted	ATT-5701R	29.8	842383 Saffron	519 Baja	209 Gray Beige	5701R
Maple Creek Drummond	ATT-5693R	20.3	842418 Medium Beige	503 Ginger	401 White	5693R
Maple Creek Sycamore	ATT-5696R	22.6	842490 Mushroom	508 Tweed	204 Gray	5696R
Maple Grove Cherry	ATT-5625R	12.9	842467 Cinnamon	968 Café	401 White	5625R
Persian Walnut Balsam	ATT-5671R	22.1	842486 Oak Nut	508 Tweed	527 Clay	5671R
Persian Walnut Cypress	ATT-5672R	18.1	842490 Mushroom	503 Ginger	527 Clay	5672R
Southern Oak Antique	ATT-5611R	33.3	842396 Balsa	150 Nougat	244 Off White	5611R
Southern Oak Winchester	ATT-5613R	21.1	842392 Golden Oak	150 Nougat	401 White	5613R
Suber Acorn	ATT-ETW452	16.0	842486 Oak Nut	597 Mocha	527 Clay	ETW452
Suber Bergamot	ATT-ETW454	29.9	842480 Foundation	208 Light Gray	112 Sandy Tan	ETW454
Suber Blue Stem	ATT-ETW458	21.8	842358 Darker Gray	603 Ash	663 Sky Gray	ETW458
Suber Kamala	ATT-ETW455	18.4	842407 Bedrock	190 Jackalope	112 Sandy Tan	ETW455
Suber Lead White	ATT-ETW453	42.5	842472 Ash Gray	208 Light Gray	663 Sky Gray	ETW453
Suber Sedge	ATT-ETW451	33.7	842383 Saffron	118 Dessert Sand	244 Off White	ETW451
Suber Sorrel	ATT-ETW457	33.6	842488 Dock Blue	110 Irish Gray	30 Beach Sand	ETW457
Suber Verdant	ATT-ETW461	30.0	842475 Fairlawn	210 Frosted Jade	244 Off White	ETW461
Wellspring Harvest	ATT-B302	39.3	842336 Sesame	519 Baja	244 Off White	B302
Wellspring Renewal	ATT-B301	44.6	842400 Grassland	150 Nougat	30 Beach Sand	B301
Wellspring Root	ATT-B304	27.2	842460 Lambskin	508 Tweed	527 Clay	B304
Wellspring Seedling	ATT-B308	43.8	842482 Lime Green	246 Khaki Green	168 Bluish White	B308
Wellspring Shade	ATT-B303	27.5	842381 Heather Beige	508 Tweed	112 Sandy Tan	B303
Wellspring Tranquility	ATT-B306	42.8	842333 Sage	170 Bright White	401 White	B306
Wellspring Vida	ATT-B305	42.3	842488 Dock Blue	113 Morning Mist	663 Sky Gray	B305
Wellspring Walkabout	ATT-B307	36.5	842472 Ash Gray	597 Mocha	30 Beach Sand	B307

## Attune

Style	Attune
Construction	7mm Heterogeneous Sheet (Non-ortho phthalate construction)
Classification	ASTM F1303 Type I, Grade 1, Class B
Total Thickness	0.275" (7.0 mm)
Wear Layer Thickness	20mil (0.51 mm)
Wear Layer	Quantum Guard Elite®
Width	5' 10" (1.78 m)
Colors	28
Pattern Repeat	Style Dependent 36" L x 72" W - Boardwalk, English Walnut, Maple Creek, Persian Walnut, Ironside Oak, Suber, Wellspring 48" L x 48" W - Maple Grove, Southern Oak 48" L x 72" W - Antique Oak
Packaging	Roll Size 5'10" x 30 LF (Approximately 175 SF/roll) - 6 rolls per pallet
Weight	1.5lbs/SF (2.04kg/m2)
Adhesive	<b>Porous &amp; Non-porous Substrates:</b> MR-710 Full Spread, Single Component Urethane
QuickStix®	Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.
Seam Method	Heat Weld Only - Mannington Commercial Weld Rods
Testing	
HUD/FHA	Meets / Exceeds
ADAG (American Disability Act Guidelines)	Passes
Static Load (ASTM F970)	Passes - Residual Indent ≤ 0.005"
Static Load (ASTM F970 mod.)	Passes - 500 PSI; Residual Indent ≤ 0.005"
Dynamic Rolling Load (ASTM F2753)	Pass
G-Max ( Clegg)	343 Avg.
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²
Pill Test (ASTM 2859)	Passes
Slip Resistance (ASTM D2047)	Passes - .50
Acoustic (ASTM 3133)	L wa 72 dB
Acoustic IIC (ASTM E492)	66 - 6" Concrete with Drop Ceiling 55 - 6" Concrete
Acoustic STC (ASTM E90)	61 - 6" Concrete with Drop Ceiling 52 - 6" Concrete
Acoustic Δ IIC (E2179)	23 - 6" Concrete
Resistance to Light (ASTM F1515)	Passes - < 8 Delta E Color Change
Chemical Resistance (ASTM F925)	Passes - No More Than Slight Change
Environmental Data	
Recycled Content	60% post-consumer recycled content by total product weight
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017
Product Declarations	EPD, HPD
Carbon Offset	105% Cradle to Gate (A1-A3), visit website for more information
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information
Manufacturing	Salem, NJ (USA)- ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl Verified Silver
Warranty	
	Limited 15-Year Commercial Warranty Limited 15 Year Quantum Guard Elite Wear Warranty

**Note:** Visual/Color variations can occur from roll to roll. This variation does not affect product performance.