



The Discovery Collection

Mannington
COMMERCIAL




Cover: Encounter - Fortuity DC103, Mannington Select Collection Wood Chatham Oak - Alpine MSC140
Above: Unlock - Luck DC202




The Discovery Collection Coordinates

The Discovery Collection was designed to complement a wide range of flooring collections, so you can build an inspired flooring palette for your spaces without sacrificing form for function. Extend the abstract textures of Discovery with patterns from our other resilient sheet collections. Choose LVT in stone or wood visuals for a natural complement. Reinforce or extend your color palette with the perfectly matching solid tones of the Color Anchor Collection, which spans all product types.



1. Color Anchor, Stride, Crumb Cake
2. Mannington Select, Wood, Chandler Oak, Bergen
3. Nature's Paths, Wood, American Walnut, Saddle
4. Color Anchor, Groove, Peanut Shell
5. Poetica, Camus, Wagner
6. Discovery, Encounter, Fortune
7. Vivendi II, Woven, Verdigris
8. Mannington Select, Stone, Argyl Slate, Mineral
9. ColorFields, Mesa
10. Realities II, Maple Grove II, Creek
11. Discovery, Unlock, Fortune



- | | |
|--|--|
| 1. Teles, Misty Bay | 5. Discovery, Reveal, Serendipity |
| 2. Discovery, Encounter, Serendipity | 6. Paper, Creased Paper, Washi |
| 3. Mannington Select, Wood,
Chatham Oak, Harbor | 7. Mannington Select, Stone,
Celestial, Nocturn |
| 4. Raffia, Oyster | |



QUANTUM GUARD®
elite

Success Is in Our Science


Introducing Quantum Guard Elite, the patent-pending technology that provides the complete performance solution for heterogeneous sheet flooring.

- Engineered for ease of cleaning and reduced maintenance costs
- Highest abrasion resistance in the industry
- Advanced stain resistance
- Excellent slip resistance

Cleans Better Than Competitors

Quantum Guard Elite

Leading Competitor

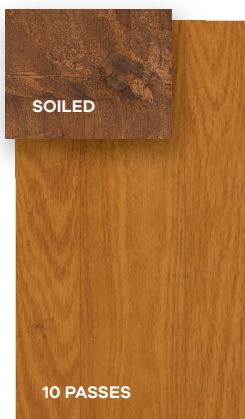

Advanced urethane chemistry and an optimized texture make resilient sheet with Quantum Guard Elite easy to clean. *(Results after 10 passes with a wet microfiber mop on soiled floor.)*

Best-in-Class Abrasion Resistance

Quantum Guard Elite

Leading Competitor




Our proprietary blend of aluminum oxide particles is suspended evenly through the urethane top coat, giving the industry's best abrasion resistance. *(Results after 50 passes with sanding block.)*

Stain Resistance That Endures

Quantum Guard Elite

Leading Competitor



With new protective compounds from the aerospace industry and dentistry, Quantum Guard Elite's stain resistance performs over time at the same high level as the day it was installed. *(Results after 1,000 passes with a sanding block, staining with a blue Sharpie and cleaning with an alcohol wipe.)*

Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

Realities® III Collection

Style

Construction	Heterogeneous Sheet (Non-ortho phthalate construction)
Classification	ASTM F1303 Type I, Grade 1, Class B
Total Thickness	0.080" (2.03 mm)
Wear Layer Thickness	0.020" (0.51 mm)
Wear Layer	Quantum Guard Elite®
Width	6' (1.83 m), 9' (2.75 m), 12' (3.66 m)
Colors	48
Pattern Repeat	36" L x 72" W - Boardwalk, English Walnut, Ironside Oak, Maple Creek, Persian Walnut, Wild Cherry 48" L x 48" W - Maple Grove, Southern Oak 48" L x 72" W - Antique Oak
Packaging	6' - 30-50 yd ² (25.0-41.8 m ²) 9' - 30-75 yd ² (25.0-62.7 m ²) 12' - 30-100 yd ² (25.0-83.6 m ²)
Weight	4.7 lbs/yd ² (2.55 kg/m ²)
Adhesive	Porous & Non-porous Substrates: V-95 Full Spread, 2-part Epoxy MoistureLoc Full Spread, One-Component V-88 Full Spread XpressStep for LVT & Sheet Vinyl Full Coverage Spray Note: Must use V-95, MoistureLoc, QuickStix or XpressStep adhesive under hospital beds and heavy rolling load areas. In more abusive conditions such as areas subject to dragging force, direct sunlight or where topical moisture would be a concern, only V-95, MoistureLoc or QuickStix should be used.
QuickStix®	Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.
Seam Method	Mannington Commercial Weld Rods or MLG-33 Chemical Seam Sealer. Mannington Seam Coater Pen for high traffic areas. Note: Heat welding is the recommended procedure for healthcare and high traffic applications.

Testing

HUD/FHA	Meets / Exceeds
ADAG (American Disability Act Guidelines)	Passes
Flexibility (ASTM F790)	Passes - 1/4" Mandrel - No Crack/Break
Static Load (ASTM F970)	Passes - Residual Indent ≤ 0.005"
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"
Rolling Resistance/Caster Chair (ISO 4918)	25,000 Cycles, No Significant Change
Short Term Residual Indentation (ASTM F1914/F1303)	Passes - Must be ≤ 0.012"
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²
Smoke Density (ASTM E662)	Passes - ≤ 450
Slip Resistance (ASTM C1028, Dry)	Passes - ≥ 0.5 Leather; 0.6 Rubber
Acoustic IIC (ASTM E492)	50 - 6" Concrete with Drop Ceiling
Acoustic STC (ASTM E90)	63 - 6" Concrete with Drop Ceiling
Resistance to Light (ASTM F1515)	Passes - < 8 Delta E Color Change
Chemical Resistance (ASTM F925)	Passes - No More Than Slight Change
Resistance to Heat (ASTM F1514)	Passes - < 8 Delta E Color Change
Resistance to Mold/Mildew (ASTM G21/E2180)	Passes - No More Than Slight Change

Environmental Data

Indoor Air Quality	FloorScore Certified; CDPH v1.1-2010
Product Declarations	EPD, HPD
Carbon Offset	105% (Cradle to Gate (A1-A3); 8.84 kg CO ₂ e/yd ² inclusive of additional 5%)
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information
Manufacturing	Salem, NJ (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl Verified Silver

Warranty

Limited 15-Year Commercial Warranty
Limited 15-Year Quantum Guard Elite® Wear Warranty

Note: Visual/Color variations can occur from roll to roll. This variation does not affect product performance.