



Open Range™ Collection

Mannington®
COMMERCIAL




Cover: Open Range™ - Rogers ROGERS, Cooper COOPER
Above: Open Range™ - Blake BLAKE





Open Range™ - Pitman PITMAN


Crafted to Coordinate

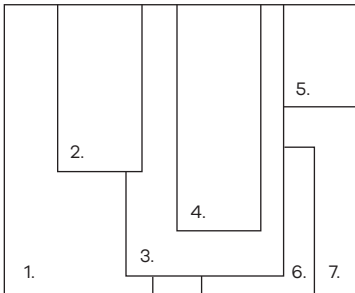

- 1. Spin, Channel, Delta Blues
- 2. Open Range™, Blake
- 3. The Case for Silence, Optic Hush, Suspend
- 4. Open Range™, Pitman
- 5. Amtico Signature®, Abstract, Back to Black Vamp
- 6. BioSpec® Choices® BioSpec MD, New Navy
- 7. Amtico Signature®, Stone, Worn Concrete



Crafted to Coordinate

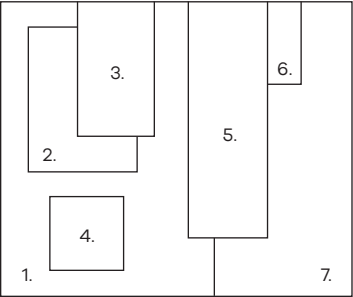

- 1. Swell, Hightide, Uncharted
- 2. BioSpec® Choices, BioSpec® MD, Silver Pine
- 3. Open Range™, Rogers
- 4. ColorScape®, Beach Sand
- 5. Open Range™, Cooper
- 6. Mannington Select, Chandler Oak, Vining
- 7. Natural Elements, Air Too, Sand Dunes



BurkeBase® Premium TS Molded Wall Base – 204 Grey; Intrinsic, Confluence – Security 63014, Optimism 81010

Available Profile Heights	BurkeBase® Premium TS Molded 1/8"	BurkeBase® Type TP 1/8"	BurkeBase® Type TV 1/8"	BurkeBase® Type TV .080"
	4" (102 mm) 6" (152 mm)	2.5" (64 mm) 4" (102 mm) 4.5" (114 mm) 6" (152 mm)	2.5" (64 mm) 4" (102 mm) 4.5" (114 mm) 6" (152 mm)	2.5" (64 mm) 4" (102 mm) 6" (152 mm)
	Coved	Coved or Toeless	Coved or Toeless	Coved or Toeless

Warranty	This product is backed by our Limited 5-Year Commercial Warranty.
Corners	<p>BurkeBase® Premium Type TS factory molded corners are available with 4" and 6" coved corners. Must be ordered at time of wall base order to ensure color match.</p> <p>BurkeBase® Type TP/TV pre-formed corners are available in all profile heights. Must be ordered at time of wall base order to ensure color match.</p>
Custom Colors	<p>Minimums apply.</p> <p>Please make final selection for all colors from actual product samples.</p> <p>For samples and information, visit manningtoncommercial.com or call 800.241.2262.</p>

Durability Meets Design

Our superior recipe with proper curing allows our rubber products to look better and be easier to maintain long-term.

- > Carefully engineered profiles provide better acoustics and greater comfort underfoot
- > Never needs to be waxed, thanks to a proprietary combination of inherent waxes
- > Superior thermoset rubber retains color, resists indentation and crackling, and is quiet underfoot
- > Superior scratch-resistance due to low clay and high pigment content
- > No finish or stripping, lowers maintenance costs
- > Low emission: FloorScore Certified
- > Excellent wear resistance
- > Slip resistant
- > Quiet under wheeled traffic
- > Profile design allows for enhanced cleanability



American Made

At Mannington Commercial, we are very proud to craft all of our resilient sheet, rubber, carpet and more than 90% of our LVT right here in the USA. It means supporting local economies and employing generations of American families. And it means providing you with the industry's most innovative flooring solutions.

Learn more at
manningtoncommercial.com





Design Solutions


Whether you're looking for design support from the start of a project or in the final phase, Mannington's Design Solutions team can help. Our team of designers is here to support you, our customers, through every step of the design process, from concept to installation.

Your Vision Realized

Our team of designers with diverse backgrounds in interior design, graphic design and textile design will work with you to provide solutions, knowledge and options to simplify the design process and bring your vision to life.

Deliverables

- > Product Palettes
- > 2D and 3D Renderings
- > Composites
- > Configurations
- > Finished Plans
- > Rendered Floor Plan
- > Estimates
- > Installation Diagrams
- > Revit Files
- > Construction Documents

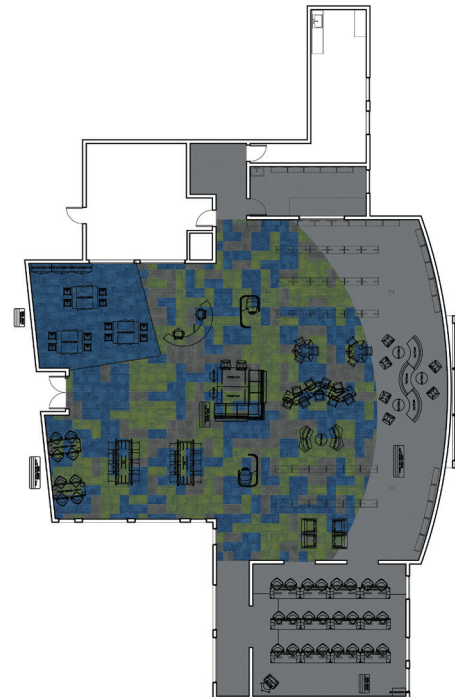

Open Range™

Style	Open Range™
Construction	Thermoset Rubber Plank
Finish	Matte
Classification	ASTM F1344 Class I, Type A
Total Thickness	1/8" (3.2 mm)
Profile	Marbled
Size	6.25" x 42" (165.10 x 1066.80 mm)
Colors	12
Packaging	20 pc, 36.5 ft² (3.39 m²), 40 lbs (18.15 kg)
Adhesive	Mannington MR-721 Epoxy, Mannington MR-725 Polyurethane, Mannington MR-911 One Part Acrylic Adhesive for above grade stairwell applications Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.
QuickStix®	
Note: Must use MR-721, MR-725 or QuickStix adhesive under hospital beds and heavy rolling load areas. Use MR-721, MR-725 or Quickstix in Operating rooms or where higher risk of topical moisture would be a concern.	
Testing	
HUD/FHA	Meets/Exceeds
ADAG (American Disability Act Guidelines)	Passes
Dimensional Stability (ASTM F2199)	Passes - Max 0.15%
Squareness (ASTM F540)	Passes - Max 0.010"
Hardness (ASTM D2240)	Passes - Shore Type A ≥ 85
Static Load (ASTM F970)	Passes - Residual Indent ≤ 0.005"
Static Load (ASTM F970 mod.)	Passes - 800 PSI; Residual Indent ≤ 0.005"
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm²
Smoke Density (ASTM E662)	Passes - ≤ 450
Slip Resistance (ASTM C1028, Dry)	Passes - ≥ 0.5 Leather; 0.6 Rubber
Acoustic IIC (ASTM E492)	50 - 6" Concrete with Drop Ceiling
Chemical Resistance (ASTM F925)	Passes - No More Than Slight Change
Resistance to Heat (ASTM F1514)	Passes - < 8 Delta E Color Change
Resistance to Mold/Mildew (ASTM G21/E2180)	Passes - No More Than Slight Change
Environmental Data	
Recycled Content	Contains 4% rapidly renewable resource content by total product weight.
Indoor Air Quality	FloorScore Certified; CDPH v1.1-2010
Product Declarations	EPD, HPD, Declare Red List Free
Carbon Offset	Carbon Offset 105% (Cradle to Gate (A1-A3); 13.70kg CO2e/yd²)
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information
mindful MATERIALS	
Manufacturing	Calhoun, GA (USA)
Warranty	
	Limited 10-Year Commercial Warranty Limited 10-Year Wear Warranty