

R | Anew 5.0 PRODUCT SPECIFICATIONS



COLLECTION	Anew
STYLE NUMBER	I543V
CONSTRUCTION	Heavy Commercial Luxury Vinyl Tile
WEAR LAYER THICKNESS	20 mil / 0.02 inches (0.508 mm)
OVERALL THICKNESS	0.197 inches (5 mm)
EDGE PROFILE	Squared Edge
REFERENCE SPECIFICATION	ASTM F1700 Class III printed film vinyl plank Type B (embossed)
FINISH	ExoGuard+®
INSTALLATION TYPE	Dry Back
INSTALLATION	Glue Down
RECOMMENDED ADHESIVE	4200 (4 gal), 2200 (4 gal), 4252 (4 gal) or S150

Packaging

PLANK SIZE
PIECES /BOX
AREA /BOX
WEIGHT /BOX

US Units

7.75 inches W x 48 inches L
11
28.38 sq ft
48.4 lbs

Metric Units

19.7 cm W x 121.9 cm L
2.6 sq m
22 kg

Performance Testing

STATIC LOAD / ASTM F970
RESIDUAL INDENTATION / ASTM F1914
RESISTANCE TO CHEMICALS / ASTM F925
RADIANT PANEL / ASTM E648
COEFFICIENT OF FRICTION (ASTM D2047, SLIP RESISTANCE)

Passes
Passes
Passes
Passes, Class I
>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranty


[15 Year Commercial Limited.](#)

[Commercial Limited Underbed Bond Warranty S150/Lokworx+ Resilient.](#)

Please visit patcraft.com for the most current warranty information.

R | Anew 5.0

Installation Methods

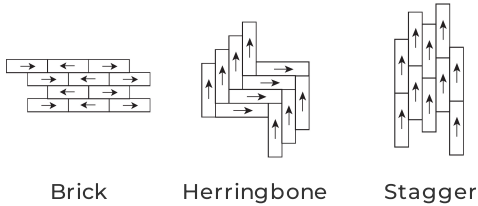

Brick

Herringbone

Stagger

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Environmental Specifications

EMBODIED CARBON (CRADLE TO GATE)

9.59 kg CO₂/m²

Materials

RECYCLED CONTENT

Pre-consumer - 30%

Third Party Certifications

HEALTH PRODUCT DECLARATION (HPD)

[1000 ppm Disclosure](#)

ENVIRONMENTAL PRODUCT DECLARATION (EPD)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

ENVIRONMENTAL GUARANTEE

The products in this collection are In The Loop – they are fully recyclable through our re[TURN]® Reclamation Program. We will facilitate the pick-up and free return of a minimum of 100 SY of EcoWorx®, 500 SY of ReWorx™ products or 5,000 SF of Shaw-manufactured resilient products to be recycled. Participating in re[TURN]® lowers carbon emissions of these products by reducing virgin materials needed for making new products.

[Certified](#)

FLOORSCORE®

Available Colorways




IVORY-V2 00110
V2 - SLIGHT VARIATION



RAW-V2 00130



TALC-V2 00505



TUSK-V3 00510



MISTRAL-V2 00520



GALENA-V3 00540


R | Anew 5.0



SLATE-V2 00550



BASALT-V3 00580



VICUNA-V2 00700




AMARETTO-V3 00740



PRALINE-V2 00750




SABLE-V2 00760



COPPER-V2 00770



TRUFFLE-V2 00780



CHESTNUT-V2 00790

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

