



R | Earthen 20mil PRODUCT SPECIFICATIONS



COLLECTION	Earthen
STYLE NUMBER	1676V
CONSTRUCTION	Heavy Commercial Luxury Vinyl Tile
WEAR LAYER THICKNESS	20 mil / 0.02 inches (0.508 mm)
OVERALL THICKNESS	0.098 inches (2.5 mm)
EDGE PROFILE	Squared Edge
FINISH	ExoGuard®
INSTALLATION TYPE	Dry Back
INSTALLATION	Glue Down
RECOMMENDED ADHESIVE	4200 (4 gal), 2200 (4 gal), 4252 (4 gal) or S150

Packaging

PLANK SIZE
PIECES /BOX
AREA /BOX
WEIGHT /BOX

US Units
 12 inches W x 24 inches L
 14
 28 sq ft
 27.4 lbs

Metric Units
 30.5 cm W x 61 cm L

 2.6 sq m
 12.4 kg

Performance Testing

STATIC LOAD / ASTM F970	Passes (Modified), *1500 lbs
RESIDUAL INDENTATION / ASTM F1914	Passes
RESISTANCE TO CHEMICALS / ASTM F925	Passes
RADIANT PANEL / ASTM E648	Passes, Class I

*Results are based on a laboratory test and used for comparative purposes. Real life load limit may vary.
 Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranty


15 Year Commercial Limited.
 Commercial Limited Underbed Bond Warranty S150/Lokworx+ Resilient.

Please visit patcraft.com for the most current warranty information.



R | Earthen 20mil

Installation Methods

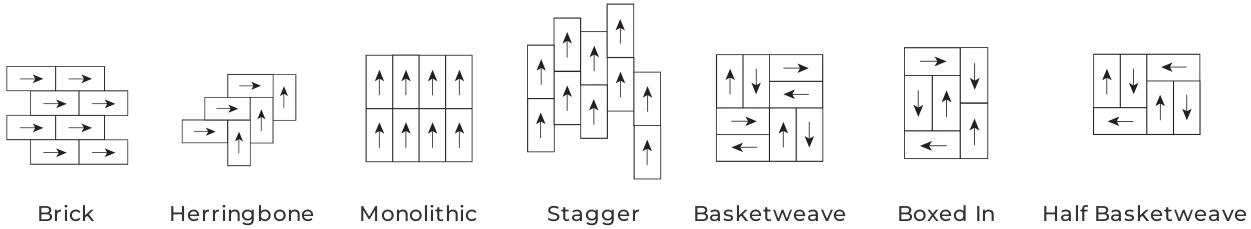

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Environmental Specifications

EMBODIED CARBON (CRADLE TO GATE) 7.04 kg CO₂/m²

Third Party Certifications

HEALTH PRODUCT DECLARATION (HPD) [1000 ppm Disclosure](#)
ENVIRONMENTAL PRODUCT DECLARATION (EPD) [3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)
FLOORSCORE® [Certified](#)

Available Colorways



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

