



R | Pursue

PRODUCT SPECIFICATIONS



COLLECTION	Within
STYLE NUMBER	I633V
CONSTRUCTION	Heavy Commercial Luxury Vinyl Tile
WEAR LAYER THICKNESS	20 mil / 0.02 inches (0.508 mm)
OVERALL THICKNESS	0.098 inches (2.5 mm)
EDGE PROFILE	Squared Edge
FINISH	ExoGuard®
INSTALLATION TYPE	Dry Back
INSTALLATION	Glue Down
RECOMMENDED ADHESIVE	4200 (4 gal), 2200 (4 gal), 4252 (4 gal) or S150 SPRAY ADHS
INSTALLATION STATEMENT(S)	To minimize visual variation, install coordinating sheet and plank perpendicular to one another.

Packaging

PLANK SIZE
PIECES /BOX
AREA /BOX
WEIGHT /BOX

US Units

7.09 inches W x 47.24 inches L
18
41.85 sq ft
37.96 lbs

Metric Units

18 cm W x 120 cm L

3.9 sq m
17.2 kg

Performance Testing

STATIC LOAD / ASTM F970
RESIDUAL INDENTATION / ASTM F1914
RESISTANCE TO CHEMICALS / ASTM F925
RADIANT PANEL / ASTM E648
COEFFICIENT OF FRICTION (ASTM D2047, SLIP RESISTANCE)

Passes (Modified), *1500 lbs
Passes
Passes
Passes, Class I
≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

*Results are based on a laboratory test and used for comparative purposes. Real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranty

15 Year Commercial Limited.


Commercial Limited Underbed Bond Warranty S150/Lokworx+ Resilient.

Please visit patcraft.com for the most current warranty information.



R | Pursue

Installation Methods

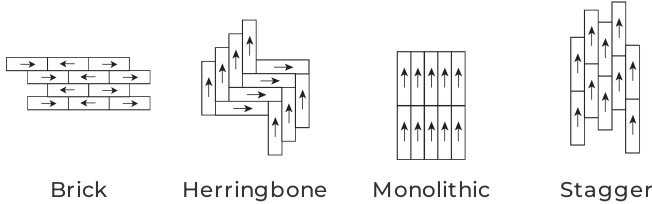

Brick

Herringbone

Monolithic

Stagger

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Environmental Specifications

EMBODIED CARBON (CRADLE TO GATE)

6.05 kg CO₂/m²

Third Party Certifications

HEALTH PRODUCT DECLARATION (HPD)

[1000 ppm Disclosure](#)

ENVIRONMENTAL PRODUCT DECLARATION (EPD)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

FLOORSCORE®

[Certified](#)

Available Colorways



AUTHENTIC-V2 00120
V2 - SLIGHT VARIATION



NATURAL-V2 00130
V2 - SLIGHT VARIATION




STERLING-V2 00530
V2 - SLIGHT VARIATION



RESTFUL-V2 00720
V2 - SLIGHT VARIATION




CALM-V2 00730
V2 - SLIGHT VARIATION




WARMTH-V2 00740
V2 - SLIGHT VARIATION



MINDFUL-V2 00770
V2 - SLIGHT VARIATION



MELLOW-V2 00780
V2 - SLIGHT VARIATION



AURA-V2 00790
V2 - SLIGHT VARIATION

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

