

R | Reach

PRODUCT SPECIFICATIONS

COLLECTION	Create In Place	
STYLE NUMBER	I601V	
CONSTRUCTION	Heavy Commercial Luxury Vinyl Tile with Fiberglass	
	US Units	Metric Units
WEAR LAYER THICKNESS	20 mil / 0.02 inches	0.508 mm
OVERALL THICKNESS	0.197 inches	5 mm
EDGE PROFILE	Squared Edge	
FINISH	ExoGuard+®	
INSTALLATION TYPE	Dry Back	
INSTALLATION	Glue Down	
RECOMMENDED ADHESIVE	4200 (4 gal), 2200 (4 gal), 4252 (4 gal) or S150 SPRAY ADHS	

Packaging

PLANK SIZE	9 inches W x 36 inches L	22.9 cm W x 91.4 cm L
PIECES /BOX	10	
AREA /BOX	22.5 sq ft	2.1 sq m
WEIGHT /BOX	36.6 lbs	16.6 kg

Performance Testing

STATIC LOAD / ASTM F970	Passes (Modified), *1000 lbs
RESISTANCE TO CHEMICALS / ASTM F925	Passes
RADIANT PANEL / ASTM E648	Passes, Class I
COEFFICIENT OF FRICTION (ASTM D2047, SLIP RESISTANCE)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

*Results are based on a laboratory test and used for comparative purposes. Real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.


Warranty

15 Year Commercial Limited.

Commercial Limited Underbed Bond Warranty S150/Lokworx+ Resilient.

Please visit patcraft.com for the most current warranty information.

Installation Methods

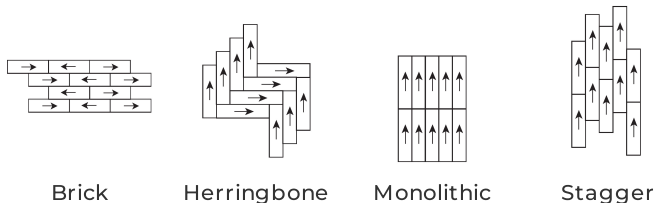

[Installation Guidelines](#)

[Maintenance Guidelines](#)

R | Reach

Environmental Specifications

EMBODIED CARBON (CRADLE TO GATE)

14.9 kg CO₂/m²

Third Party Certifications

HEALTH PRODUCT DECLARATION (HPD)

1000 ppm Disclosure

ENVIRONMENTAL PRODUCT DECLARATION (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FLOORSCORE®

Certified


Available Colorways



ADAPT-V1 00350
V1 - UNIFORM
APPEARANCE



CHANGE-V1 00385
V1 - UNIFORM
APPEARANCE



INTEGRATE-V1 00400
V1 - UNIFORM
APPEARANCE



EXPLORE-V1 00485
V1 - UNIFORM
APPEARANCE



GATHER-V1 00500
V1 - UNIFORM
APPEARANCE



CONNECT-V1 00530
V1 - UNIFORM
APPEARANCE



REFINE-V1 00585
V1 - UNIFORM
APPEARANCE



SCOPE-V1 00650
V1 - UNIFORM
APPEARANCE



INTENTION-V1 00700
V1 - UNIFORM
APPEARANCE



SHIFT-V1 00900
V1 - UNIFORM
APPEARANCE

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

