

R | Timber Grove II 12 mil

PRODUCT SPECIFICATIONS



COLLECTION	Timber Grove II
STYLE NUMBER	I420V
CONSTRUCTION	Light Commercial Luxury Vinyl Tile
WEAR LAYER THICKNESS	12 mil / 0.012 inches (0.305 mm)
OVERALL THICKNESS	0.098 inches (2.5 mm)
EDGE PROFILE	Squared Edge
REFERENCE SPECIFICATION	ASTM F1700 Class III printed film vinyl plank Type B (embossed)
FINISH	ExoGuard+®
INSTALLATION TYPE	Dry Back
INSTALLATION	Glue Down
RECOMMENDED ADHESIVE	4200 (4 gal), 2200 (4 gal), 4252 (4 gal) or S150 SPRAY ADHS

Packaging

PLANK SIZE
PIECES /BOX
AREA /BOX
WEIGHT /BOX

US Units

5.96 inches W x 48 inches L
21
41.72 sq ft
36 lbs

Metric Units

15.1 cm W x 121.9 cm L

3.9 sq m
16.3 kg

Performance Testing

STATIC LOAD / ASTM F970
RESIDUAL INDENTATION / ASTM F1914
RESISTANCE TO CHEMICALS / ASTM F925
RADIANT PANEL / ASTM E648
COEFFICIENT OF FRICTION (ASTM D2047, SLIP RESISTANCE)

Passes (Modified), *1500 lbs

[Passes](#)

[Passes](#)

[Passes, Class I](#)

[>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes](#)

*Results are based on a laboratory test and used for comparative purposes. Real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.


Warranty

[7 Year Commercial Limited.](#)

Please visit [patcraft.com](https://www.patcraft.com) for the most current warranty information.

R | Timber Grove II 12 mil

Installation Methods

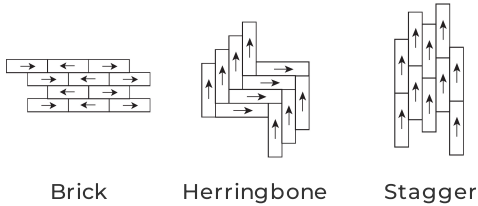

Brick

Herringbone

Stagger

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Environmental Specifications

EMBODIED CARBON (CRADLE TO GATE)

9.59 kg CO₂/m²

Materials

RECYCLED CONTENT

Pre-consumer - 30%

Third Party Certifications

HEALTH PRODUCT DECLARATION (HPD)

[1000 ppm Disclosure](#)

ENVIRONMENTAL PRODUCT DECLARATION (EPD)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)


ENVIRONMENTAL GUARANTEE

The products in this collection are In The Loop – they are fully recyclable through our re[TURN]® Reclamation Program. We will facilitate the pick-up and free return of a minimum of 100 SY of EcoWorx®, 500 SY of ReWorx™ products or 5,000 SF of Shaw-manufactured resilient products to be recycled. Participating in re[TURN]® lowers carbon emissions of these products by reducing virgin materials needed for making new products.

FLOORSORE®

[Certified](#)

Available Colorways



ASTER-V4 00170
V4 - SUBSTANTIAL
VARIATION



SPROUT-V2 00173
V2 - SLIGHT VARIATION



HEATHER-V3 00174
V3 - MODERATE
VARIATION



JUNIPER-V2 00559
V2 - SLIGHT VARIATION



HEDGEROW-V2 00564
V2 - SLIGHT VARIATION



MOORELAND-V4 00568
V4 - SUBSTANTIAL
VARIATION

R | Timber Grove II 12 mil



HEMLOCK-V2 00572
V2 - SLIGHT VARIATION



LAUREL-V2 00684
V2 - SLIGHT VARIATION



FRONTIER-V2 00774
V2 - SLIGHT VARIATION



BOXWOOD-V2 00775
V2 - SLIGHT VARIATION



SHADY GROVE-V3 05012
V3 - MODERATE VARIATION



YARROW-V2 05013
V2 - SLIGHT VARIATION



INKBERRY-V3 05016
V3 - MODERATE VARIATION



PAVILLION-V4 05019
V4 - SUBSTANTIAL VARIATION



PERGOLA-V3 07003
V3 - MODERATE VARIATION



TOPIARY-V3 07004
V3 - MODERATE VARIATION



COURTYARD-V3 07005
V3 - MODERATE VARIATION



TRELLIS-V3 07007
V3 - MODERATE VARIATION



LATTICE-V2 07008
V2 - SLIGHT VARIATION

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

