

# R | Timber Grove II 12 mil

## PRODUCT SPECIFICATIONS



<b>COLLECTION</b>	Timber Grove II
<b>STYLE NUMBER</b>	I420V
<b>CONSTRUCTION</b>	Light Commercial Luxury Vinyl Tile
<b>WEAR LAYER THICKNESS</b>	12 mil / 0.012 inches (0.305 mm)
<b>OVERALL THICKNESS</b>	0.098 inches (2.5 mm)
<b>EDGE PROFILE</b>	Squared Edge
<b>REFERENCE SPECIFICATION</b>	ASTM F1700 Class III printed film vinyl plank Type B (embossed)
<b>FINISH</b>	ExoGuard+®
<b>INSTALLATION TYPE</b>	Dry Back
<b>INSTALLATION</b>	Glue Down
<b>RECOMMENDED ADHESIVE</b>	4200 (4 gal), 2200 (4 gal), 4252 (4 gal) or S150 SPRAY ADHS

## Packaging

	US Units	Metric Units
<b>PLANK SIZE</b>	5.96 inches W x 48 inches L	15.1 cm W x 121.9 cm L
<b>PIECES /BOX</b>	21	
<b>AREA /BOX</b>	41.72 sq ft	3.9 sq m
<b>WEIGHT /BOX</b>	36 lbs	16.3 kg

## Performance Testing

<b>STATIC LOAD / ASTM F970</b>	Passes (Modified), *1500 lbs
<b>RESIDUAL INDENTATION / ASTM F1914</b>	Passes
<b>RESISTANCE TO CHEMICALS / ASTM F925</b>	Passes
<b>RADIANT PANEL / ASTM E648</b>	Passes, Class I
<b>COEFFICIENT OF FRICTION (ASTM D2047, SLIP RESISTANCE)</b>	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

\*Results are based on a laboratory test and used for comparative purposes. Real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.


## Warranty

7 Year Commercial Limited.

Please visit [patcraft.com](https://patcraft.com) for the most current warranty information.

# R | Timber Grove II 12 mil

## Installation Methods

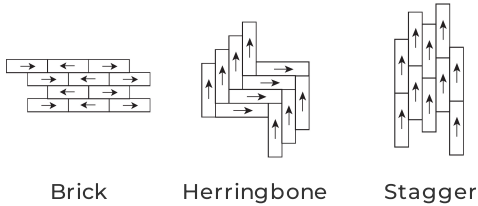

Brick

Herringbone

Stagger

[Installation Guidelines](#)

[Maintenance Guidelines](#)

## Environmental Specifications

**EMBODIED CARBON (CRADLE TO GATE)**

9.59 kg CO<sub>2</sub>/m<sup>2</sup>

## Materials

**RECYCLED CONTENT**

Pre-consumer - 30%

## Third Party Certifications

**HEALTH PRODUCT DECLARATION (HPD)**

[1000 ppm Disclosure](#)

**ENVIRONMENTAL PRODUCT DECLARATION (EPD)**

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

**ENVIRONMENTAL GUARANTEE**

The products in this collection are In The Loop – they are fully recyclable through our re[TURN]® Reclamation Program. We will facilitate the pick-up and free return of a minimum of 100 SY of EcoWorx®, 500 SY of ReWorx™ products or 5,000 SF of Shaw-manufactured resilient products to be recycled. Participating in re[TURN]® lowers carbon emissions of these products by reducing virgin materials needed for making new products.

[Certified](#)

**FLOORSORE®**

## Available Colorways



ASTER-V4 00170  
V4 - SUBSTANTIAL  
VARIATION



SPROUT-V2 00173  
V2 - SLIGHT VARIATION



HEATHER-V3 00174  
V3 - MODERATE  
VARIATION



JUNIPER-V2 00559  
V2 - SLIGHT VARIATION



HEDGEROW-V2 00564  
V2 - SLIGHT VARIATION



MOORELAND-V4 00568  
V4 - SUBSTANTIAL  
VARIATION

# R | Timber Grove II 12 mil



HEMLOCK-V2 00572  
V2 - SLIGHT VARIATION



LAUREL-V2 00684  
V2 - SLIGHT VARIATION



FRONTIER-V2 00774  
V2 - SLIGHT VARIATION



BOXWOOD-V2 00775  
V2 - SLIGHT VARIATION



SHADY GROVE-V3 05012  
V3 - MODERATE VARIATION



YARROW-V2 05013  
V2 - SLIGHT VARIATION



INKBERRY-V3 05016  
V3 - MODERATE VARIATION



PAVILLION-V4 05019  
V4 - SUBSTANTIAL VARIATION



PERGOLA-V3 07003  
V3 - MODERATE VARIATION



TOPIARY-V3 07004  
V3 - MODERATE VARIATION



COURTYARD-V3 07005  
V3 - MODERATE VARIATION



TRELLIS-V3 07007  
V3 - MODERATE VARIATION



LATTICE-V2 07008  
V2 - SLIGHT VARIATION

## Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

