

### **CODE NUMBER**

3250397

### **DESCRIPTION**

1.6 gpf, Rough Brass Finish, Fixture Connection , Single Flush, Battery, Piezo, Sloan® Concealed Solenoid (less sensor) Water Closet PWT Flushometer.

### **DETAILS**

• Flush Volume: 1.6 gpf (6.0 Lpf)

Finish: Rough BrassPower Type: BatteryValve: Diaphragm

• Valve Body Material: Semi-red Brass

Fixture Type: Water ClosetTouch Button: LED (LED)

### **FEATURES**

- Sloan® Prison Flushometers feature all the performance benefits of standard concealed, diaphragm model Flushometers with added durability to withstand rough environments
- 1.6 gpf flush volum to match with existing fixtures and meet waterefficiency goals
- Choose from Flushometers intended for use with stainless-steel water closet fixtures from Acorn®, Bradley®, Metcraft® and other manufacturers
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Vandal-proof, push-button operation designed with non-hold-open feature to keep fixture from surpassing intended water consumption
- Adjustable tailpiece accommodates various installation height
- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- Battery powered
- Programmed for 3 activation in 15 minutes, 60 minutes lockout;
  Program is field changeable to 15, 30, 45 minute lockouts and dorm option



### **COMPLIANCES & CERTIFICATIONS**







(BAA Compliant, BABAA Compliant, cUPC Certified)

### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

# **VALVE OPERATING PRESSURE (FLOWING)**

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

# **DOWNLOADS**

- 8603-ESM Installation Instructions
- 8603-ESM Maintenance Guide
- Additional Downloads

# NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the 8603-ESM product? View the general spec sheet with all options.


# WARRANTY

View Warranty Information

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



### **ROUGH-IN**

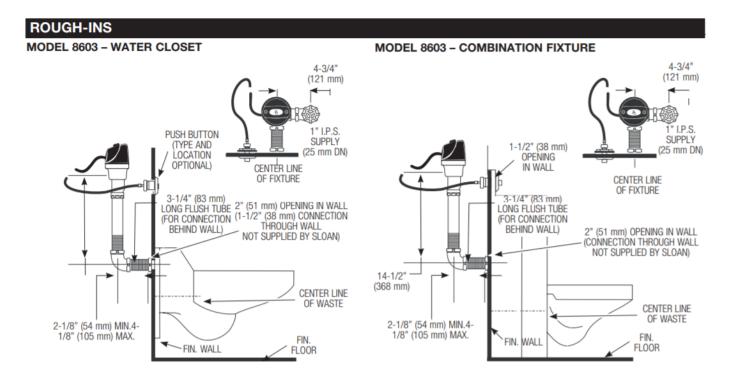

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com