










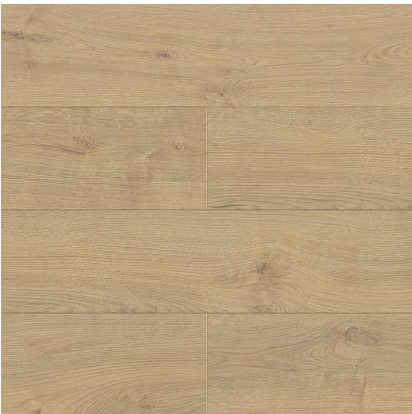




Model: AC4 NATURAL 1L MICHIGAN CLEAR
Codes: 100156391
Group: G-207
Format: 7 153/256"X50 121/256" approx.



COMPOSITION				
		Size	Material	Type of material
	Layer 1	0.2	Melamine	Aminoplastic thermosetting resins
	Layer 2	0.2	Decorative paper	
	Layer 3	7.5	HDF	High-density Fiber Board and water-repellent glues
	Layer 4	0.1	Backside	Sheets of kraft paper impregnated with phenolic resins

CERTIFICATIONS		
Carb certification	CARB: Phase II compliant	

FEATURES	
 Imitates the surface of wood	 Beveled cut on all 4 edges of the board for emphasizing size
 Gloss-free	 Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
 20 20 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.	 5 5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
 Format where only one board has been used to finish the entire base surface	 Is suitable for installing on water radiant heating
 Floor capable of dissipating excess electrical charges and distribute them over its entire surface	 PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
It is one of the easiest to install and safest systems in the market. We just need to adjust the board to be installed longitudinally to the one already placed, by applying a soft pressure without the need for any type of tool. Both pieces will fit and will be secured thanks to the safety tab. It is just as simple to take apart, which makes for a quick disassembly	
 32. General commercial	 23. Intensive residential

DIMENSIONAL FEATURES		
Item thickness	±0.1 MM	EN 13329*
Length of face	±0.5 MM	EN 13329*
Width of face	±0.1 MM	EN 13329*



LABORATORY TESTS		
Resistance to abrasion	AC4	EN 13329*
Impact resistance	IC2	EN 13329*
Resistance to staining	Grade≥4	EN 438-2*
Swelling in thickness	≤12%	EN 13329*
Resistance to microscratching	Class 1	EN 16094*
Formaldehyde emissions	≤0.05 ppm (E1)	EN 717-1*
Slip resistance (pendulum-wet)	CL 1 (29)	EN 16165 Anexo C*
Fire resistance	Cfl-s1	EN 13501*
Evaluation of propensity to accumulation of electrostatic charges	≤2 kV	EN 1815*
Heat resistance	0.065 m2 K/W	
Thermal conductivity	0.123 W/M*K	
Acoustic insulation	IIC=45dB ; STC=45 dB	ASTM E492 ; ASTM E90*
Slip resistance (dcof)	0.60	ANSI A137.1*
Critical radiant flux	Clase 1	ASTM E 648*
Density of the board	901 kg/m3 - 7,21 kg/m2	
Slip resistance (pendulum-dry)	42	EN 16165 Anexo C*

PACKING		
Sales units per box	21.31 SQF/CS	
Sales units per pallet	1107.92 SQF/PAL	
Sales units per unit	2.66 SQF/ST	
Sale unit	M2	
Base unit	ST	
Sales units per square meter	1 M2	
Net weight	188.46 LB/SQF	
Gross weight	193.54 LB/SQF	

SPECIAL PIECES									
SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100173949	IGUALACION NATURAL 1L MICHIGAN CLEAR 270	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.77 KG/PIECES	0.8 KG/PIECES
100176762	MAMPERLAN AC4 NATURAL 1L MICHIGAN CLEAR	G-163	2 PIECES/BOX	200 PIECES/PAL	11.9 PIECES/M2	-	-	1.58 KG/PIECES	1.64 KG/PIECES
100173981	TRANSICION NATURAL 1L MICHIGAN CLEAR 270	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.77 KG/PIECES	0.8 KG/PIECES
100156444	ZOCALO NATURAL MICHIGAN CLEAR 8X220X1,5	G-107	14 PIECES/BOX	560 PIECES/PAL	5.68 PIECES/M2	-	-	1.8 KG/PIECES	1.86 KG/PIECES

