

# ShawContract®

## Branching Out 5mm Acoustic


Collection	<b>Branching Out</b>	
Style Number	<b>4256V</b>	
Construction	<b>Unit / Guestroom Luxury Vinyl Tile With Acoustic Backing</b>	
Attached Underlayment	<b>Pad</b>	
Finish	<b>ExoGuard®</b>	
	U.S.	Metric
Nominal Dimensions	<b>6 in w x 48 in l</b>	<b>15 cm w x 122 cm l</b>
Actual Dimensions	<b>6.00 in w x 48.00 in l</b>	<b>15.24 cm w x 121.92 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.197 in</b>	<b>5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Approved Spaces	<b>Units/Guestrooms Only</b>	
Recommended Adhesive	<b>S150-95, 4200 1 Gallon, 4200 4 Gallon, 2200 4 Gallon, 2200 1 Gallon or 4151</b>	



### Packaging

Pieces per Carton	<b>10 pcs</b>	
Area per Carton	<b>20 sq ft</b>	<b>1.86 sq m</b>
Weight per Carton	<b>27.12 lbs</b>	<b>12.3 kg</b>

### Recommended Installation Method

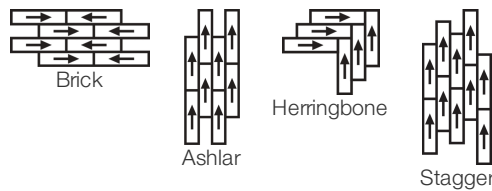

### Coordinating Products

LVT: Branching Out 5.0 Mm  
 COREtec: Branching Out Coretec 12 Mil, Branching Out Coretec 20 Mil

### Performance + Testing

Resistance to Heat (ASTM F1514)	<b>Passes</b>
Resistance to Light (ASTM F1515)	<b>Passes</b>
Resistance to Chemicals (ASTM F925)	<b>Passes</b>
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

[15 Year Light Commercial Limited Warranty](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health & Environmental Certifications

### Health & Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certified

### Climate Impact

Environmental Product Declaration (EPD)  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
11.59 Kg CO<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

### Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization

**Absence of Heavy Metals**

X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

**Absence of Halogenated Flame Retardants**

X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

**Ortho-Phthalates**

X11 Long Term Emissions Control  
Part 2: Flooring Optimization

**FloorScore Certified**

X14 Material Transparency  
Part 1: Promote Ingredient Disclosure Optimization

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**FloorScore Certified**

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Alpine Oak 56100  
V3 - Moderate Variation



Zion Oak 56103  
V2 - Slight Variation



Rise Oak 56120  
V3 - Moderate Variation




Riverside Oak 56140  
V2 - Slight Variation



Prairie Oak 56240  
V3 - Moderate Variation



Plains Oak 56250  
V3 - Moderate Variation




Ridgeline Oak 56504  
V3 - Moderate Variation



Range Oak 56506  
V2 - Slight Variation



Smoky Oak 56516  
V3 - Moderate Variation



Forest Walnut 56703  
V2 - Slight Variation



Pinecone Oak 56720  
V3 - Moderate Variation



Ravine Oak 56730  
V2 - Slight Variation



Traverse Oak 56760  
V3 - Moderate Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

