

Inspire

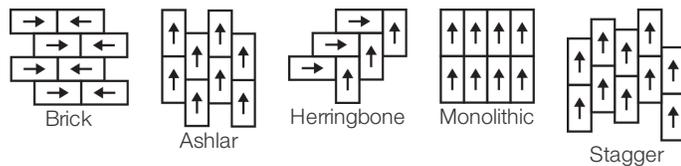
Collection	Mindful Play	
Style Number	0884V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	12 in w x 24 in l	30 cm w x 61 cm l
Actual Dimensions	12.00 in w x 24.00 in l	30.48 cm w x 60.96 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95, 4200 1 Gallon, 4200 4 Gallon, 2200 4 Gallon, 2200 1 Gallon, 4252 (No Heavy Rolling or Static Loads) or 4151	



Packaging

Pieces per Carton	18 pcs	
Area per Carton	36 sq ft	3.34 sq m
Weight per Carton	32.4 lbs	14.7 kg

Recommended Installation Method



Coordinating Products

LVT: Inspire 5.0 Mm

Carpet Tile: Think Tile, Engage Tile, Impact Tile

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *2000 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- [Commercial 15 Year Underbed Bond Warranty](#)
- [15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

- Material Ingredient Transparency
- Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certified

Climate Impact

- Environmental Product Declaration (EPD)
- Embodied Carbon (Cradle to Gate)
- Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
9.59 Kg CO₂/M²
30% (Pre-Consumer 30% | Post-Consumer 0%)

Global Product Assessment

Re[turn] Reclamation Program* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.
CE Marking (EN 14041) | 3rd Party Certified
Country of Origin | United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control
Part 2: Flooring Optimization

X14 Material Transparency
Part 1: Promote Ingredient Disclosure Optimization

Absence of Asbestos

Absence of Heavy Metals

Absence of Halogenated Flame Retardants

Ortho-Phthalates

FloorScore Certified

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 1000 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)




[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Clarity 84111 LRV 25.2 L* 57.27 V4 - Substantial Variation	Lime 84325 LRV 34.9 L* 65.68 V4 - Substantial Variation	Teal 84405 LRV 9.1 L* 36.14 V4 - Substantial Variation	Blue 84429 LRV 8.1 L* 34.22 V4 - Substantial Variation	Escape 84505 LRV 6.9 L* 31.63 V4 - Substantial Variation	Nuance 84515 LRV 24.4 L* 56.52 V4 - Substantial Variation
					
Encourage 84535 LRV 24.2 L* 56.33 V4 - Substantial Variation	Transform 84585 LRV 13.6 L* 43.68 V4 - Substantial Variation	Experience 84595 LRV 11 L* 39.6 V4 - Substantial Variation	Orange 84668 LRV 14.3 L* 44.65 V4 - Substantial Variation	Achieve 84760 LRV 9.9 L* 37.71 V4 - Substantial Variation	Purple 84965 LRV 6.9 L* 31.61 V4 - Substantial Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

