

## Observe


Collection	<b>Art + Science</b>	
Style Number	<b>4566V</b>	
Construction	<b>Heavy Commercial Pvc-Free Ecoworx Resilient</b>	
Finish	<b>ExoGuard+®</b>	
	U.S.	Metric
Nominal Dimensions	<b>8 in w x 51 in l</b>	<b>21 cm w x 129 cm l</b>
Actual Dimensions	<b>8.27 in w x 50.79 in l</b>	<b>21.01 cm w x 129.01 cm l</b>
Overall Thickness	<b>0.098 in</b>	<b>2.5 mm</b>
Edge Profile	<b>Micro-Bevel</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>4200 1 Gallon or 4200 4 Gallon</b>	



### Packaging

Pieces per Carton	<b>16 pcs</b>	
Area per Carton	<b>46.65 sq ft</b>	<b>4.33 sq m</b>
Weight per Carton	<b>36.43 lbs</b>	<b>16.52 kg</b>

### Recommended Installation Method

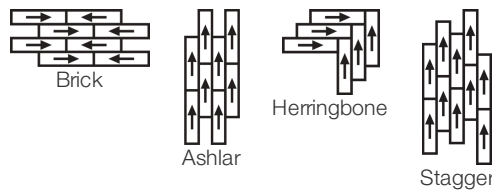

### Coordinating Products

PVC-Free: Pivot, Experiment

## Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *2500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	<b>Passes</b>	
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Smoke Density (ASTM E662, Flaming Mode)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

- [1 Year Commercial Limited Warranty](#)
- [25 Year Commercial System Warranty](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health & Environmental Certifications

### Health & Wellbeing

Material Ingredient Transparency	Greenhealth Approved   Yes Health Product Declaration (HPD)   1000 ppm Disclosure Declare   LBC Compliant
Indoor Air Quality	Greenguard Gold   Certified

### Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, And ISO 21930
Embodied Carbon (Cradle to Gate)	5.2 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	25% (Pre-Consumer 0%   Post-Consumer 25%)

### Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.  
Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control  
Part 2: Flooring Optimization

X14 Material Transparency  
Part 1: Promote Ingredient Disclosure Optimization

**Absence of Asbestos**

**Absence of Heavy Metals**

**Absence of Halogenated Flame Retardants**

**Ortho-Phthalates Free**

**Greenguard Gold Certified**

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**Greenguard Gold Certified**

## Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation](#)







[Maintenance](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. \*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

					
Regenerate 00103 LRV 33.7   L* 64.74 V2 - Slight Variation	Enliven 00201 LRV 49.9   L* 75.98 V2 - Slight Variation	Leaf 00375 LRV 27.7   L* 59.64 V3 - Moderate Variation	Beyond 00450 LRV 12.9   L* 42.68 V3 - Moderate Variation	Engage 00475 LRV 21.7   L* 53.68 V3 - Moderate Variation	Stand Out 00486 LRV 20.2   L* 52.06 V3 - Moderate Variation




Edition 00516  
LRV 24.5 | L\* 56.61  
V2 - Slight Variation



Divert 00520  
LRV 39.9 | L\* 69.42  
V2 - Slight Variation



Outlook 00535  
LRV 18.8 | L\* 50.48  
V2 - Slight Variation



Muse 00585  
LRV 16.4 | L\* 47.49  
V2 - Slight Variation



Sustain 00595  
LRV 24.8 | L\* 56.89  
V3 - Moderate Variation



Spark 00855  
LRV 23.7 | L\* 55.82  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

