


ShawContract®

Terrain II Rigid Core


Collection	Terrain II	
Style Number	4125V	
Construction	Rigid Core With Inline Level Edge Profile	
Class / ASTM F3261	Class III, Type B	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	7 in w x 48 in l	18 cm w x 122 cm l
Actual Dimensions	7.00 in w x 48.00 in l	17.78 cm w x 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.157 in	4 mm
Edge Profile	Micro-Bevel	
Installation Type	InLine Level Edge	
Installation	Direct Glue	
Recommended Adhesive	4200 1 Gallon, 4200 4 Gallon, 2200 4 Gallon, 2200 1 Gallon or 4151	

Packaging

Area per Carton	27.96 sq ft	2.6 sq m
Weight per Carton	42.24 lbs	19.16 kg

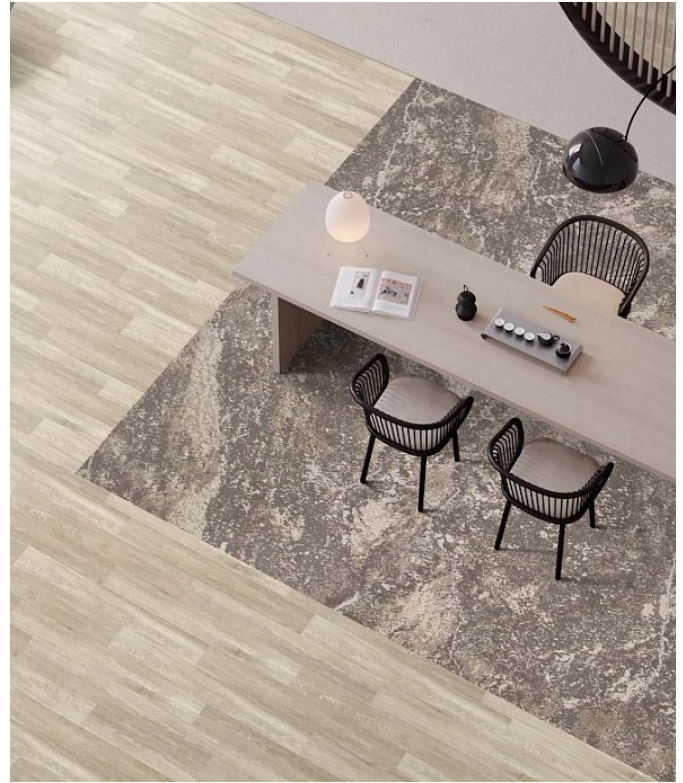

Recommended Installation Method



Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm, Terrain II 12 Mil 2.0

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *2500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Flexibility (ASTM F137)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Coefficient of Friction (ASTM D2047, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[Commercial 15 Year Underbed Bond Warranty](#)

[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certified

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
12.1 Kg CO₂/M²
20% (Pre-Consumer 20% | Post-Consumer 0%)

Global Product Assessment

Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost To The Customer.
GSA | Approved
CE Marking (EN 14041) | 3rd Party Certified
Country of Origin | United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control
Part 2: Flooring Optimization

X14 Material Transparency
Part 1: Promote Ingredient Disclosure Optimization

Absence of Asbestos

Absence of Heavy Metals

Absence of Halogenated Flame Retardants

Ortho-Phthalates

FloorScore Certified

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 1000 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Willow 00170
V3 - Moderate Variation



Thatch 00173
V2 - Slight Variation



Ash 00174
V3 - Moderate Variation




Saffron 00230
V2 - Slight Variation




Trail 00256
V2 - Slight Variation




Olive 00350
V2 - Slight Variation




Spruce 00360
V2 - Slight Variation



Aqua 00370
V2 - Slight Variation



Azure 00400
V2 - Slight Variation



Ink 00450
V2 - Slight Variation



Slate 00540
V2 - Slight Variation



Shade 00564
V2 - Slight Variation



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

