


GRAPHIS® Finetex™ & Rustex™
Geometric Design Panels
fine texture (Finetex™) / coarse texture (Rustex™)

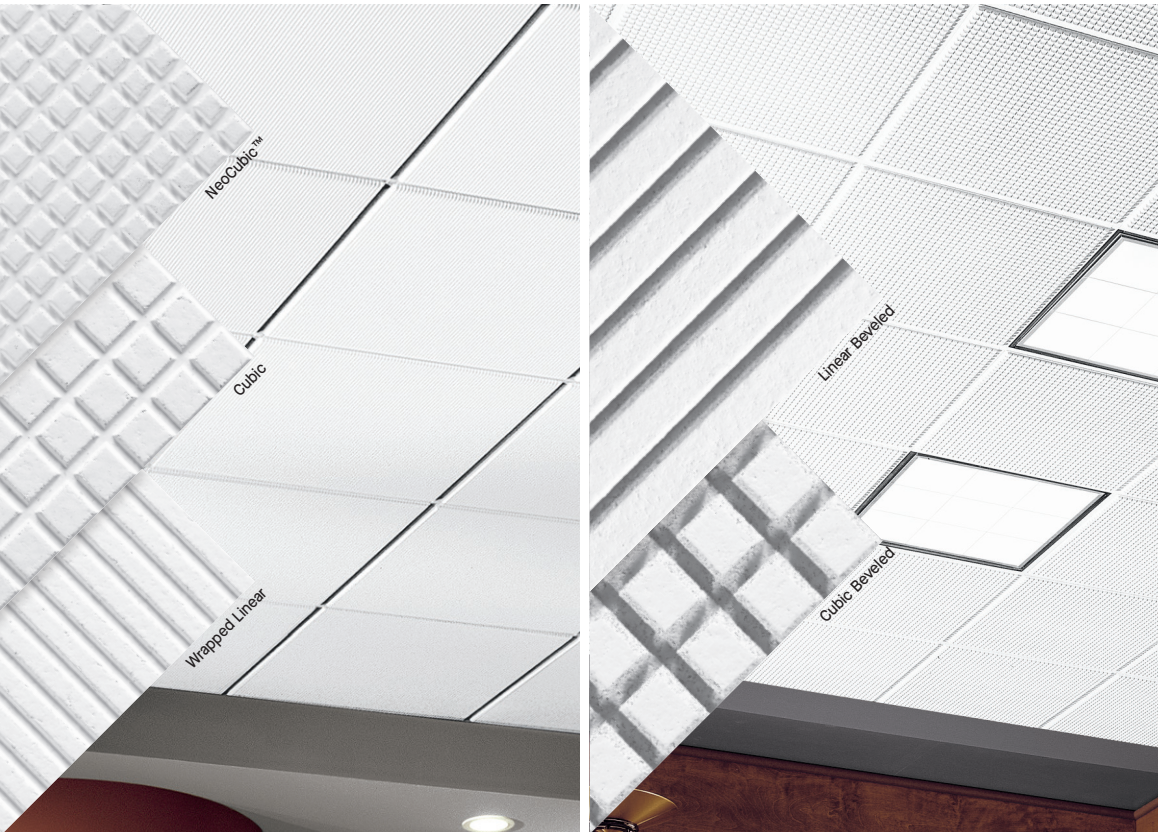

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

Graphis Finetex Wrapped Linear panels
with Suprafine XL 9/16" suspension system

Graphis Rustex Cubic Beveled panels
with Suprafine XL 9/16" suspension system

Bold geometric and linear patterns create unique visual designs some with standard acoustical performance.

KEY SELECTION ATTRIBUTES

- Graphis® panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

Finetex™

- Finely sculptured geometric patterns
- Single- and multi-design options
- High light reflectance
- Mold- and mildew-resistant surface
- 30-Year Limited System Warranty

Rustex™

- Bold geometric designs
- Good sound absorption
- Mold- and mildew-resistant surface
- 30-Year Limited System Warranty


COLOR



White
(WH)

NOTE: Finetex™ panels are not recommended for areas requiring acoustical performance.

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

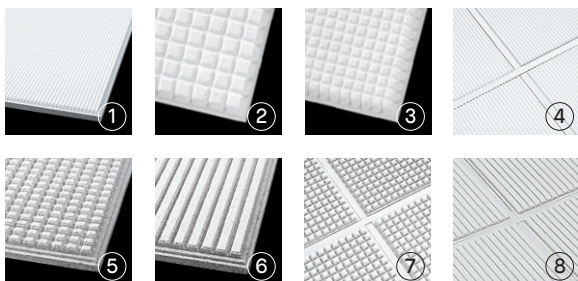

1. Graphis® Finetex™ Wrapped Linear
2. Graphis® Finetex™ Cubic
3. Graphis® Finetex™ NeoCubic™
4. Graphis® Finetex™ Wrapped Linear with Suprafine® 9/16" suspension system
5. Graphis® Rustex™ Cubic Beveled
6. Graphis® Rustex™ Linear Beveled
7. Graphis® Rustex™ Cubic Beveled with Suprafine® 9/16" suspension system
8. Graphis® Rustex™ Linear Beveled with Suprafine® 9/16" suspension system




GRAPHIS® Finetex™ & Rustex™

Geometric Design Panels
fine texture (Finetex™) / coarse texture (Rustex™)

Declare.

LOCATION DEPENDENT

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
GRAPHIS® Finetex™ 9/16" Wrapped Tegular 	Wrapped Linear		
	34	8005	24 x 24 x 3/4" <input type="checkbox"/>
	Cubic		
	36	8006	24 x 24 x 3/4" <input type="checkbox"/>
	NeoCubic™		
	35	8007	24 x 24 x 3/4" <input type="checkbox"/>
GRAPHIS® Rustex™ 15/16" Beveled Tegular 	Cubic Beveled		
	20	2600	24 x 24 x 3/4" <input type="checkbox"/>
	Linear Beveled		
	20	2602	24 x 24 x 3/4" <input type="checkbox"/>
GRAPHIS® Rustex™ 9/16" Beveled Tegular 	Cubic Beveled		
	33	2600	24 x 24 x 3/4" <input type="checkbox"/>
	Linear Beveled		
	33	2602	24 x 24 x 3/4" <input type="checkbox"/>

PERFORMANCE SELECTION


Dots represent high level of performance.

\$\$\$

UL Classified Acoustics	Total Acoustics ¹	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-Yr Warranty
N/A	35	N/A	Class A	0.90	N/A	N/A	•	Std	Std	•
N/A	35	N/A	Class A	0.90	N/A	N/A	•	Std	Std	•
N/A	35	N/A	Class A	0.90	N/A	N/A	•	Std	Std	•
0.55	30	N/A	Class A	0.75	•	•	•	Std	•	•
0.55	30	N/A	Class A	0.75	•	•	•	Std	•	•
0.55	30	N/A	Class A	0.75	•	•	•	Std	•	•
0.55	30	N/A	Class A	0.75	•	•	•	Std	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

ASTM E1264 Classification
Finetex: Type A, Form A1.2, Pattern F
Rustex: Type A, Form A1.2, Pattern J
Fire Class A

Anti-Mold/Mildew (Rustex™ only)
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL™ Building Challenge, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor - 1.6 (BTU units)
R Factor - 0.28 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
0.90 LBS/SF; 48 SF/CTN

Minimum Order Quantity
1 carton

Metric Items Available
2600M, 2602M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

