


Enclose

Unitized panels. Frameless glass. Endless possibilities.

With the look, feel, and performance of conventional construction, Enclose movable walls offer privacy options that can quickly adapt for changing needs.



Statement of Line

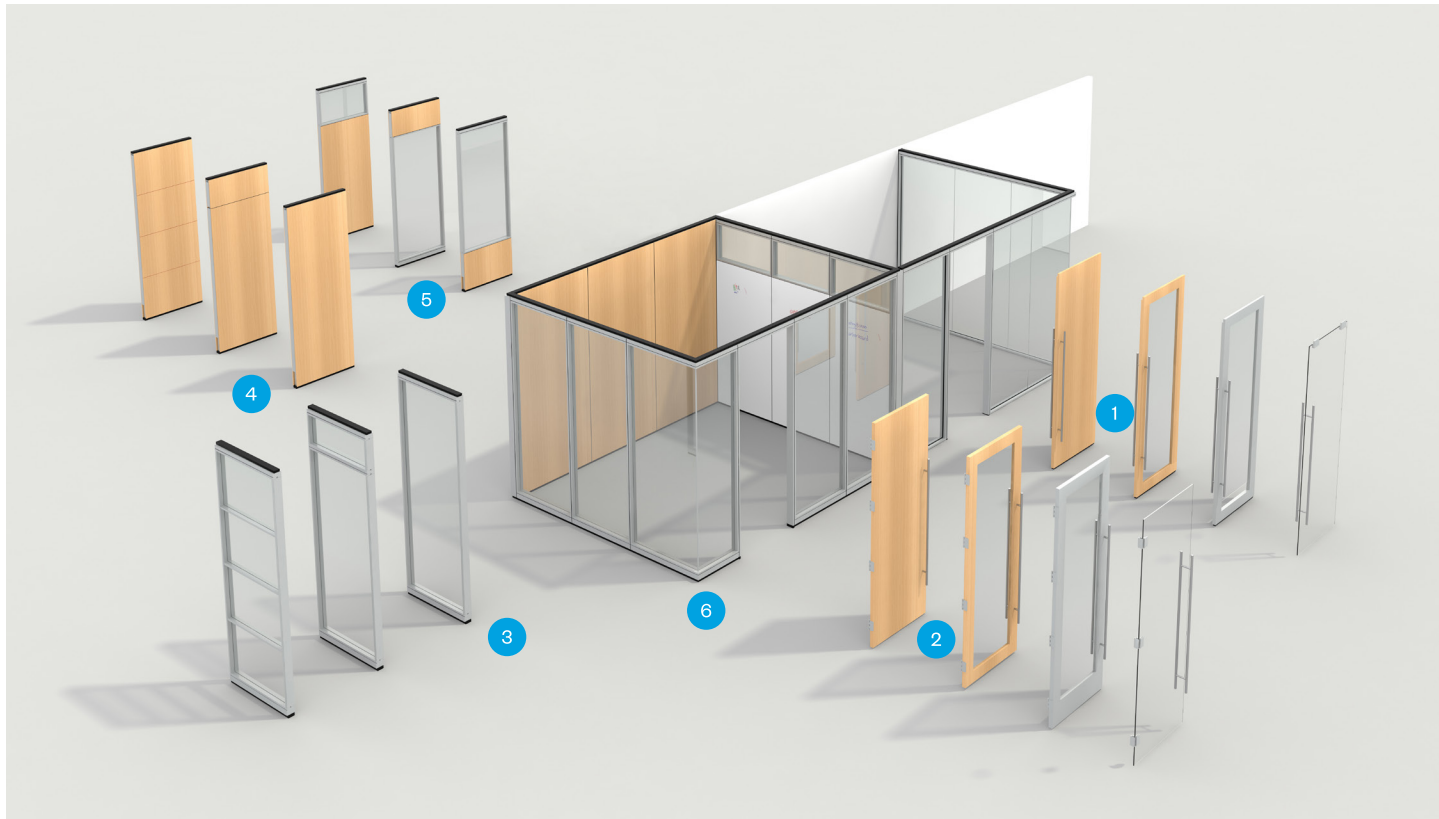

1 Sliding Doors - 40" W

Wood
Wood Glazed
Metal Glazed
Glass Slab

2 Swing Doors - 36" W

Wood
Wood Glazed
Metal Glazed
Glass Slab

3 Glass Panels

Full-Height
Full-Height with Transom
Multi-Segment

4 Solid Panels

Full-Height
Full-Height with Transom
Multi-Segment

5 Combination Panels

Solid to Glass
Glass to Solid Transom
Clerestory

6 Glass Corner

2-Way 90°
2-Way 135°
3-Way 90°

Features & Options

- Unitized, non-progressive for quick, damage-free setup accommodating ceiling heights up to 10'h.
- Non-marring ceiling clips locks Enclose to the building ceiling grid or finished ceiling.
- Profile width: 4".
- Side and top cuttable panels offers custom fit to irregular building conditions.
- Enclose is also available as a freestanding application up to 10'h – no ceiling attachment required.
- Pairs with Enclose Frameless Glass and traditional walls.
- Maximum system height is 12' (144").
- Glass or solid Transoms are available for above wall panels and doors.
- Swap panels and doors without disrupting the wall.
- Swing/sliding doors in glass, wood, or metal; monolithic/segmented tiles.
- Integrated slots for hanging desking and storage.
- Vertical Adjustment: Up 1 3/4" (44 mm) or down +/- 3/4" (19 mm).
- Full-height doors up to 10' (3048mm).
- Soft-close sliding door option.
- Mortise and cylindrical latch sets: Schlage.
- Linear pulls available from 12"-84" long.
- STC Ratings, Single Glazed Framed:
 - 6mm Tempered – 27
 - 10mm Tempered – 28
 - 10mm Laminated – 32
- STC Ratings, Solids:
 - Wallcovering Tile – 42
 - Laminate / Veneer / HPL Tile – 46
 - Steel Tile – 49

Certifications/Accolades

- BIFMA LEVEL® 3 Certified
- GREENGUARD Certified
- Living Building Challenge Declare