


**Seamless Glass, Endless Possibilities – Elegance Meets Flexibility.**

Enclose Frameless Glass, available in single or double glass, combines sleek, floor-to-ceiling glass with the flexibility of a reconfigurable system. Designed to complement Enclose.

## Enclose Frameless Glass



## Statement of Line

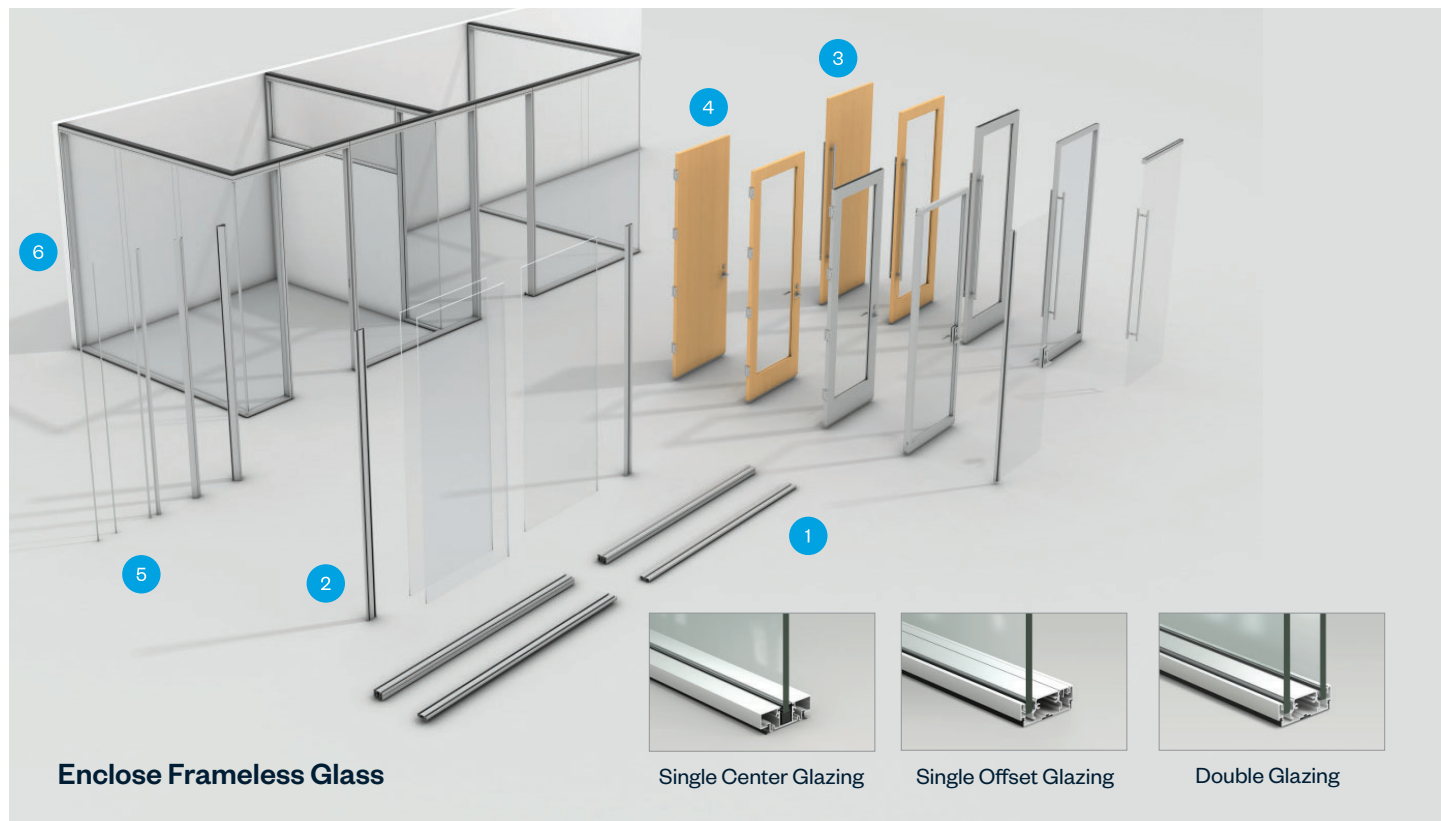

### Enclose Frameless Glass

Single Center Glazing

Single Offset Glazing

Double Glazing

- |   |   |   |
|---|---|---|
| <p><b>1 Frameless Glass, Single Glaze</b><br/>Center glazing and offset glazing<br/>Offset single glazing allows for double glazing to be added<br/>Full height and Stack-ons<br/>10mm + 12mm glass</p> | <p><b>3 Sliding Doors - 40" W</b><br/>Wood Slab + Wood Glazed<br/>Metal Glazed<br/>Double Glazed<br/>Glass Slab</p> <p><b>4 Swing Doors - 36" W</b><br/>Wood Slab + Wood Glazed, Butt Hinge<br/>Metal Glazed, Butt Hinge<br/>Double Glazed, Pivot Hinge<br/>Glass Slab, Pivot Hinge</p> | <p><b>5 Glass Joint + Corners</b><br/>Inline<br/>2-Way 90°<br/>2-Way Variable Angle<br/>3-Way 90°</p> <p><b>6 Interface Panels</b><br/>Flush Fly-by Post<br/>Chamfer Fly-by Post, EFG + EFG 2 Channel<br/>Center Bridge Post<br/>FIP Hardwall + Mullion Starter</p> |
| <p><b>2 Frameless Glass, Double Glazing</b><br/>Full-Height<br/>Double + Single Offset Glazing 10mm + 12mm Glass</p>  |   |   |

### Features & Options

- Non-marring ceiling clips locks EFG to the building ceiling or finished ceiling.
- Profile width: 4". Bottom Rail Height: 7/8" (22 mm).
- Supports double glazed or single offset glazed walls.
- Seals minimize sound transmission.
- Works as a storefront or with Enclose for a seamless transition.
- Fits most ceilings with removable grid clips.
- Frameless to 10 ft.
- Frameless glass stack available to support maximum height up to 144".
- No restriction on maximum width.
- Can be faceted using silicone or variable angle glass corner.
- Powder-coated aluminum resists wear and touch-ups.
- Black or Grey reveals; Black or Clear glazing beads.
- Butt-jointed double glazing for transparency and acoustic performance.
- Height: Up to 144" (3658 mm).
- Glass Thickness: 10 mm tempered - 12 mm tempered or laminated.
- Vertical Adjustment: +/- 3/4" (19 mm).
- STC Ratings, Single Glazed Frameless:
  - 10mm Tempered - 35
  - 12mm Tempered - 36
  - 2mm Laminated - 37
- STC Ratings, Double Glazed Frameless: 10mm Tempered + 12mm Tempered - 47
- 10mm Tempered + 12mm Laminated - 48
- 12mm Tempered + 12mm Laminated - 50
- 12mm Laminated + 12mm Laminated - 50
- Soft-close sliding door option.
- Mortise and cylindrical latch sets: Schlage.
- Linear pulls available from 12" - 84" long.

### Sustainability & Certifications

- BIFMA LEVEL 3 Certified
- GREENGUARD Certified