

## Oslo

- Single lamp suspended luminaire pendant with 5.2-inch diameter cylinder glass shade
- Solid brass hardware with powder coat or metal plated finish
- Suitable for decorative ambient applications
- Cable cord or stem suspension option available
- 120V input, E26 base socket
- Glass shade available in amber or clear (custom option available upon request)
- ELV dimmable vintage LED lamp



CG25 LED Bulb



AG25 LED Bulb



AS18 LED Bulb





AG30 Incandescent Bulb



1804NA Amber Glass



1804NC Clear Glass

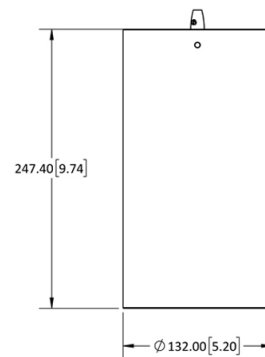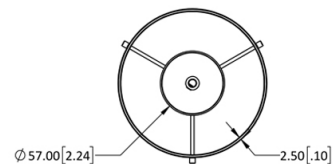

**DIMENSIONS ARE IN MILLIMETERS [INCHES]  
(NOT TO SCALE)**


### Variable Specs

**Note:** Variable spec listed below are dependant on system code selection.


- Black
- Polished Chrome
- White
- Bronze
- Silver or Aluminum
- Champagne (Matted Gold)

Special Note: \*All fixtures and lighting systems must be used with dedicated circuit and a Prima transformer, driver, and/or ballast to comply with cUL/cETL listing; or all warranties are void.


SYSTEM CODE:	LUMEN STYLES:	FINISH COLORS:
(10) 120V ADAPTER FOR P-TRACK FIXTURE	HD/11	BK/SV/WH
(20) FIT SYSTEM	Not Available	Not Available
(25) 120V RETRO-FIT ADAPTER FOR H-TRACK FIXTURE	Not Available	Not Available
(26) 120V RETRO-FIT ADAPTER FOR J-TRACK FIXTURE	Not Available	Not Available
(27) H-TRACK RETRO FIT ADAPTER	Not Available	Not Available
(28) J-TRACK RETRO FIT ADAPTER	Not Available	Not Available
(29) HOUSING ADAPTER FOR P-TRACK	Not Available	Not Available
(40) LOW VOLTAGE MONORAIL SYSTEM	Not Available	Not Available
(42) CABLE SYSTEM - 6" WIDTH	Not Available	Not Available
(43) CABLE SYSTEM - 2.75" WIDTH	Not Available	Not Available
(E1) MONOPOINT 5" CANOPY W/ 120V TO 12V TRANSFORMER	Not Available	Not Available
(E2) MONOPOINT 5" CANOPY W/ 277V TO 12V TRANSFORMER	Not Available	Not Available
(E3) MONOPOINT 5" CANOPY W/ 120V BALLAST OR LED 120V/12V TRANSFORMER	Not Available	Not Available
(E4) MONOPOINT 5" CANOPY W/ 277V BALLAST OR LED 277V/12V TRANSFORMER	Not Available	Not Available
(E5) MONOPOINT 5.5" CANOPY W/ DIMMABLE 120V~277V BALLAST	Not Available	Not Available
(E6) MONOPOINT 5.5" CANOPY W/ CONSTANT CURRENT DRIVER	Not Available	Not Available
(M1-M7) MULTIPOINT	Not Available	Not Available
(P1) MONOPOINT DIA. 0.7" W/ THREADED NIPPLE MOUNTING	Not Available	Not Available
(P2) MONOPOINT DIA. 1.6" W/ THREADED NIPPLE MOUNTING	Not Available	Not Available
(P3) MONOPOINT DIA. 1.6" W/ SCREW/ANCHOR MOUNTING	Not Available	Not Available
(P4) MONOPOINT 5" DIRECT MOUNT SQUARE COVER PLATE	Not Available	Not Available
(P5) MONOPOINT 5" JBOX PLATE	HD/11	BK/BZ/CP/PC/SV/WH



(10) 120V ADAPTER FOR P-TRACK FIXTURE




(20) FIT SYSTEM




(25) 120V RETRO-FIT ADAPTER FOR H-TRACK FIXTURE


NOTE: DIMENSIONS ARE IN MILLIMETERS [INCHES]

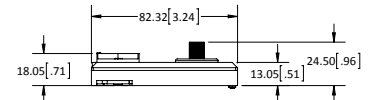


(26) 120V RETRO-FIT ADAPTER FOR J-TRACK FIXTURE

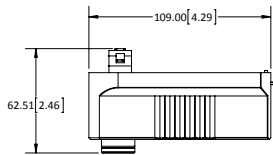


(27) H-TRACK ADAPTER




(28) J-TRACK ADAPTER

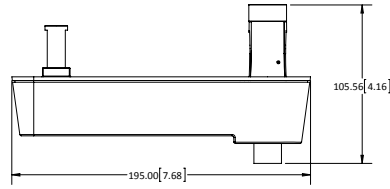


(29) HOUSING ADAPTER FOR P-TRACK




(40) LOW VOLTAGE MONORAIL SYSTEM

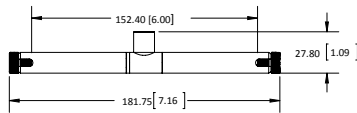


(42) CABLE SYSTEM - 6.00" WIDTH




(43) CABLE SYSTEM - 2.75" WIDTH

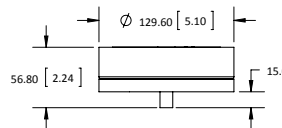


(E1) MONOPOINT 5" CANOPY W/ 120V TO 12V TRANSFORMER

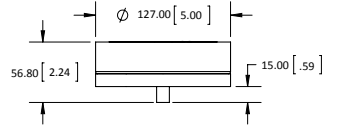


(E2) MONOPOINT 5" CANOPY W/ 277V TO 12V TRANSFORMER

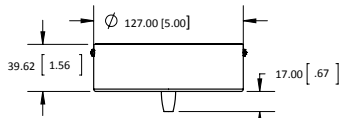


(E3) MONOPOINT 5" CANOPY W/ 120V BALLAST OR LED 120V/12V TRANSFORMER

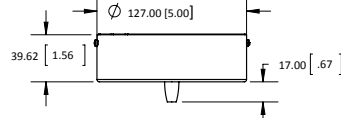


(E4) MONOPOINT 5" CANOPY W/ &+V BALLAST OR LED 277V/12V TRANSFORMER

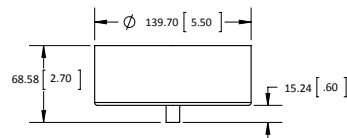


(E5) MONOPOINT 5.5" CANOPY W/ DIMMABLE 120V~277V BALLAST  
(E6) MONOPOINT 5.5" CANOPY W/ CONSTANT CURRENT DRIVER




(P1) MONOPOINT DIA. 0.7" W/ THREADED NIPPLE MOUNTING




(P2) MONOPOINT DIA. 1.6" W/ THREADED NIPPLE MOUNTING



(P3) MONOPOINT DIA. 1.6" W/ SCREW/ANCHOR MOUNTING

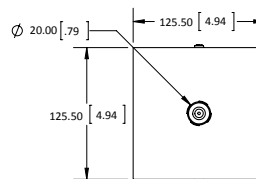

(P4) 5" DIRECT MOUNT SQUARE COVER PLATE



(P5) MONOPOINT 5" JBOX PLATE