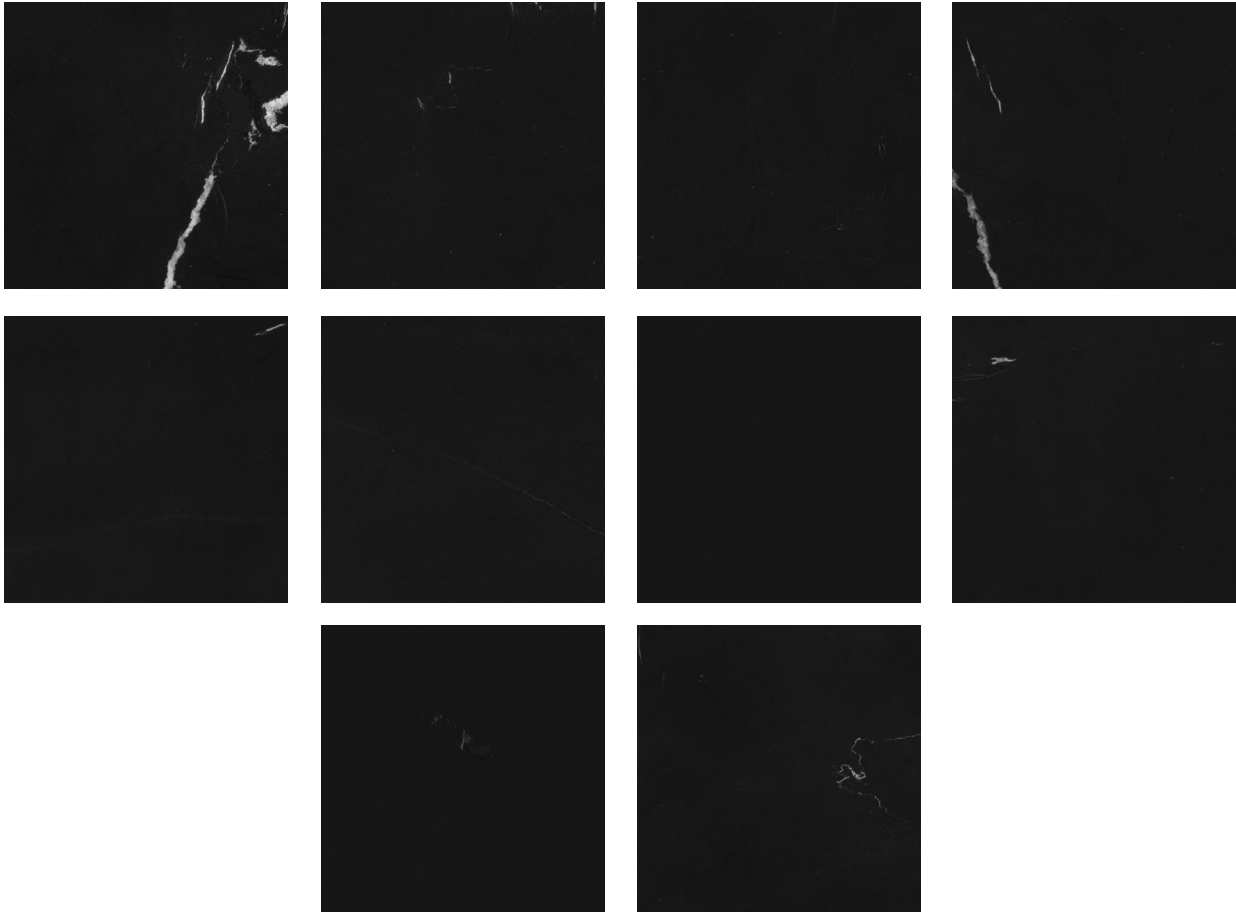



BLACK LIGHTNING

Like quick flashes of lightning in the night sky, bolts of white veining sporadically streak across the pitch-black backdrop of Black Lightning, with some tiles having minimal or no veining. The Turkish marble, also known as Black Toro, is stocked in a 24"x24" honed tile.




BLACK LIGHTNING



APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4 		CARPET CUTTING	
Commercial Light/Medium	All	Yes, including steam	Yes, including steam	No	No	No	Yes	Yes	FIELD			
									FINISH			
									MOSAIC			
									SADDLE			
									VANITY TOP			
									WATERJET			

INSTALLATION/MAINTENANCE										
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE
See details below ¹	Ardex FG-C Microtec Unsanded ²	1/16" minimum	Ardex 8 + 9	Ardex SX Silicone Sealant	AquaMix Sealer's Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Sample Dry Layout	

NOTES
¹Setting material - Ardex P4 Primer + Ardex X77 White Microtec Fiber Reinforced Mortar ¹Alternate setting material - Ardex 100% Solids Epoxy Adhesive White or Mapei Kerapoxy 410 ²Alternate grout - Ardex DG 1 - One Component Grout or Mapei Keracolor Unsanded Tech Note: Resin or mesh-backed stone field tile must be installed with epoxy mortar or a combination of suitable primer and cement-based mortar. Consult your setting materials manufacturer for specific recommendations. Minor vein washout is possible in wet installations.

AVAILABLE SIZES
 24" X 24" X 3/8" Honed Aris Edge Stone Tile 4 SF / PC