LILAC


A clean white marble dramatically streaked with plum colored veining, Lilac is a beautiful natural stone with purple personality. Stocked in a variety of field tiles, liners, mosaics and slabs.




LILAC



24" × 24" Field Tile - Honed

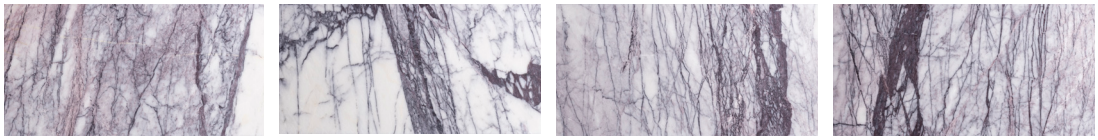

Lilac Dark | 12" × 24" Field Tile - Honed [1]

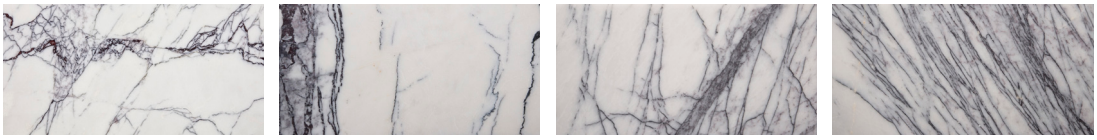

12" × 24" Field Tile - Honed



4" × 12" Field Tile - Honed



Mini Broken Joint (1cm) Mosaic
Honed




Thin Herringbone Mosaic
Honed



Walden Waterjet Mosaic
Honed



Hexagon Mosaic
Honed




Flute Lilac
Honed

APPLICATIONS

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light/Medium Traffic Commercial	All	Yes, Including Steam	Yes, in Mosaic	No	Yes, non-freeze thaw	No	Yes	Yes

VARIATION [2]



INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 Tile & Stone Mortar[4]	Ardex FG-C Microtec Unsanded[5]	1/16" minimum	Mapei Mapelastic AquaDefense	Mapei Keracaulk Unsanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Partial[6]


TAILORED TO CUSTOMIZATION [3]

CARPET CUTTING
FIELD
FINISH
MOSAIC
SADDLE
VANITY TOP
WATERJET


NOTES

[1] Lilac Dark - Heavily Veined
[2] Hexagon Mosaic is V3
[3] Field tile and slab formats only
[4] Alternate Mortar - Mapei Kerabond w/Keralastic Additive or Mapei Ultraflex 2
[5] Alternate Grout - Mapei Ultracolor Plus FA or Mapei Keracolor Unsanded
[6] Layout for color and vein selection

AVAILABLE SIZES



SLAB
3/4" (2 cm)
Polished



FIELD TILE
24" × 24" × 3/8"
Honed




WALDEN MOSAIC
(1.25 SF)
Honed




THIN HERRINGBONE MOSAIC
(0.88 SF)
Honed



MINI BROKEN JOINT (1CM) MOSAIC
(1.00 SF)
Honed



HEXAGON MOSAIC
(0.96 SF)
Honed




FLUTE
12" × 24" × 3/8"
- *Projection 0.85"*
Honed

OPUS ONE
1/2" × 12" × 3/4"
Honed



FIELD TILE
12" × 24" × 3/8"
Honed



FLATIRON
1" × 12" × 3/4"
Polished

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone, B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.