


CHARLESTON MIRROR

Metallurgy meets chemistry in the Charleston Mirror Collection. Handmade using traditional techniques by skilled artists, this exquisite mirrored glass is painstakingly created piece-by-piece using a classic antiquing process.



PICTURED: 9"X18" STRAIGHT EDGE ANTIQUE MIRROR

CHARLESTON MIRROR

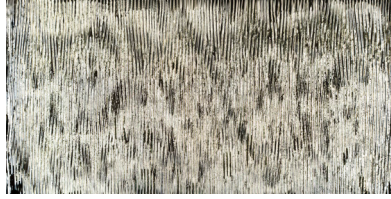

Gaslight Antiqued Mirror
Hand-Silvered - 6" × 12" × 1/8"
Custom sizes available based on maximum
sheet size 70" × 82" × 1/8"




Veranda Antiqued Mirror
Hand-Silvered - 6" × 12" × 1/8"
Custom sizes available based on maximum
sheet size 36" × 56" × 1/8"



Straight Edge Antiqued Mirror
Hand-Silvered - 9" × 18" × 3/16"



Straight Edge Antiqued Mirror
Hand-Silvered - 12" × 24" × 3/8"
Custom sizes available based on maximum sheet size 72" × 130", thickness may vary.
Rose Gloss available based on maximum sheet size 45" × 90" × 3/16"



Carolina Mirror
Tarnished Satin - 4 1/2" × 18" × 1/4"

APPLICATIONS									VARIATION ¹		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4		CARPET CUTTING	
No	Dry application only	No	No	No	No	No	No	No			FIELD	
											FINISH	
											MOSAIC	
											SADDLE	
											VANITY TOP	
											WATERJET ²	
INSTALLATION/MAINTENANCE										AVAILABLE SIZES		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT			
C.R. Laurence Gunther Extra Build Mirror Mastic	Mapei Keracolor Unsanded ³	1/16" minimum	No	Mapei Keracaulk Unsanded	Not Required	No	A.T. Guidelines	No	Recommended	FIELD TILE STRAIGHT EDGE ANTIQU MIRROR 6" × 12" × 1/8" FIELD TILE STRAIGHT EDGE ANTIQU MIRROR 12" × 24" × 1/8"		
NOTES												
¹ Extreme variation in both color and texture from piece to piece and lot to lot. Carolina Mirror - V4 ² Waterjet - 12" × 24" × 3/8" ³ Alternate grout for Carolina Mirror only - Ardex FG-C Microtec Unsanded Tech Note: Tempered Charleston Mirror (12" × 12" × 1/8" minimum size) is available on a special order basis for high heat applications. Gaslight, Veranda cannot be tempered. Can be used with Category 2 safety backing as an alternate with no minimum and is available on a special order basis. For high heat areas, the use of CR Laurence Glazier Tape is recommended for straight edge field tiles. For high heat areas, a 1/8" grout joint is recommended. Mirror may be set with a minimum joint of 1/16" and left un-grouted if desired.												