

# GRAFFIO

—  
Graffio combines a rich texture over soft fossils and veins to present an artisanal-look porcelain tile. Stocked in Smoke, Sand, and Charcoal, in 24" x 48" x 3/8" tile.




# GRAFFIO



*Smoke*



*Sand*

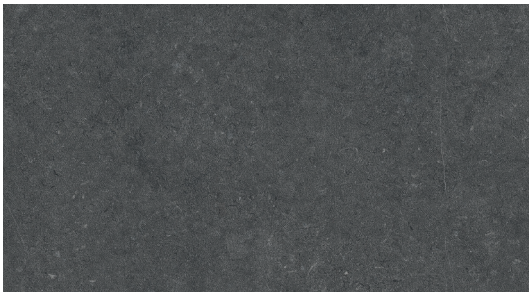

*Charcoal*

APPLICATIONS									ATTRIBUTES	VARIATION	TAILORED TO CUSTOMIZATION
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	DCOF		CARPET CUTTING
Commercial Light / Medium	All	Yes, including steam	Yes, conventional only <sup>1</sup>	No	Yes, including freeze thaw	No	No	Yes			0.59. 0.66. 0.67.
											FINISH
											MOSAIC
											SADDLE
											VANITY TOP
											WATERJET

INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR LINK	<p>PORCELAIN RECTIFIED FIELD TILE 24" x 48" x 3/8"</p>
Ardex X77 White Microtec Fiber Reinforced Mortar <sup>2</sup>	Ardex FL Rapid Set Sanded <sup>3</sup>	1/16" minimum	Ardex 8+9	Ardex SX	AquaMix Grout Release	AquaMix Concentrated Cleaner	TCNA Handbook	Max. 33% Offset	Recommended		

NOTES
<p><sup>1</sup> Mosaic format only</p> <p><sup>2</sup> Alternate Setting Materials: Ardex X5 White Medium Bed Mortar or Mapei Ultraflex LFT White</p> <p><sup>3</sup> Alternate Grout: Ardex DG - 1 One Component Grout or Mapei Ultracolor Plus FA</p> <p>Tech Notes: Product MUST be installed in accordance with current TCNA Handbook tile methods. Dry laying of this product prior to installation is recommended. Porcelains that meet the DCOF standard may have more abrasive surface that might show dirt or debris. Remove with soap, water and firm scrubbing in order to clean. Consider this in the selection process. Per TCNA guidelines, running bond/brick joint patterns to be set with a max. offset of 33% and min. grout joint of 1/16", unless otherwise approved by owner. Grout release can be utilized, and bag grouting may be considered.</p>