

CANYONLAND

Inspired by a distinctive sedimentary stone quarried in Italy's Apennine mountains, Canyonland Porcelain renders its unique look in a versatile porcelain format. Available in textured and matte finishes, this collection offers a refined sedimentary rock aesthetic in a fresh palette of White, Beige, and Grey. Available in large-format 24" x 48" rectified tiles, Canyonland delivers a fluid, elevated look for modern spaces.



CANYONLAND


Matte



Beige



Grey

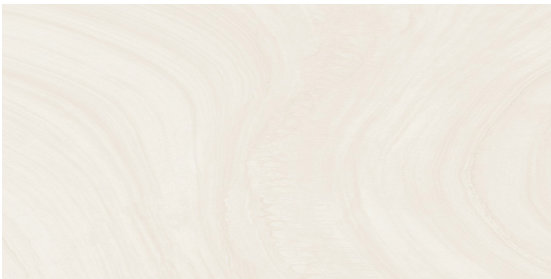

White

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	CARPET CUTTING FIELD FINISH MOSAIC SADDLE VANITY TOP WATERJET		
Commercial Light/ Medium	All	Yes, including steam	Yes, including steam	No	Yes, including freeze thaw	No	Yes	Yes				
INSTALLATION/MAINTENANCE									AVAILABLE SIZES			
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT			QR CODE
Ardex X77 White Microtec Fiber Reinforced Mortar ¹	Ardex FL Rapid Set Sanded ²	1/16" minimum	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Grout Release	AquaMix Concentrated Cleaner	TCNA Handbook	Max. 33% Offset	Recommended			
NOTES												
¹ Alternate setting material: Ardex X5 White Medium Bed Mortar or Mapei Ultraflex LFT White ² Alternate grout: Ardex FG-C Microtec Unsanded or Mapei Ultracolor Plus FA Tech notes: Product MUST be installed in accordance with current TCNA Handbook tile methods. Dry laying of this product prior to installation is recommended. Per TCNA guidelines, running bond/brick joint patterns to be set with a max. offset of 33% and min. grout joint of 1/16", unless otherwise approved by owner. Grout release can be utilized prior to grouting.											RECTIFIED FIELD TILE 24" X 48" X 3/8" Matte	

CANYONLAND

Textured



Beige



Grey



White

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4		CARPET CUTTING FIELD FINISH MOSAIC SADDLE VANITY TOP WATERJET	
No	All	Yes, including steam	No	No	Yes, including freeze thaw	No	No	Yes				

INSTALLATION/MAINTENANCE											AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE	RECTIFIED FIELD TILE 12" X 24" X 3/8" Textured	
Ardex X77 White Microtec Fiber Reinforced Mortar ¹	Ardex FL Rapid Set Sanded ²	1/16" minimum	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Grout Release	AquaMix Concentrated Cleaner	TCNA Handbook	Max. 33% Offset	Recommended			
NOTES												
¹ Alternate setting material: Ardex X5 White Medium Bed Mortar or Mapei Ultraflex LFT White ² Alternate grout: Ardex FG-C Microtec Unsanded or Mapei Ultracolor Plus FA Tech notes: Product MUST be installed in accordance with current TCNA Handbook tile methods. Dry laying of this product prior to installation is recommended. Porcelains that meet the DCOF standard may have a more abrasive surface that might show dirt or debris. Remove with soap, water and firm scrubbing in order to clean. Consider this in the selection process. Per TCNA guidelines, running bond/ brick joint patterns to be set with a max. offset of 33% and min. grout joint of 1/16", unless otherwise approved by owner. Grout release can be utilized, and bag grouting may be considered.												