



MAIN RUNNER
(GASKETED)

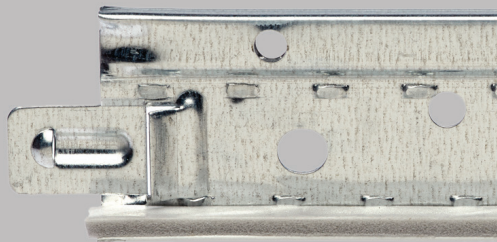

CROSS TEE
(GASKETED)

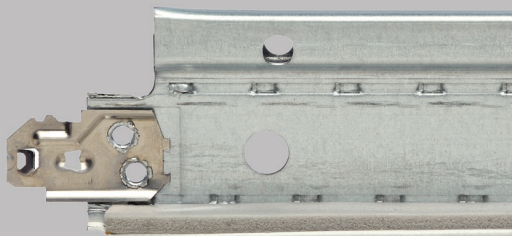

7/8" WALL ANGLE
(GASKETED)




15/16" EZ Stab All-Aluminum Cleanroom System

The EZ Stab All-Aluminum Cleanroom System is ideal for non-ferrous applications, high-humidity environments, and provides a clean, particulate free, sealed ceiling system for controlled environment rooms.


Features & Benefits

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Tested as a component in clean room design to Class 3 (as defined by ISO Standard 14644-1)
- Combine with CertainTeed's: Aquarock™, Envirogard™, Symphony® f, Symphony m, Symphony m Rx, Vinylrock™ or VinylShield™ to achieve product-specific clean room performance.
- Satisfies FGI Healthcare Guidelines for ceilings systems for panels weighing less than one pound per square foot in semi-restricted applications
- Rolled Aluminum profile offers superior protection from corrosive and/or high-humidity applications
- Non-ferrous construction enables use in MRI suites

Main Runner



Wall Angle



LEED® v4

RECYCLED CONTENT up to 99%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Material Ingredients (HPDs)
- ✓ EQ: Low-Emitting Material
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



HPD AVAILABLE

15/16" EZ Stab All-Aluminum Cleanroom System

| | GRID FACE (IN.) | DESCRIPTION (IN.) | SLOT SPACING (IN.) | PIECES/CARTON | FT./CARTON | SEISMIC DESIGN CATEGORY | STRUCTURAL CLASSIFICATION (ASTM C635) | RECYCLED CONTENT PRE* | RECYCLED CONTENT POST* | RECYCLED CONTENT TOTAL* | ALLOWABLE UNIFORM LOAD (PLF) | ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)** |
|---------------|-----------------|---------------------|--------------------|---------------|------------|-------------------------|---------------------------------------|-----------------------|------------------------|-------------------------|------------------------------|--|
| Main Runners | | | | | | | | | | | | |
| EZACR12-12-23 | 15/16 | 144 x 1-1/2 x 15/16 | 6 O.C. | 20 | 240 | A, B | LD | — | — | 99% | 6.86 | 18.9 |
| Cross Tee | | | | | | | | | | | | |
| EZACR2-12-23 | 15/16 | 24 x 1-1/2 x 15/16 | — | 60 | 120 | — | — | — | — | 99% | 43.35 | 59.8 |
| EZACR4-12-23 | 15/16 | 48 x 1-1/2 x 15/16 | 12 O.C. | 60 | 240 | — | — | — | — | 99% | 6.86 | 18.9 |
| Wall Angle | | | | | | | | | | | | |
| CRWA14-14 | 7/8 | 144 x 7/8 x 7/8 | — | 40 | 480 | — | — | 19% | 69% | 88% | — | — |

*Maximum recycled content percentage. Recycled content varies by manufacturing location.

**Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.

Accessories

| | ITEM NUMBER | PRODUCT NAME | DIMENSIONS L" X W" X H" (MM) | COLOR | PIECES/CARTON | LBS./CARTON |
|----------|-------------|---|--|-------|---------------|-------------|
| STANDARD | PAHD | Plastic Adjustable Hold Down Clip | 1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43) | Black | 50 | 1 |
| | SSHW12 | Stainless steel wire 12' (non-magnetic) | 144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage) | Metal | 141 | 50 |
| | EZSLOTTER | Slot Punch | 11 x 3-1/4 x 1 (280 x 83 x 26) | Metal | 1 | 2.5 |

Physical Data

MATERIAL

Rolled Aluminum

FACE DIMENSION

15/16"

CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

DUTY CLASSIFICATION

Light duty per ASTM C635

SURFACE FINISH

Painted Aluminum Cap

PROFILE HEIGHT

1-1/2"

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

END DETAIL

Main Runner: Integral Stab
Cross Tee: Staked-on Stab Clip

WARRANTY

10-year Limited Suspension Systems warranty increases to 30 years when installed with CertainTeed ceiling panels. Full warranty information can be found at [certainteed.com/warranty](https://www.certainteed.com/warranty)

Mechanical Performance

MAIN RUNNER MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

CROSS TEE MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

*Requires the use of a single aluminum rivet through the cross tee clip



CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com](https://www.certainteed.com)