

Ecophon® Akusto™ Wall C Texona

FIBERGLASS SMOOTH WALLS

Smooth fabric surface envelopes fiberglass panel and offers outstanding sound performance.

Features & Benefits

- Smooth, Texona fabric surface texture
- Use as a complement and/or alternative to acoustical ceiling panels for excellent performance within a space
- Available in 14 colors
- Moisture resistant
- Texona surface supports UV curable ink-jet printing of images (by a professional printer)

Attributes



**MOLD/MILDEW
RESISTANT
INHERENT**



**EMISSION
COMPLIANT
CERTIFIED**



**LR 0.81
(SEA SALT)**



**RECYCLED
CONTENT**

LEED® v4

RECYCLED CONTENT	53%	
	PRE: 0%	POST: 53%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-emitting Material
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning
- ✓ MR: Material Ingredients (C2C)

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS




EPD AVAILABLE


Ecophon® Akusto™ Wall C Texona

FIBERGLASS SMOOTH WALLS


Colors

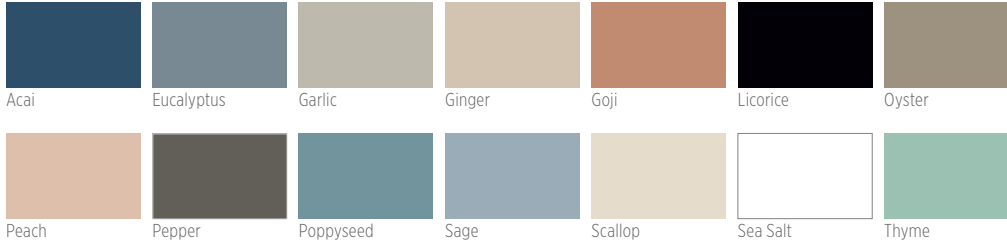

Akusto Wall C Texona Panels












Akusto Wall C Texona Panels		COLOR	DIMENSIONS MM (IN.)	NRC	LR	RECYCLED CONTENT	PIECES/ CARTON	SQ. M (FT.)/ CARTON	LBS./ CARTON	
Wall Panel										
	NRC .95	3557 1002	Garlic	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.52	53%	4	21.3 (≈ 70)	71
		3557 1004	Pepper	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.17	53%	4	21.3 (≈ 70)	71
		3557 1005	Licorice	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.05	53%	4	21.3 (≈ 70)	71
		3557 1011	Ginger	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.56	53%	4	21.3 (≈ 70)	71
		3557 1056	Oyster	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.32	53%	4	21.3 (≈ 70)	71
		3557 1060	Sea Salt	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.81	53%	4	21.3 (≈ 70)	71
		3557 1064	Acai	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.11	53%	4	21.3 (≈ 70)	71
		3557 1065	Thyme	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.47	53%	4	21.3 (≈ 70)	71
		3557 1066	Poppyseed	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.28	53%	4	21.3 (≈ 70)	71
		3557 1081	Goji	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.27	53%	4	21.3 (≈ 70)	71
		3557 1082	Peach	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.55	53%	4	21.3 (≈ 70)	71
		3557 1083	Sage	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.40	53%	4	21.3 (≈ 70)	71
		3557 1080	Eucalyptus	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.23	53%	4	21.3 (≈ 70)	71
		3557 1084	Scallop	2700 x 600 x 40 (≈ 106 x 24 x 1-1/2)	0.95	0.76	53%	4	21.3 (≈ 70)	71

Edge Details



Kerfed Edge

Accessories

AKUSTO WALL C TEXONA ACCESSORIES		PRODUCT NAME	PIECES/ CARTON	USE
	2630 0214	Connect Fixing Bracket	260	For direct fixing of Connect WP Profile to structure; Not recommended for installations requiring impact-resistance
	2631 1050	Connect WP Space Bar (Galvanized)	10	For use in conjunction with WP Profile when Akusto Wall C panels are installed vertically
	2631 1051	Connect WP Profile Connect (White 03)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted; direct-attached when installation requires impact-resistance
	2631 1052	Connect WP Profile (Natural 02)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted; direct-attached when installation requires impact-resistance
	2631 1074	Connect WP Profile (Black 01)	8	Installed on walls and provides channel into which Akusto Wall C panels are inserted; direct-attached when installation requires impact-resistance
	2631 1057	Connect WP External Corner (White 03)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2631 1058	Connect WP External Corner (Grey 02)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2631 1059	Connect WP External Corner (Black 01)	4	Used in conjunction with WP Profile to create 90 degree outside corners
	2630 0933	WP Profile Splice	4	For use when running multiple lengths of WP Profile end-to-end
	2630 1219	Connect Spline (Black)	100	For use in the kerf between Akusto Wall C panels when they are installed vertically
	2630 0132	Connect Direct Fixing Plate (Akusto Wall C)	100	For direct fixing of Akusto Wall C panels when they are installed horizontally

*Connect Edge Sealant is available in all standard colors. Please contact your local Sales Representative or call 800-233-8990.

Physical Data

MATERIAL

Fiberglass

FLAME SPREAD/SMOKE DEV. Per ASTM E84 — CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

(Class A per ASTM E1264)

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Washable with mild detergent.

WARRANTY

10-year Ecophon Warranty.

Full warranty information can

be found at certainteed.com/warranty.



CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM
20 Moores Road, Malvern, PA 19355 800-233-8990 certainteed.com