

# Gyptone® Big™ Curve

## GYPSUM PERFORATED PANEL

Unleash your imagination with these large-format, perforated gypsum boards.

### Features & Benefits

- Adaptable acoustics and design possibilities to surpass your imagination
- Available in three perforation patterns for screw attachment to walls and ceilings
- Can be curved to a min. 10-ft radius (dry bend) and min. 5-ft radius (wet bend)
- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Tapered edges on long sides only for easy finishing
- Proprietary Saint-Gobain formaldehyde scavenging performance (inherent to all Gyptone products)

### Attributes



EMISSION  
COMPLIANT  
CERTIFIED



RECYCLED  
CONTENT

## LEED® v4

### RECYCLED CONTENT

up to 85%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials

LEED® is a registered trademark of the U.S. Green Building Council.

### CERTIFICATIONS & PRODUCT DECLARATIONS



HPD AVAILABLE

# Gyptone® Big™ Curve


## GYPSUM PERFORATED PANEL


| Gyptone® Big™ Curve | DIMENSIONS<br>MM (≈IN.)                   | NRC*                         | CAC* | HOLE SIZE<br>(MM) | PERFORATED<br>AREA | RECYCLED<br>CONTENT | MIN PIECES/<br>PALLET | SQ. M (FT.)/<br>PIECE | MIN WEIGHT/<br>PALLET (LBS.) |
|---------------------|---|------------------------------|------|-------------------|--------------------|---------------------|-----------------------|-----------------------|------------------------------|
| Line 6              |   |                              |      |                   |                    |                     |                       |                       |                              |
| 5200809688          | 1200 x 2400 x 6.5<br>(≈47.2 x 94.5 x 1/4) | Ceiling: 0.60<br>Wall: 0.65† | —    | 6 x 80            | 13%                | 85%                 | 1                     | 3<br>(≈31)            | 35                           |
| Quattro 41          |   |                              |      |                   |                    |                     |                       |                       |                              |
| 5200609695          | 1200 x 2400 x 6.5<br>(≈47.2 x 94.5 x 1/4) | Ceiling: 0.70<br>Wall: 0.80† | —    | 12                | 16%                | 85%                 | 45                    | 3<br>(≈31)            | 35                           |
| Sixto 63            |   |                              |      |                   |                    |                     |                       |                       |                              |
| 5200609700          | 1200 x 2400 x 6.5<br>(≈47.2 x 94.5 x 1/4) | Ceiling: 0.65<br>Wall: 0.70† | —    | 12                | 15%                | 85%                 | 45                    | 3<br>(≈31)            | 35                           |

\*NRC value when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) as an overlay above the installed panel.

†NRC value when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) in wall cavity

## Accessories

| GYPTONE BIG CURVE ACCESSORIES   |            | PRODUCT NAME | PIECES/<br>CARTON | USE  |
|---|------------|--------------|-------------------|--|
|    | 5200412213 | C-Channel    | 12                | For use in framing the perimeter of the wall structure in a Gyptone BIG or Gyptone BIG Curve wall application    |
|   | 5200412216 | Z-Channel    | 12                | For use in framing horizontally across the wall structure in a Gyptone BIG or Gyptone BIG Curve wall application |
|  | 5200609148 | QSC 25 Screw | 1000              | For use when attaching Gyptone BIG Curve to metal framing in perforated area                                     |

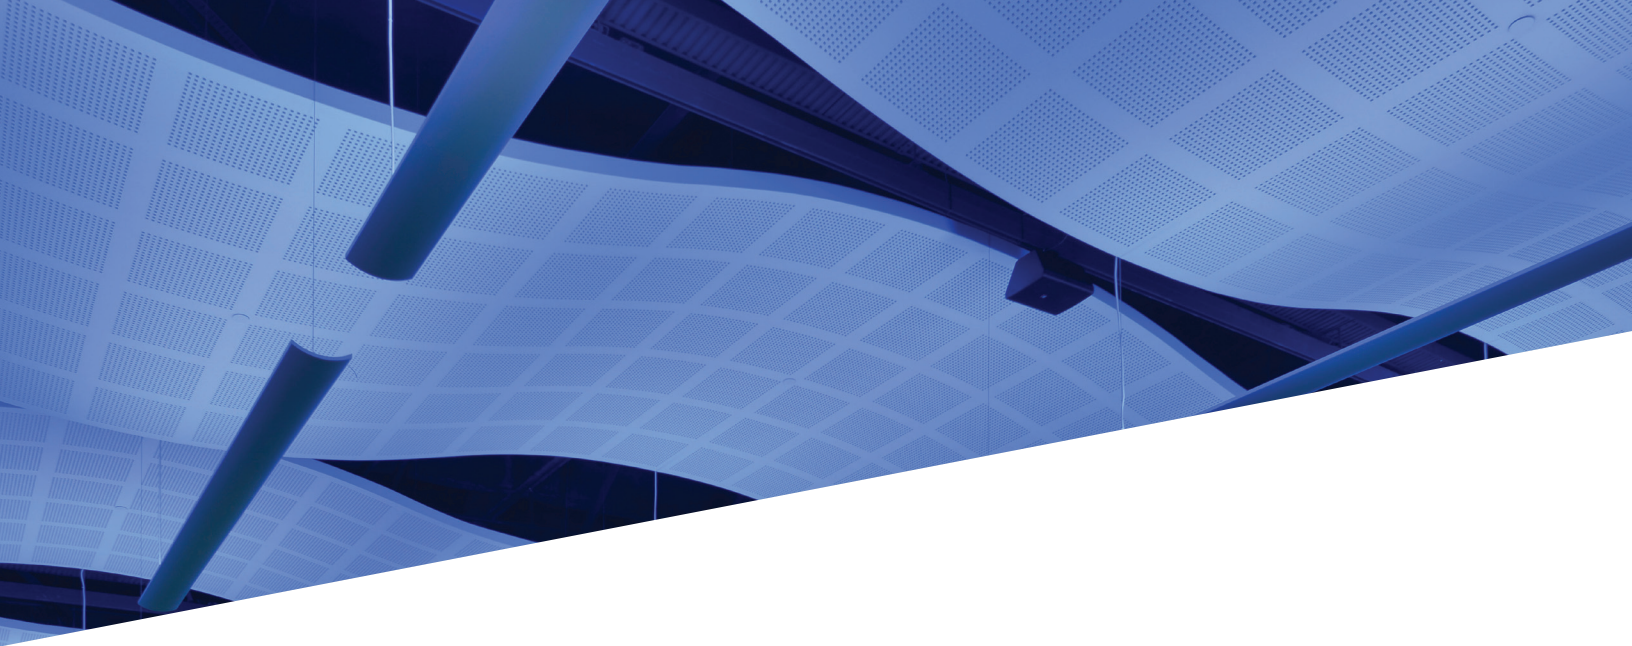

Line 6



Quattro 41



Sixto 63

## Physical Data

### MATERIAL

Gypsum

### FLAME SPREAD/SMOKE DEV.

Per ASTM E84 — CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

(Class A per ASTM E1264)

### ASTM E1264 CLASSIFICATION

ASTM E1264-22: Type XX, Pattern A G

ASTM E1264-23: Type G, Form G1, Pattern A G

### VOC EMISSIONS

Independently certified compliant  
with California Department of Public Health  
CDPH/EHLB/Standard Method Version 1.2, 2017.



## CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM  
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com](http://certainteed.com)