




**Installation Methods:** Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Colorways

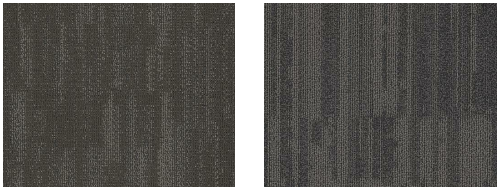

3589 Warm

3590 Cool

Product Specifications

|                     |                                                                                                                                                                                                                   |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction        | Patterned Loop                                                                                                                                                                                                    |
| Backing             | Nexus® Modular                                                                                                                                                                                                    |
| Dye Method          | Solution Dyed                                                                                                                                                                                                     |
| Fiber Type          | Encore® SD Ultima® (with recycled content)                                                                                                                                                                        |
| Face Weight         | 22 oz./sy (746 grams/m2)                                                                                                                                                                                          |
| Pile Density        | 7818 oz./y3 (289.90 kg/m3)                                                                                                                                                                                        |
| Pattern Repeat      | N/A                                                                                                                                                                                                               |
| Gauge               | 1/12 (4.72 rows/cm)                                                                                                                                                                                               |
| Stitches Per Inch   | 10 stitches/in (3.94 stitches/cm)                                                                                                                                                                                 |
| Standard Size       | 18" x 36" approx. (45.72cm x 91.44cm)                                                                                                                                                                             |
| Standard Adhesive   | Commercialon Premium Modular Adhesive                                                                                                                                                                             |
| Optional Adhesive   | TileTabs                                                                                                                                                                                                          |
| Standard Warranties | <b>Nexus Modular</b><br><b>Commercialon Adhesive for Modular Carpet &amp; LVT</b><br><b>Encore® SD Ultima Fiber</b>                                                                                               |
| Optional Warranties | <b>Nexus Cushion Modular</b><br><b>Tile Tabs</b><br><b>Nexus Cushion Adhesive</b><br><b>Commercialon High Moisture Adhesive for Modular Carpet and LVT</b><br><b>Nexus FC Cushion</b><br><b>Encore® 100 Fiber</b> |

Special Technologies

|                        |          |
|------------------------|----------|
| ProSept® Antimicrobial | Optional |
| ProTex® Soil Release   | Standard |
| Sentir® Odor-Blocker   | Optional |

Environmental Specifications & Tests

|                        |                                    |
|------------------------|------------------------------------|
| NSF 140:               | Gold Certified                     |
| Indoor Air Quality     | GLP9716                            |
| Total Recycled Content | 46.65%                             |
| Radiant Panel          | Class 1                            |
| Smoke Density          | Less then 450 flaming (ASTM E 662) |
| Static Test            | Less then 3 kv (AATCC-134)         |
| ADA Compliance         | Compliant For Accessible Routes    |
| Pill Test              | Yes                                |
| Lightfastness          | Yes                                |