

Rain Shower Round 12" - 2.5 GPM

FEATURES

- Single Function, contemporary-design round showerhead
- Balanced Comfort Wave® technology with wide coverage rinse & wash
- 12" (300 mm) diameter spray face
- Maximum flow rate of 2.5 gpm (9.5 lpm)
- Rubber nozzles to prevent lime scale build up
- Includes matching escutcheon
- Shower arm sold separately

COMPATIBLE COMPONENT *(Sold Separately)*

TBW07025U: Rain Shower Arm Wall Mount 16"
 TS110MC6: Rain Shower Arm Ceiling Mount 6"



COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel

Made to Order

- #PN Polished Nickel
- #PFG Polished French Gold
- #PBR Polished Bronze
- #MBL Matte Black

PRODUCT SPECIFICATION

Product shall be TOTO Model TBW07003U1#____.
 Product shall have comfort wave. Product shall have a maximum flow rate of 2.5 gpm (9.5 lpm). Product shall have a single spray. Product shall have 12" (300mm) diameter spray face. Product shall have rubber nozzles to prevent lime scale build up. Product shall include matching escutcheon. Product shower arm sold separately.

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, DoE, and others
- Complies with CA Prop 65 warning requirements



Please note the following components are sold separately



TBW07025U: Rain Shower Arm Wall-Mount, 16"




TS110MC6: Rain Shower Arm Ceiling Mount 6"

TBW07003U1


Rain Shower Round 12" - 2.5 GPM

SPECIFICATIONS

Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Material	Brass
Maximum Flow Rate	2.5gpm (9.5lpm)
Shipping Dimensions	17-15/16" L x 14-7/16" W x 5-1/6" H
Shipping Weight	9 lbs

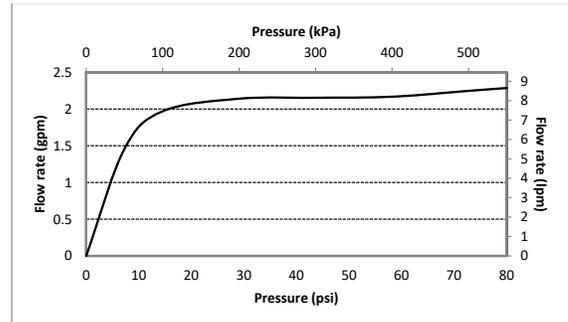

DIMENSIONS

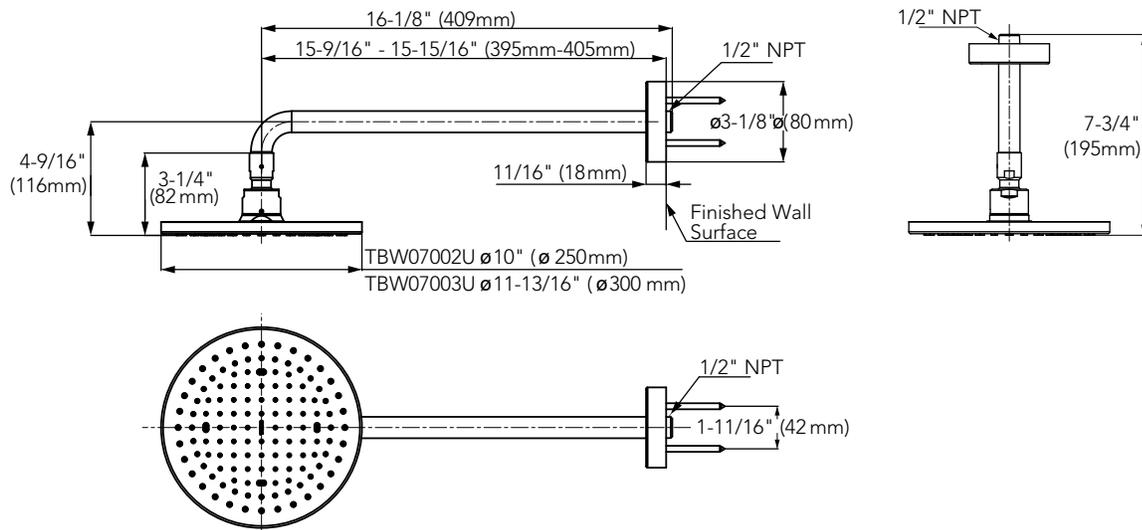

Note: The unit of above dimension is inch (mm).

Note: Shower arm and mounting bracket are not included.