

### 1. PROPRIETARY PRODUCT/MANUFACTURER

1.1. **Proprietary Product:** Resilient Vinyl Stair Nosings

1.2. **Manufacturer:**

Tarkett North America                      Phone:     (800) 899-8916  
30000 Aurora Rd.  
Solon, Ohio 44139  
Web: [www.tarkett.com](http://www.tarkett.com)

1.3. **Proprietary Product Description:**

1.3.1. **Construction:** Tarkett Vinyl Stair Nosings are manufactured from a homogeneous composition of polyvinyl chloride (PVC), high quality additives, and colorants Tarkett Vinyl Stair Nosings are designed for interior applications only and not recommended for commercial kitchen environments.

1.3.2. **Styles, Physical Characteristics, & Packaging:**

(See chart on page 2)

### 2. PRODUCT PERFORMANCE AND TECHNICAL DATA

2.1. **Meets ASTM F-2169** performance standards for Resilient Stair Treads, Type TV, Class 2

2.2. **Abrasion Resistance:** ASTM D 3389, < 1.00 gram weight loss

2.3. **Slip Resistance:** ASTM D 2047 - Exceeds Federal Standards and ADA recommendations of .6 for flat surfaces

2.4. **Fire Resistance:** ASTM E 648/NFPA 253 (Critical Radiant Flux) - Class 1

### 3. INSTALLATION

3.1. See Vinyl Nosing installation instructions for complete details.

3.2. **Adhesives:**

- **Tarkett 946 Premium Contact Adhesive Coverage:**  
Non-porous Substrate:  
1 quart unit (0.95 liters) – 24 to 36 sq. ft.  
1 gallon unit (3.79 liters) – 144 to 215 sq. ft.
- **Tarkett 930 Two-part Epoxy Nose Caulk Coverage:**  
13.5 oz. cartridge, with #530 Caulking Gun at a ¼" diameter bead – approximately 50 linear feet.
- **Tarkett 931 Rapid Reaction Epoxy Caulk Coverage:**  
13.5 oz. cartridge, with #530 Caulking Gun at a ¼" diameter bead – approximately 50 linear feet.

### 4. AVAILABILITY AND COST

Available through authorized Tarkett distributors nationwide.

### 5. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures can be implemented. Refer to vinyl nosing maintenance instructions for complete details.

### 6. TECHNICAL SERVICES

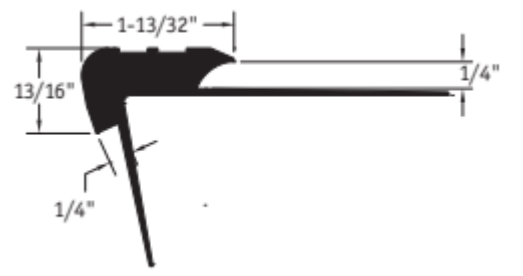
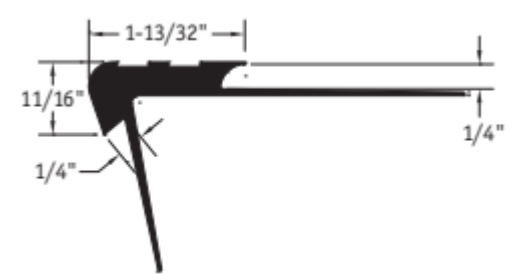
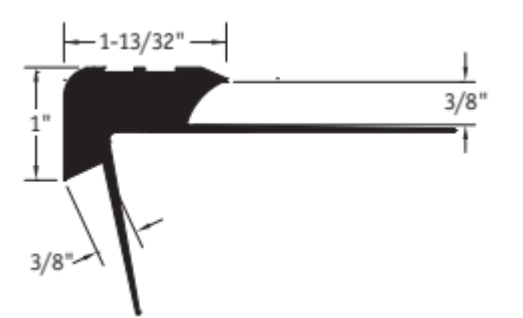
Visit us on the web at [www.tarkett.com](http://www.tarkett.com)

Contact Technical Support at (800) 899-8916 or E-mail:  
[Resilient.TechnicalSupport@Tarkett.com](mailto:Resilient.TechnicalSupport@Tarkett.com)

**Samples:** Submittal samples for verification and approval available upon request from Tarkett. Samples shall be submitted in compliance with the requirements of the contract documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project..

### 7. WARRANTY

Limited 2 year warranty. For complete details, contact Tarkett or an authorized Tarkett distributor.

Product Code	Profile	Description	Length Per Pc.	Pieces Per Ctn.	Weight Per Ctn.
SLN XX A		Slim-Line Nosing For 1/4" to 1/4" materials step and riser-carpet and resilient	12 ft.	5 pcs.	32 lbs.
SLN XX B		Slim-Line Nosing For 7/32" material on step to 1/4" material on riser-carpet and resilient	12 ft.	5 pcs.	26 lbs.
SLN XX C		Slim-Line Nosing For 3/8" to 3/8" materials step and riser-carpet and resilient	12 ft.	5 pcs.	39 lbs.

**Tarkett North America**

Technical Services Department

30000 Aurora Road

Solon, Ohio 44139

800.899.8916

info@tarkettna.com

[www.tarkett.com](http://www.tarkett.com)