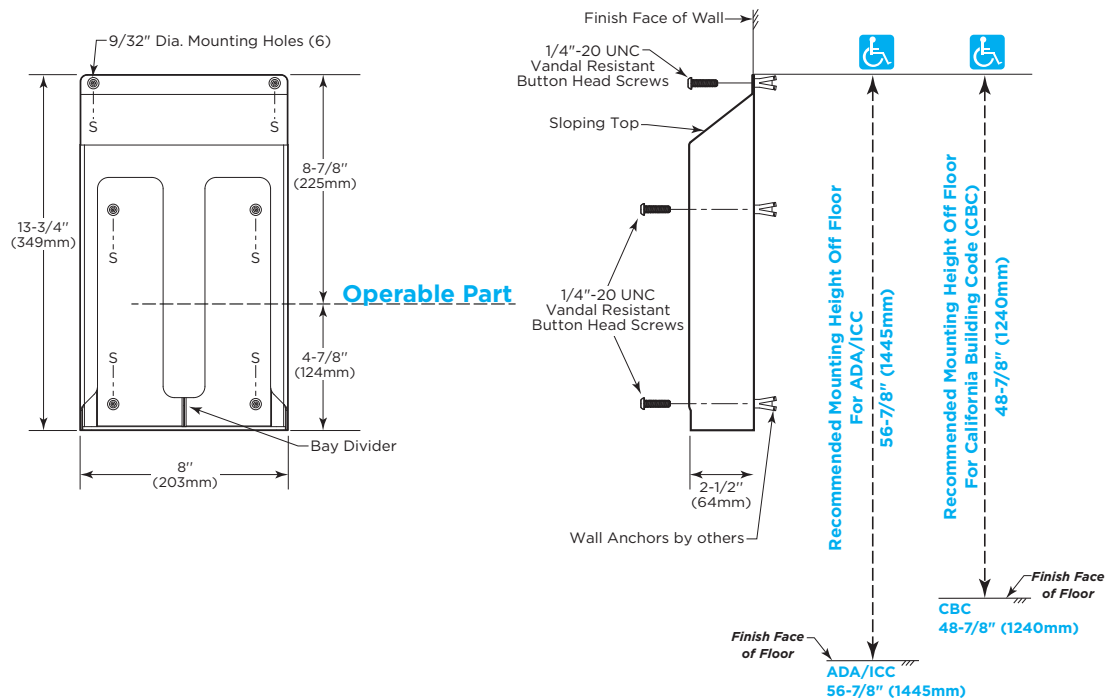


BOBRICK**Technical Data****Ligature Resistant
Vertical Bay Paper
Towel Holder****B-9881****ADA/CBC Installation Guidance**

***Operable Part:** Center of the open bays

Maximum mounting height of Operable Part:

ADA/ICC: 48" maximum above finished floor (AFF)

CBC: 40" maximum above finished floor (AFF)

*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

MATERIALS:

Paper Holder is fabricated from 16-gauge, type 304 stainless steel with all exposed surfaces powder coated white. Furnished with one (1) 5/32" hex bit for center reject pin and six (6) 1/4"-20 UNC tamper resistant screws for use with wall anchors (provided by others).

OPERATION:

Units dispenses C-fold paper towels 3-1/8" to 3-5/8" (79-97mm). Capacity: 200 C-fold paper towels per bay. The sloping top and open bays discourage use as a point of ligature. The open bay design eliminates the need for a lock and has no moving parts that can be vandalized.

INSTALLATION:

Ensure adequate in-wall backing exists. Use mounting holes in fixture as a template to locate mounting holes and install wall anchors. Fasten fixture to wall using 1/4"-20 screws (provided).

SPECIFICATION:

Ligature Resistant Vertical Bay Paper Towel Holder shall be type 304 stainless steel; exposed surfaces shall be powder coated white. Unit shall be capable of dispensing a total of 400 (200 per bay) C-fold paper towels measuring 3-1/8" to 3-5/8" (79 to 97mm) wide. Open bay design deters use as a ligature point.

Ligature Resistant Vertical Bay Paper Towel Holder shall be Model B-9881 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.