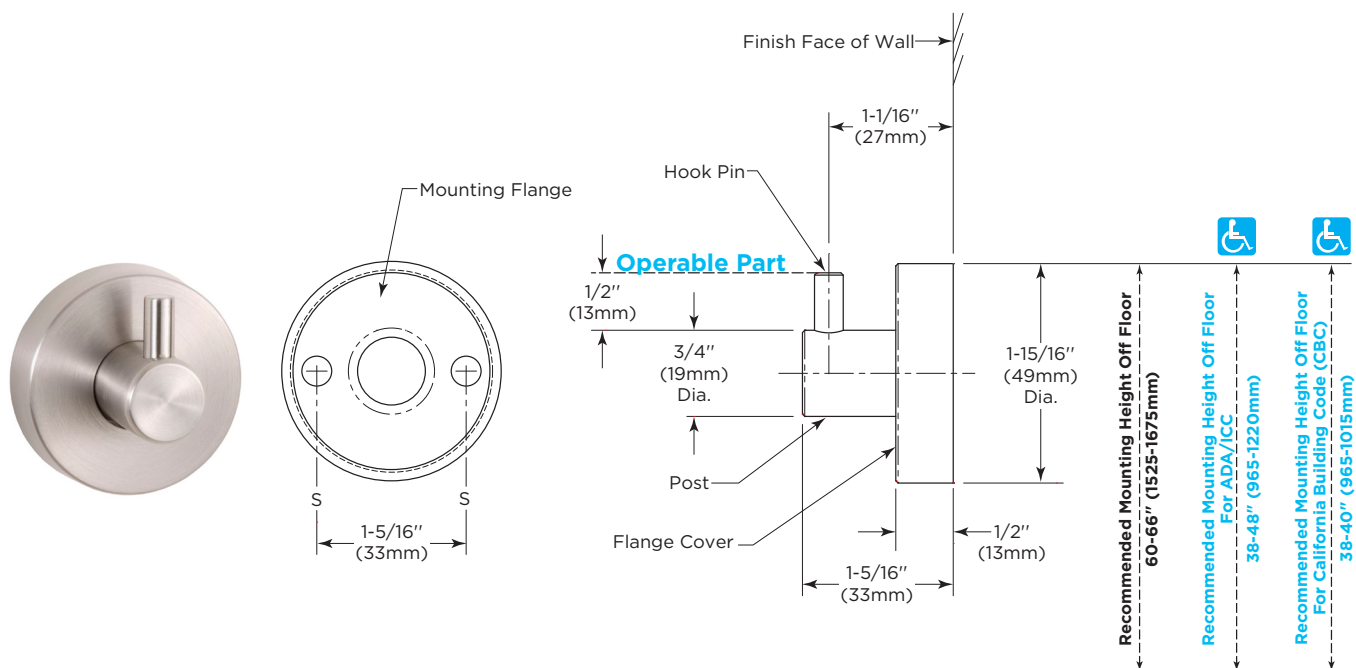


Coat Hook

B-542
B-5426

Specify Model Required: ☐ B-542 Satin-finish stainless steel
☐ B-5426 Bright Polished stainless steel

**ADA/ICC/CBC Installation Guidance**

***Operable Part:** Top of hook pin.

Maximum mounting height of Operable Part:

ADA/ICC: 48" above finished floor (AFF)

CBC: 40" above finished floor (AFF)

*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

MATERIAL:

Post — 18-8, type-304, 3/4" (19mm) diameter, solid stainless steel rod. Post and Concealed Mounting Threaded Flange are machined as one piece.

Hook Pin — 18-8, type-304, 1/4" (6.4mm) diameter, solid stainless steel rod with thread to screw into Post.

Concealed Mounting Threaded Flange — 18-8, type-304, 7/32" (5.6mm) thick, stainless steel plate with thread on outside edge for fastening cover. 1-13/16" (46mm) outside diameter with two holes for attachment to wall.

Threaded Flange Cover — 18-8, type-304, 17-gauge (1.4mm), machined stainless steel. 1-15/16" (49mm) diameter 1/2" (13mm) deep. Cover fastens over mounting flange to conceal mounting screws.

continued . . .

INSTALLATION:

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws (not furnished). For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws (not furnished), or provide 1/8" (3mm) toggle bolts or expansion bolts.

For partitions with particle-board or other solid core, secure with sheet-metal screws (not furnished), or provide through-bolts, nuts, and washers. For hollow-core metal partitions, provide solid backing into which the sheet-metal screws (not furnished) can be secured.

SPECIFICATION:

Coat Hook shall be type-304 stainless steel with _____ (insert one satin finish or bright polished) finish. Coat Hook shall have 3/4" (19mm) diameter Post with 1/4" (6.4mm) diameter Hook Pin. Concealed mounting flange shall be 7/32" (5.6mm) thick stainless steel plate, 1-13/16" (46mm) outside diameter and equipped with two screw holes for attachment and thread on outside edge to fasten cover. Threaded flange cover shall be 17-gauge (1.4mm) stainless steel, 1-15/16" (49mm) diameter and shall fasten over mounting flange to conceal mounting screws. Post and mounting flange are to be machined as one piece.

Coat Hook shall be Model _____ (insert Model number) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.