



Top Specification:

Power unit fits with tops of this size:

- Range of top width: 102" - 114"
- Number of bases: 2 Bases
- 10' Power infeed cord provides sufficient length to route through end base
- Top power one location cutout code CG1C



Ellora Double 9PCG82C corded unit

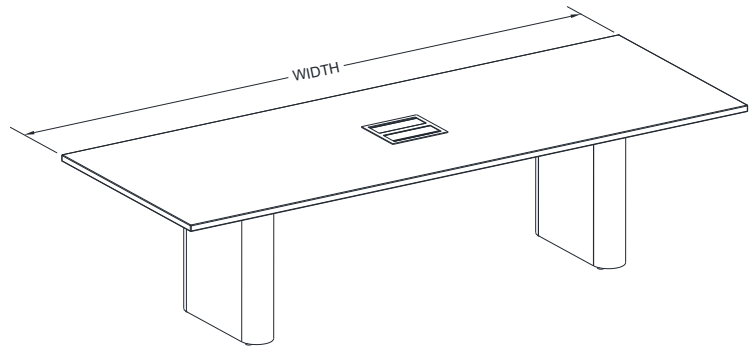


Content: item (quantity)

- Ellora Double power units (1)
- Cable mounting clips (10)
- #6 x 5/8" mounting screws (10)



Ellora Double Power Unit






Cable Mounting Clip




Mounting Screw

Tools Required:


- #2 Phillips Head  
- Drill 

Step 1 - Ellora Double installation to top


1. Attach 1 clip, at each end of unit base with short leg of clip sliding into recess.
2. Route Ellora Double unit connection cords through top cutout as power unit is lowered into opening. As unit is pushed into the opening the clips will grip the top material wall.
3. Select adapter or blank cover for unit open window.
A 12-pack data adapter kit has been provided with unit to support a variety of connection options.

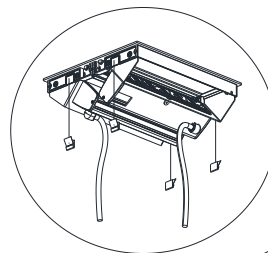

Detail 1

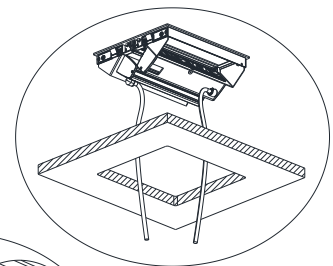

Detail 2

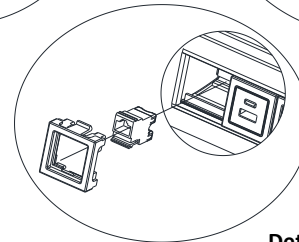

Detail 3

Ellora Double - Power Connection


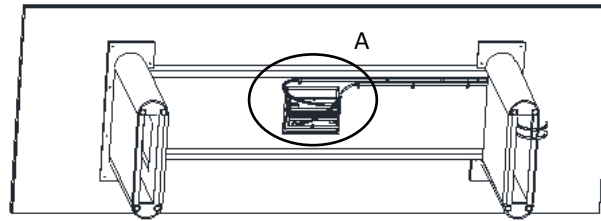


Table Diagram

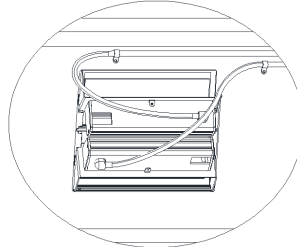


Detail A

Securing Cords

1. Install cable mounting clips along cords spacing no more than 18" apart with #6 x 5/8" mounting screws to secure cords under side of top.


Cable Mounting Clips

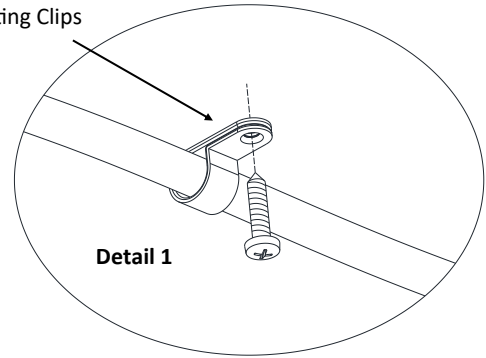


Detail 1

Power Plug Connection

1. Use cable clips to route the cord through the channel to the floor outlet. Secure excess cord in the vertical channel or to the table with clips.
2. Plug power cords into building power source and check unit outlets to verify power.

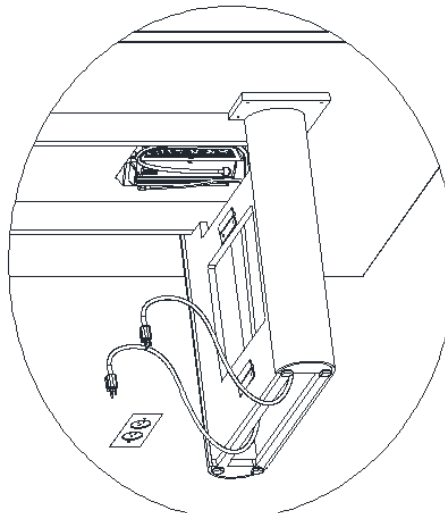

Detail 1

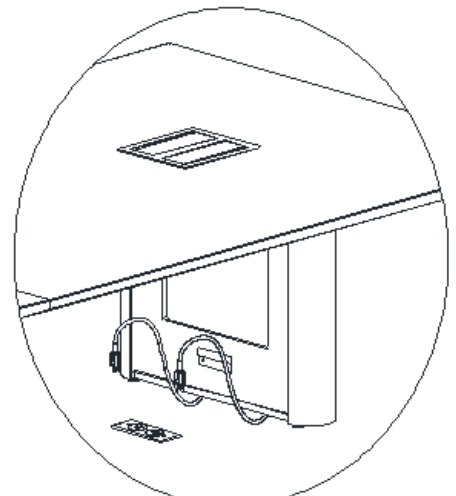

Detail 2