


Top Specification:

Power unit fits with tops of this size:

- Range of top width: 84" - 114"
- Number of bases: 2 Bases
- 10' Power infeed cord provides sufficient length to route through end base to power source.
- Top power two location cutout code CD1C




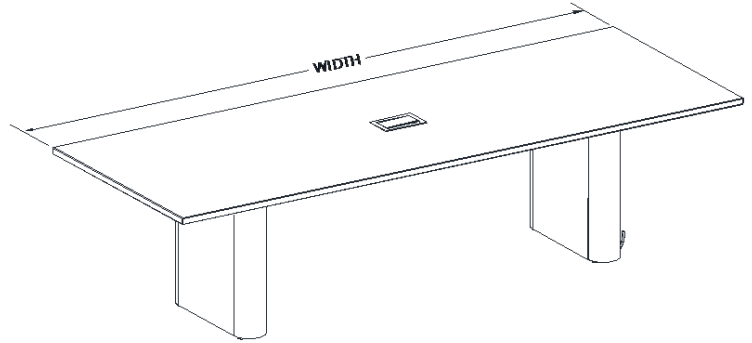


Ellora 9PCD21C corded unit

Content: item (quantity)


- Ellora power unit (1)
- Cable mounting clips (10)
- #6 x 5/8" mounting screws (10)

Tools Required:

- #2 Phillips Head  
- Drill 



Ellora Power Unit




Cable Mounting Clip




Mounting Screw

Step 1 - Ellora installation to top


1. Attach 1 clip, at each end of unit base with short leg of clip sliding into recess.
2. Route Ellora unit connection cords through top cutouts as power unit is lowered into opening. As unit is pushed into the opening the clips will grip the top material wall.
3. Select adapter or blank cover for unit open window. The 12-pack data adapter kit has been provided with unit to support a variety of connection options.

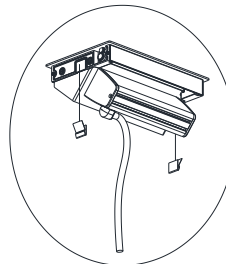

Detail 1

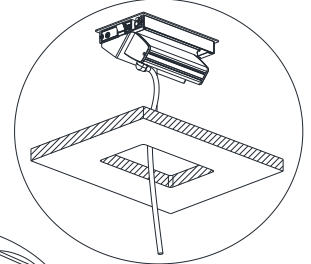

Detail 2

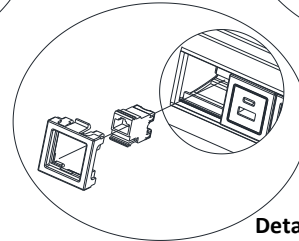


Detail 3

Securing Connections and Cables

1. Install cable mounting clips along cord spacing no more than 18" apart with #6 x 5/8" mounting screws to secure to under side of top.

Cable Mounting Clips

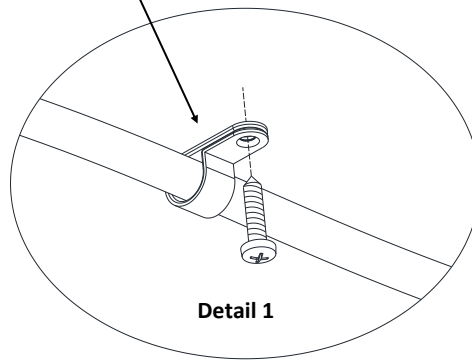

Power Cord Connection

1. Use cable clips to route the cord through the channel to the floor outlet. Secure excess cord in the vertical channel or to the table with clips.
2. Plug power cord into building power source and check unit outlets to verify power.

