



## Top Specification:

Power unit fits with tops of this size:

- Range of top width: 198" - 240"
- Number of bases: 4 Bases
- 10' Power infeed cord provides sufficient length to route through end or mid base.
- Top power two location cutout code CD2E




Ellora 9PCD21K2EDC Pattern 2-unit kit

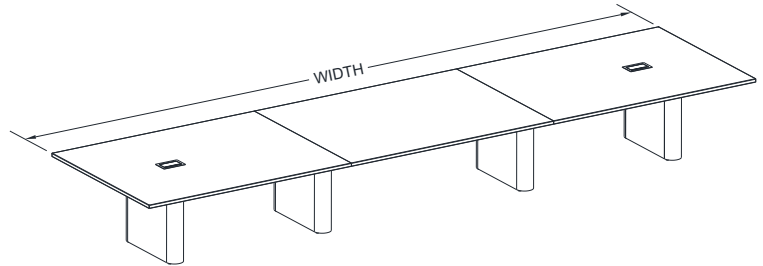


## Kit Content: item (quantity)


- Ellora power units (2)
- 66" - Jumper (3)
- Power infeed - 15 amp plug (1)
- Splitter - grey (3)
- Splitter—white (1)
- Cable mounting clips (20)
- #6 x 5/8" mounting screws (30)




Ellora Power Unit




Jumper



Power Infeed



Splitter



Cable Mounting Clip




Mounting Screw

## Tools Required:


- #2 Phillips Head 
- Drill 

## Connection Type

NOTE: Splitter must be used to connect cords

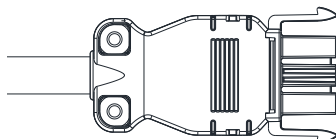


Male Connection

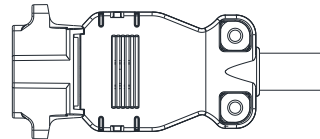


Female Connection

## Splitter

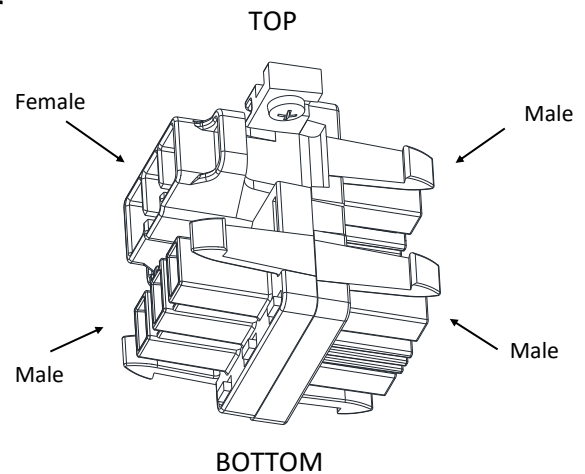


## Step 1 - Ellora installation to top


1. Attach 1 clip, at each end of unit base with short leg of clip sliding into recess.
2. Route Ellora unit connection cords through top cutouts as power unit is lowered into opening. As unit is pushed into the opening the clips will grip the top material wall.
3. Select adapter or blank cover for unit open window.  
The 12-pack data adapter kit has been provided with unit to support a variety of connection options.

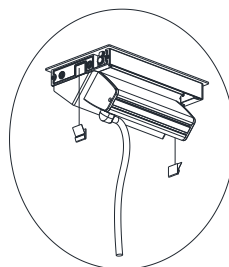

Detail 1

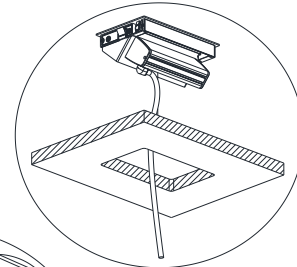

Detail 2

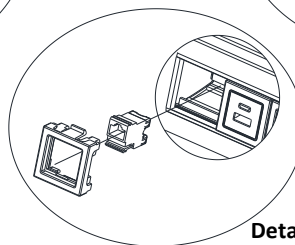

Detail 3

## Ellora - Power Connection - End Location Infeed



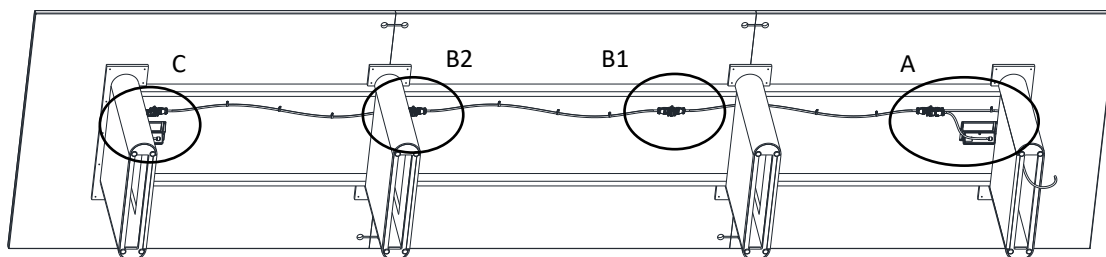



Table Diagram

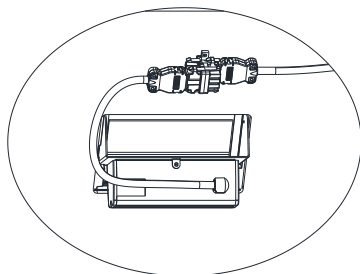

Detail C

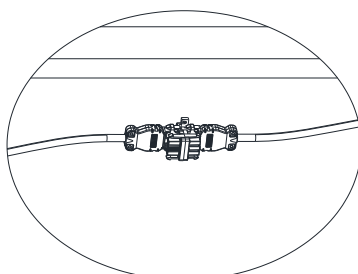

Detail B

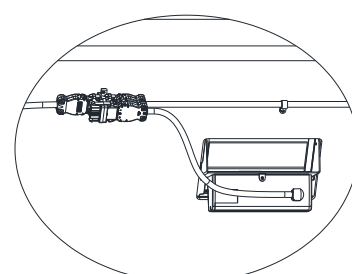


Detail A

## Step 2 - Connecting Ellora unit to power—End Location Infeed

1. Insert **power infeed** male connector into **splitter** top female connection.
2. Insert **Ellora unit** female connector onto splitter male connection below infeed.


Note: To connect first Ellora unit to second Ellora unit insert 66" jumper female connector onto splitter top male connection.

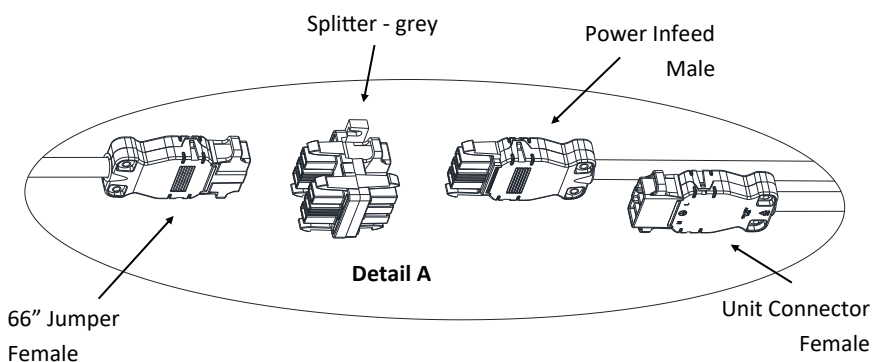

### Step 3– Connecting multiple Ellora units together

1. Insert first 66" jumper male connector into splitter top female connection.
2. Insert second 66" jumper female connector onto splitter top male connection.


Detail B1

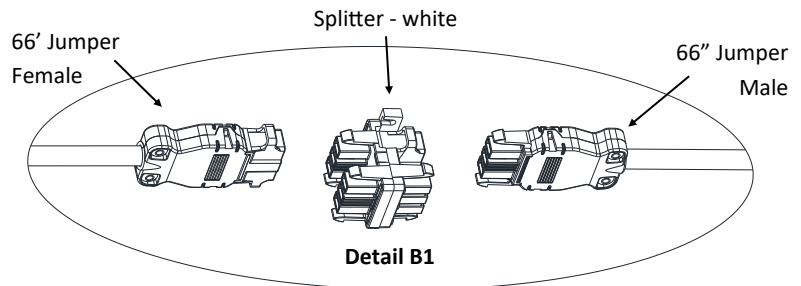

### Step 4– Connecting multiple Ellora units together

1. Insert 66" jumper male connector into splitter top female connection.
2. Insert unit female connector onto splitter bottom male connection opposite jumper.


Detail B2

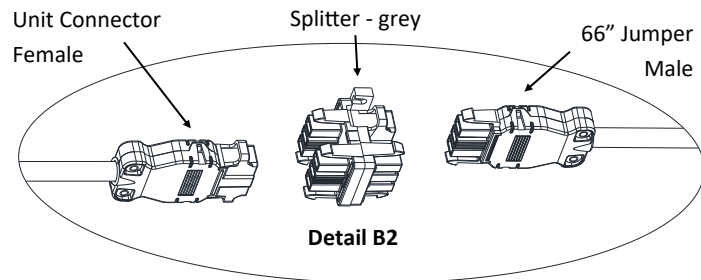

### Step 5– Connecting multiple Ellora units together


1. Insert 66" jumper male connector into splitter top female connection.
2. Insert unit female connector onto splitter bottom male connection opposite jumper.

Detail C

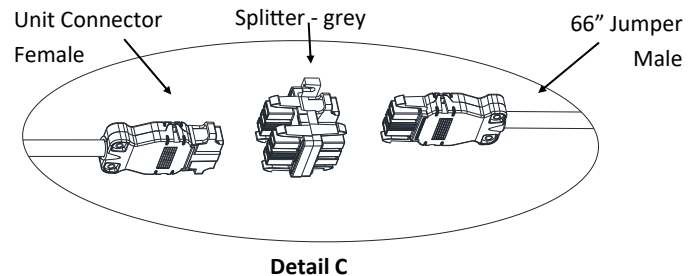


### Securing Connections and Cables

2. Position splitters to allow cables to route under top freely and install (2) #6 x 5/8" mounting screws to secure, do not over tighten as could damage splitter.
3. Install cable mounting clips along cables spacing no more than 18" apart with #6 x 5/8" mounting screws to secure unit and jumper cables.




Detail 2

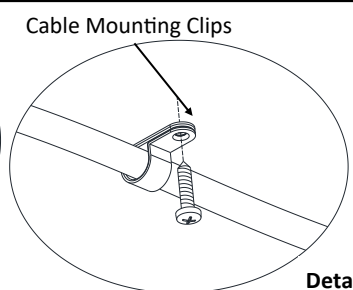


Detail 3

### Power Infeed Connection

1. Use cable clips to route the cord through the channel to the floor outlet. Secure excess cord in the vertical channel or to the table with clips.
2. Plug power infeed into building power source and check unit outlets to verify power.

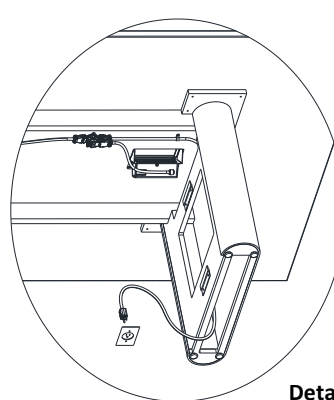

Detail 1

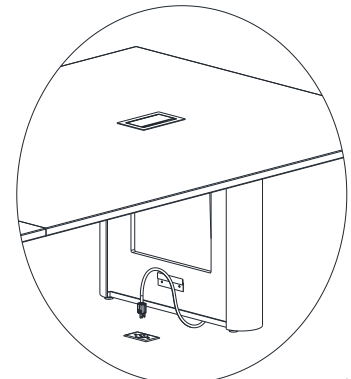

Detail 2