



## Top Specification:

Power unit fits with tops of this size:

- Range of top width: 102"- 114"
- Number of bases: 2 Bases
- 9' Power infeed cords provide sufficient length to route through end base.
- Top power one location cutout code CH1C




Oasis 9PCH62C or 9PCH8C corded units

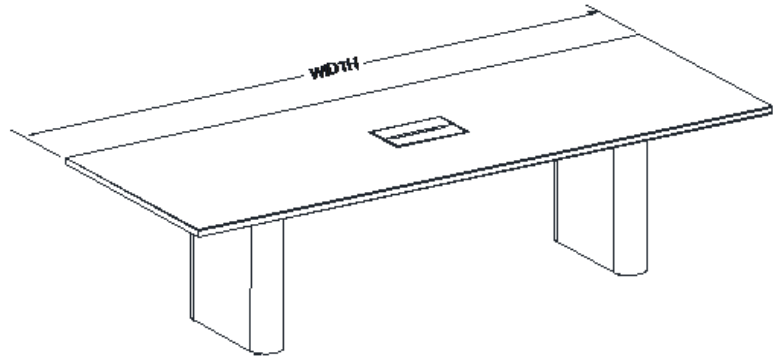


## Content: item (quantity)

- Oasis power unit with lift door trim (1)
- Cable mounting clips (10)
- #6 x 5/8" mounting screws (10)



Oasis Power Unit



Cable Mounting Clip




Mounting Screw

## Tools Required:


- #2 Phillips Head  
- Drill 

## Step 1 - Oasis installation to top

1. Position Oasis unit under top cut out and align with opening. Install screws to secure to under side of top.
2. Position lift door trim in cutout on face of top and install screws to secure.

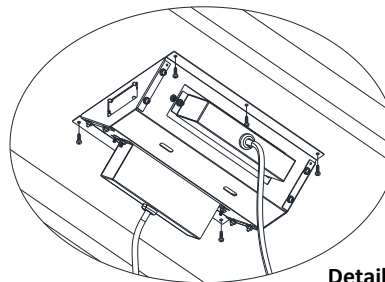

Detail 1

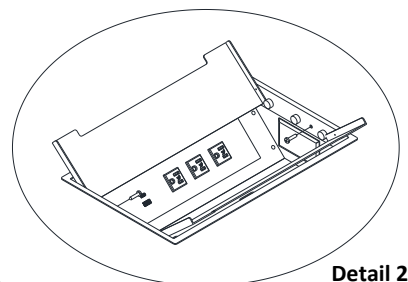


Detail 2

---

## Securing Cords

1. Install cable mounting clips along cords spacing no more than 18" apart with #6 x 5/8" mounting screws to secure cords.

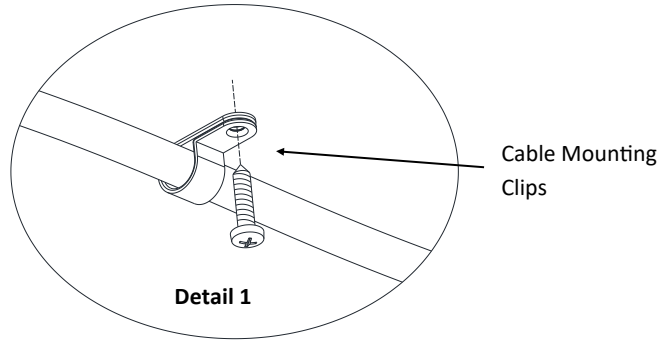

---

## Power Cord Connection

1. Install cable mounting clips to route cord to wire management or base to channel to floor power source outlet. Route power infeed cord through channel. Excess cord can be managed in vertical channel or secured to table with mounting clips.
2. Plug power infeed into building power source and check unit outlets to verify power.

