



Top Specification:

Power unit fits with tops of this size:


- Range of top width: 198" - 240"
- Number of bases: 4 Bases
- 9' Power infeed cord provides sufficient length to route through end or mid base.
- Top power one location cutout code CH1C

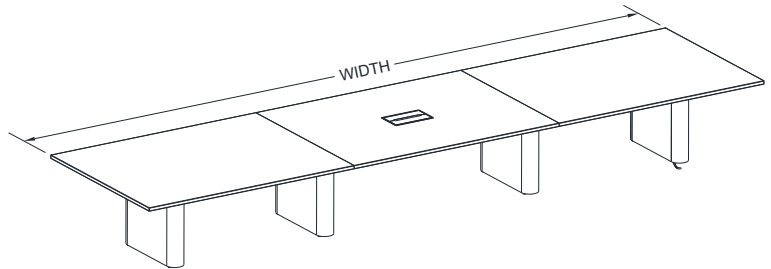


Oasis 9PCH62K1C or 9PCH8K1C Purl 1-unit kit

Kit Content: item (quantity)


- Oasis power unit with lift door trim (1)
- Power infeed - 15 amp plug (1)
- Splitter (1)
- Cable mounting clips (10)
- #6 x 5/8" mounting screws (30)



Oasis Power Unit







Power Infeed



Splitter

Tools Required:

- #2 Phillips Head  
- Drill 




Cable Mounting Clip




Mounting Screw

Connection Type

NOTE: Splitter must be used to connect cords




Male Connection

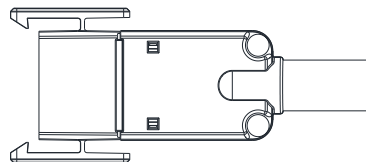


Female Connection

Splitter

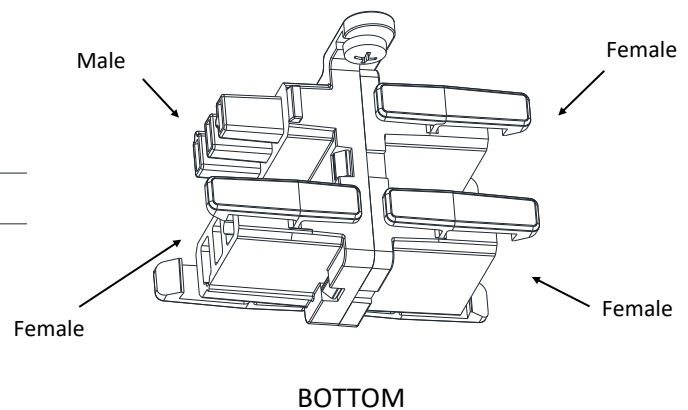


Step 1 - Oasis installation to top

1. Position Oasis unit under top cut out and align with opening. Install screws to secure to under side of top.
2. Position lift door trim in cutout on face of top and install screws to secure.

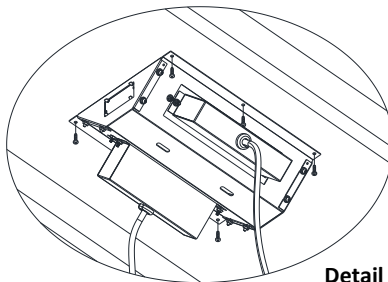

Detail 1

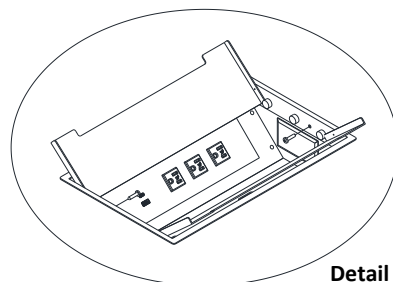

Detail 2

Oasis - Power Connection - End or Mid Location Infeed


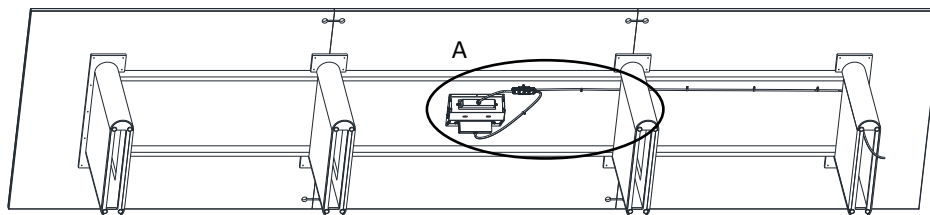


Table Diagram

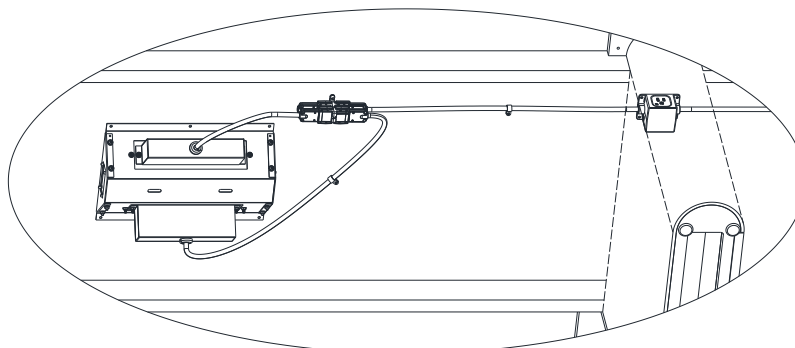


Detail A

Step 2 - Connecting Oasis unit to power

1. Insert power infeed female connector onto splitter top male connection.
2. Insert unit male connectors into splitter bottom female connections.


Detail A

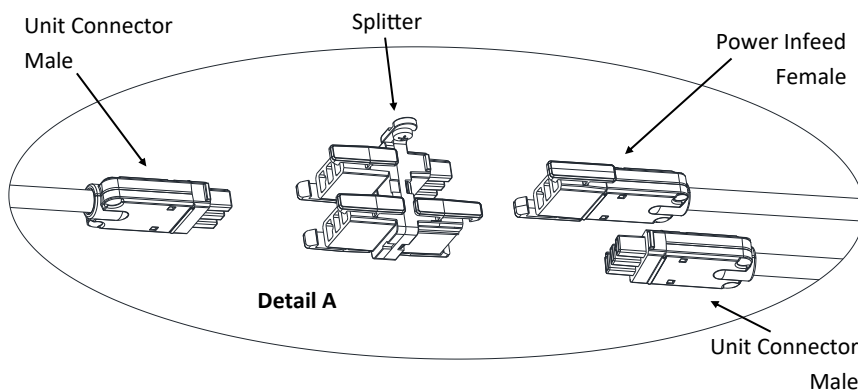

Detail A

Securing Connections and Cables

1. Position infeed FPDU box under top with access to outlet and reset. Install (4) #6 x 5/8" mounting screws to secure, do not overtighten as could damage FPDU box.
2. Position splitters to allow cables to route under top freely and install (2) #6 x 5/8" mounting screws to secure, do not over tighten as could damage splitter.
3. Install cable mounting clips along cables spacing no more than 18" apart with #6 x 5/8" mounting screws to secure cables.

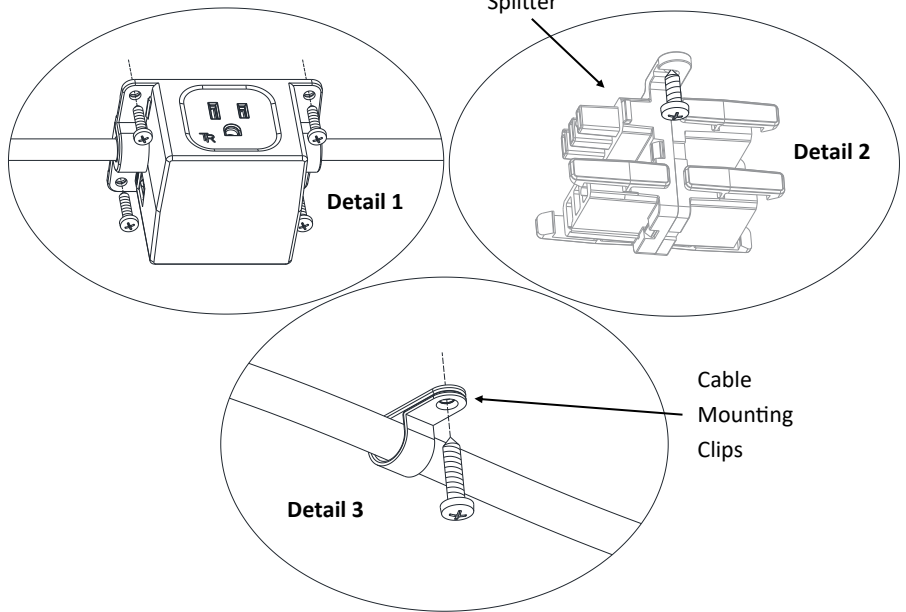

Power Infeed Connection

1. Install cable mounting clips to route cord to wire management or base to channel to floor power source outlet. Route power infeed cord through channel. Excess cord can be managed in vertical channel or secured to table with mounting clips.
2. Plug power infeed into building power source and check unit outlets to verify power.

