



Top Specification:

Power unit fits with tops of this size:

- Range of top width: 84" - 114"
- Number of bases: 2 Bases
- 10' Power infeed cord provides sufficient length to route through end base
- Top power one location cutout code CE1C




Vault Z23 9PCE21C corded unit

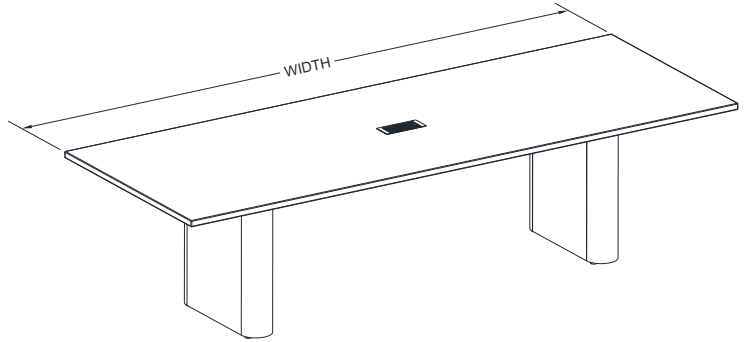


Content: item (quantity)

- Vault Z23 power unit (1)
- Clamp bracket (1)
- Bracket mounting screws (2)
- Cable mounting clips (10)
- #6 x 5/8" mounting screws (10)



Vault Z23 Unit






Clamp Bracket



Bracket Mounting Screws

Tools Required:

- #2 Phillips Head 
- Drill 




Cable Mounting Clip




Cable Mounting Screw

Step 1 - Vault Z23 installation to top

1. Route Vault Z23 unit cord through top cutout as power unit is lowered into opening. Slide clamp bracket from under unit until it latches into the side grooves of unit.
2. Install mounting bracket screws into clamp bracket threaded tabs and tighten to secure unit from under top cutout.

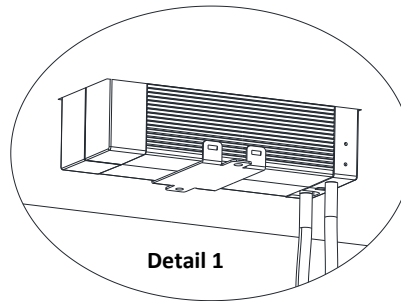


Detail 1

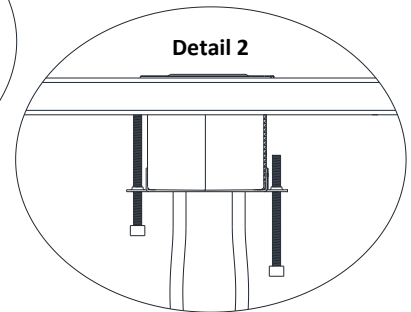


Detail 2

Vault Z23 - Power Connection - End Location Infeed

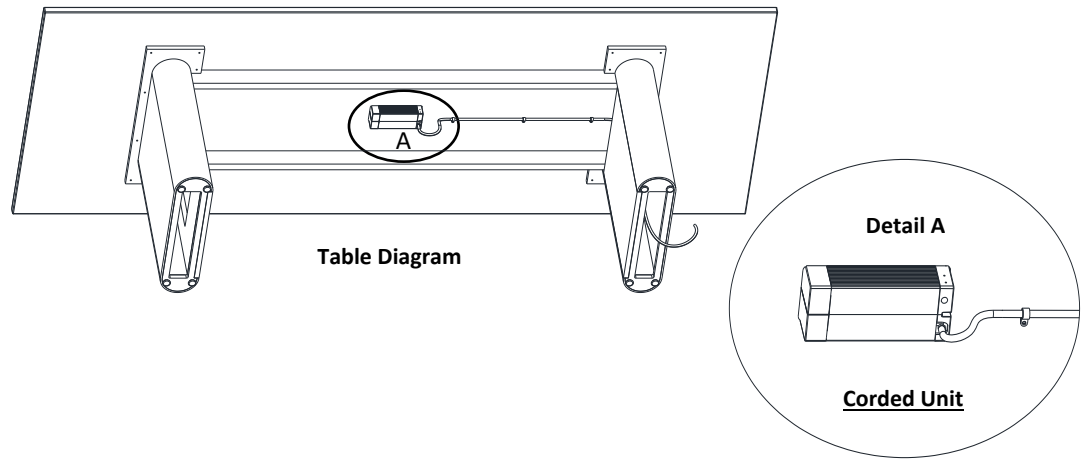

Securing Cables

1. Install cable mounting clips along cord spacing no more than 18" apart with #6 x 5/8" mounting screws to secure cord.

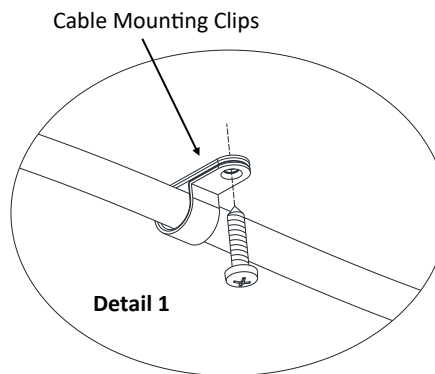

Power Infeed Connection

1. Install cable mounting clips to route cord to wire management or base to channel to floor power source outlet. Route power infeed cord through channel. Excess cord can be managed in vertical channel or secured to table with mounting clips.
2. Plug power infeed into building power source and check unit outlets to verify power.

