
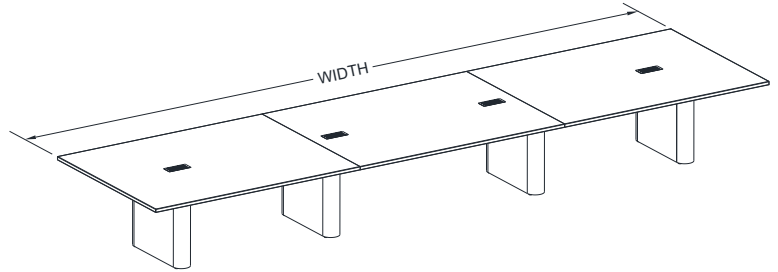


### Top Specification:

Power unit fits with tops of this size:


- Range of top width: 198" - 234"
- Number of bases: 4 Bases
- 10' Power infeed cord provides sufficient length to route through end or mid base.
- Top power four location cutout code CE4ME




Vault Z23 9PCE21K4MEDC connecting 4-unit kit

### Kit Content: item (quantity)


- Vault Z23 power starter unit (1)
- Vault Z23 power mid unit (2)
- Vault Z23 power end unit (1)
- Cable mounting clips (30)
- #6 x 5/8" mounting screws (30)




Starter Unit



Mid Unit



End Unit




Clamp Bracket

### Tools Required:

- #2 Phillips Head
- Drill



Bracket Mounting Screws




Cable Mounting Clip




Cable Mounting Screw

### Connection Type

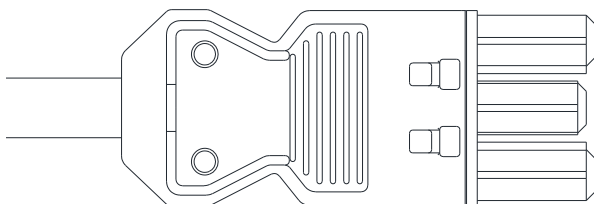



Male Connection

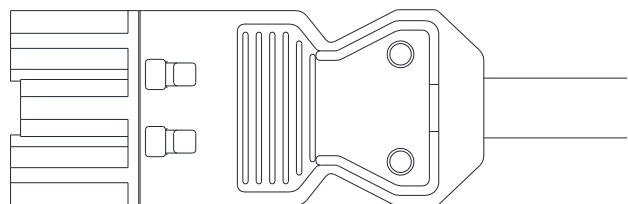






Female Connection

## Step 1 - Vault Z23 installation to top

1. Route Vault Z23 unit connection cords through top cutouts as power unit is lowered into opening. Slide clamp bracket from under unit until it latches into the side grooves of unit.
2. Install clamp mounting screws into clamp bracket threaded tabs and tighten to secure unit from under top cutout.

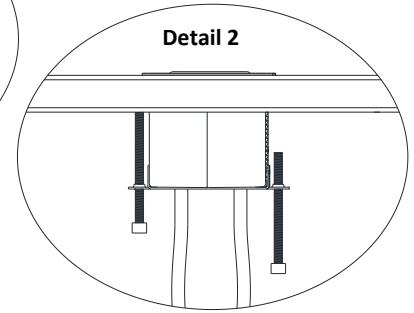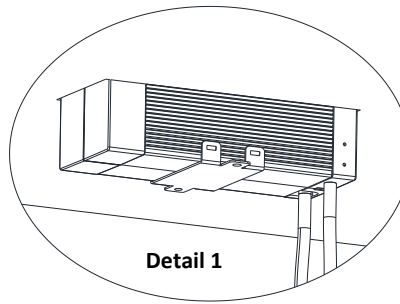


## Vault Z23 - Power Connection - End or Mid Location Infeed

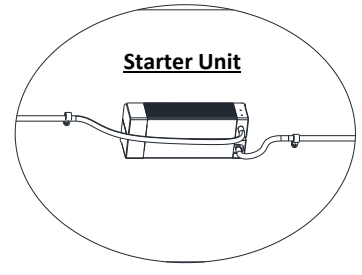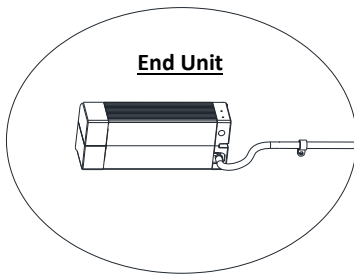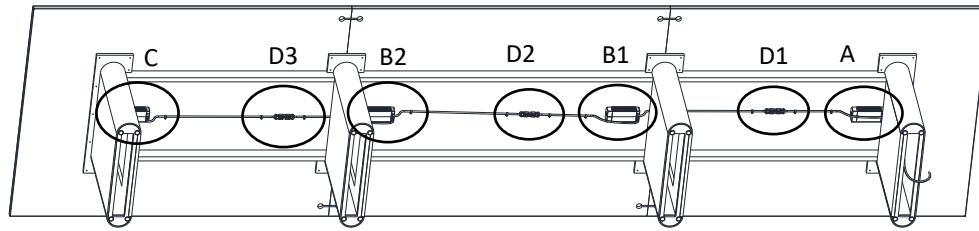


## Step 2 - Connecting Vault unit to power

1. Insert starter unit male connector into mid unit female connection. **Detail D1**
2. Insert mid unit male connector into mid unit female connection. **Detail D2**
3. Insert mid unit male connector into end unit female connection. **Detail D3**


End Unit Connector  
Female



**Detail D3**




Mid Unit Connector  
Female

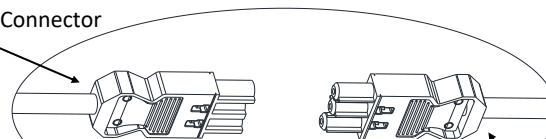

**Detail D2**

Mid Unit Connector  
Male

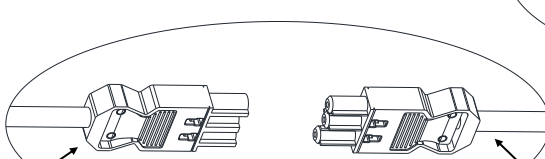

Mid Unit Connector  
Female


**Detail D1**

Starter Unit Connector  
Male

---

## Securing Cables

1. Install cable mounting clips along cables spacing no more than 18" apart with #6 x 5/8" mounting screws to secure unit and jumper cables.

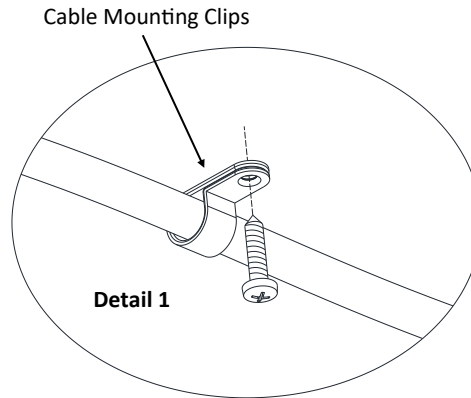

---

## Power Infeed Connection

1. Install cable mounting clips to route cord to wire management or base to channel to floor power source outlet. Route power infeed cord through channel. Excess cord can be managed in vertical channel or secured to table with mounting clips.
2. Plug power infeed into building power source and check unit outlets to verify power.

