

USG Ceilings Plus® Design Solutions - COLORTEX™ TRIMETRIX™

ACOUSTIC PANEL SOLUTIONS



Architect: Gensler
Photo: © James John Jetel

To order samples, contact your local sales representative



Downward Accessible Installation


FEATURES AND BENEFITS

- Made from 100% recycled materials.
- Fully accessible plenum at every panel location.
- Third party integration of diffusers, lights, speakers, sprinklers, wifi, etc. (independently suspended).
- Design flexibility with varying profiles and layout options.
- Available in 1/2" (12mm) thick panels.
- Varied mounting arrangements are available to respond to any installation requirements or conditions.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Tenant Improvement
- Sloped Ceilings
- New Construction
- Downward Accessible

STANDARD COLORTEX™ FINISHES

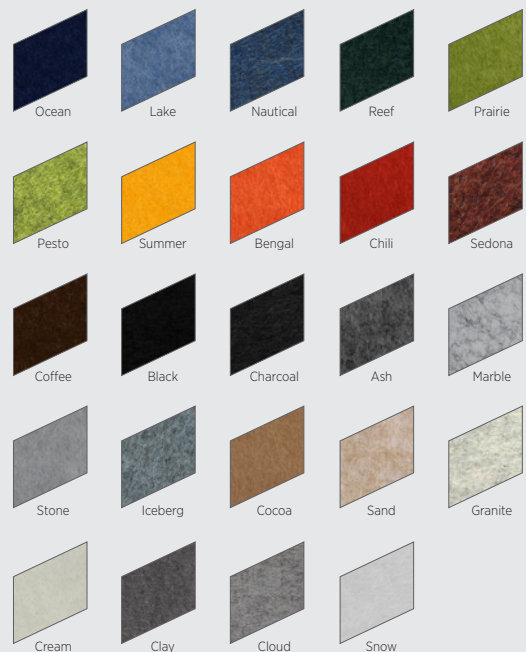

WOODGRAIN COLORTEX™ FINISHES



USG Ceilings Plus® Design Solutions - COLORTEX™ TRIMETRIX™

ACOUSTIC PANEL SOLUTIONS

ORDER SAMPLES/LITERATURE
Contact your local sales rep.

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
Contact your local sales rep.

TECHNICAL SERVICES
Contact your local sales rep.


PERFORMANCE OPTIONS

Declare. Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.


Application	Grid Options	Finish	Accessibility	Ceiling Open %	Thickness	Array-NRC¹	Perforation	Fire Class	Recycled Content	Maintenance	Weight
Interior	N/A	24 Standard Colors & 3 Wood Grains, Custom Colors Available	Full Downward	Varies	1/2" Thick (12mm)	Up to 0.85	N/A	Class A, ASTM E84 CAN/ULC S102.2	100% (hardware excluded)	See architectural specification	Varies

REVEAL OPTIONS

OPEN REVEAL

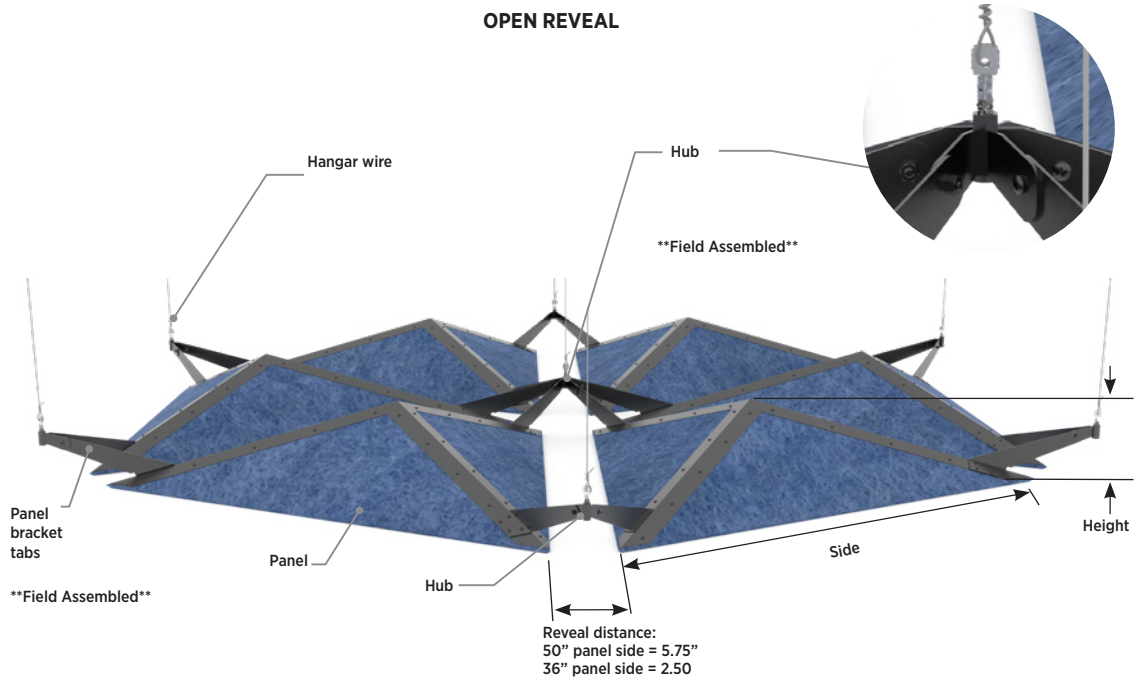

NO REVEAL

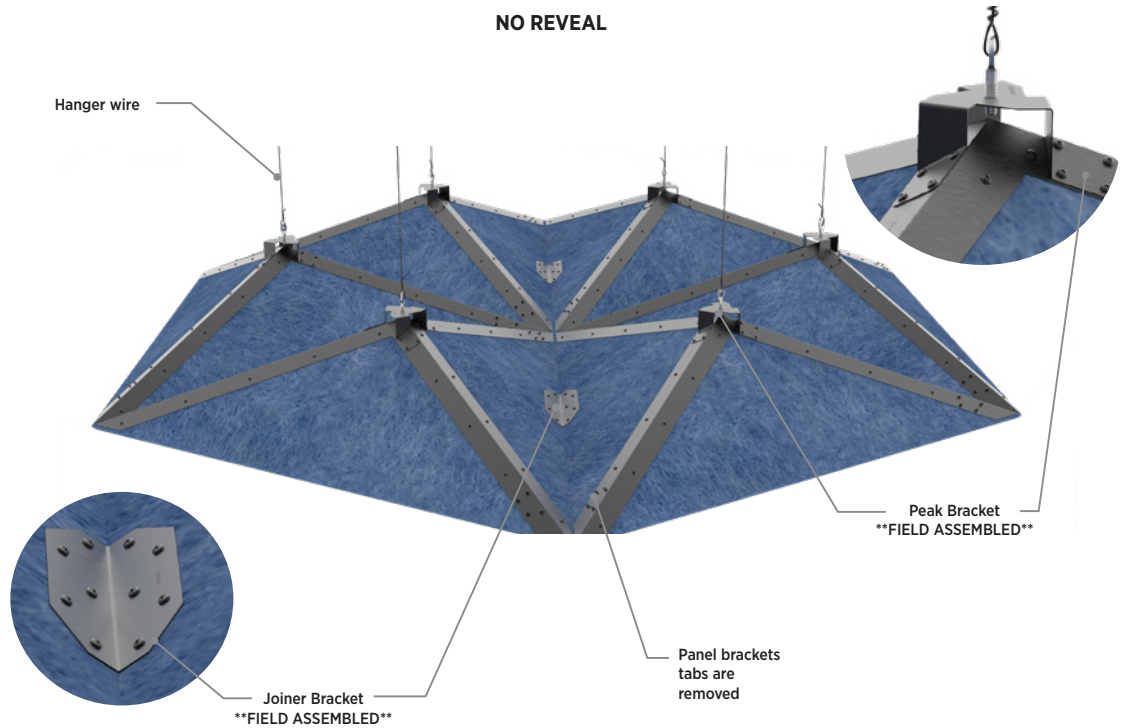


USG Ceilings Plus® Design Solutions -
COLORTEX™ TRIMETRIX™
 ACOUSTIC PANEL SOLUTIONS

ORDER SAMPLES/LITERATURE
 Contact your local sales rep.
TECHNICAL SERVICES
 Contact your local sales rep.


FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
 Contact your local sales rep.

PANEL SIZES


Declare. Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.




CTPA5049
 Sides: 50"
 Height: 4.9"




CTPA5075
 Sides: 50"
 Height: 7.5"




CTPA50105
 Sides: 50"
 Height: 10.5"



CTPA3637
 Sides: 36"
 Height: 3.7"




CTPA3655
 Sides: 36"
 Height: 5.5"




CTPA3677
 Sides: 36"
 Height: 7.7"

Open Reveal panels come with the following hardware:



PANEL BRACKET TABS
 FIELD ASSEMBLED


No Reveal panels come with the following hardware:



PEAK BRACKET
 FIELD ASSEMBLED


COMPONENTS

OPEN REVEAL
 MOUNTING HARDWARE INCLUDED




HUB
 CTHA9000-6
 SHOWN


CTHA9000-1 CTHA9000-2 CTHA9000-3 CTHA9000-4 CTHA9000-5 CTHA9000-6



CTHA9000-7 CTHA9000-8 CTHA9000-9 CTHA9000-10 CTHA9000-11



NO REVEAL
 MOUNTING HARDWARE INCLUDED



JOINER BRACKET
 FIELD ASSEMBLED

USG Ceilings Plus® Design Solutions -
COLORTEX™ TRIMETRIX™
 ACOUSTIC PANEL SOLUTIONS


ORDER SAMPLES/LITERATURE
 Contact your local sales rep.
TECHNICAL SERVICES
 Contact your local sales rep.

**FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL**
 Contact your local sales rep.


Declare. Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

LAYOUT EXAMPLES

OPEN REVEAL

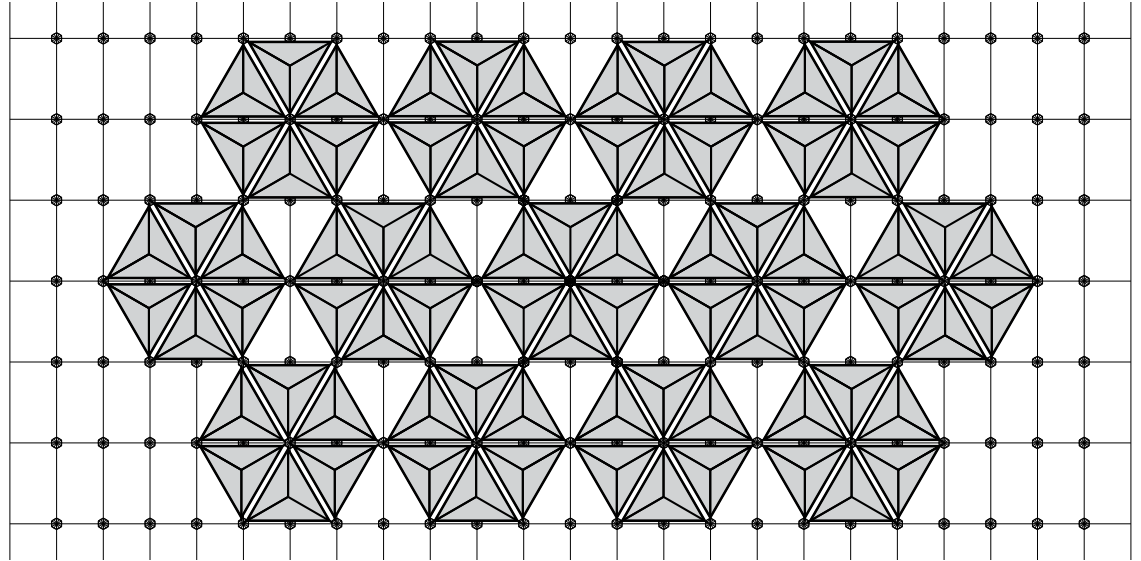

NO REVEAL

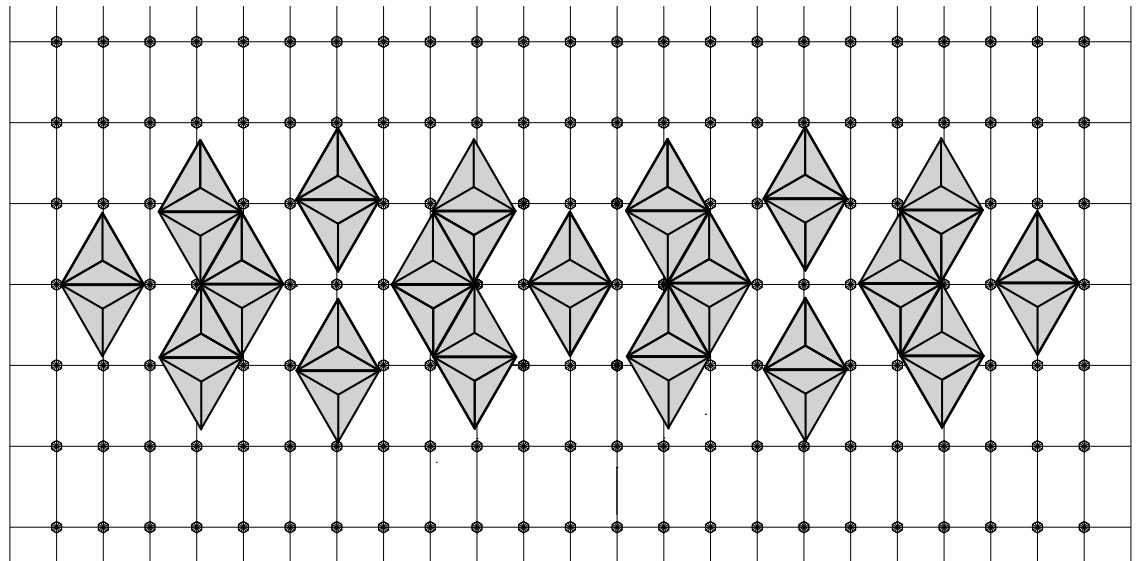

PHYSICAL DATA

Additional Documents and Resources
 Architectural Specification
 Installation and Handling Guide: IC307845
 Warranty: SC2102

Fire Classification
 Surface-burning characteristics
 ASTM E84: Class A
 CAN/ULC S102.2 results as follows:
 Flame Spread: 10
 Smoke Developed: 215

Installation
 Install per IBC, CISCA and USG installation instructions.

Acoustic Performance
 1. Array-NRC is calculated per ASTM C423 and varies with Trimetrix size and configuration.

Integration
 Colortex Trimetrix can accommodate a full range of Third-Party systems for any design intent. Air diffusers, speakers, sprinklers and other ceiling attached accessories can be independently attached to deck within our ceilings. CAD details are available online at www.ceilingplus.com.

Modification
 Panels are easily modified in the field with standard tools. See our full list of CAD details.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC307305/rev. 7-25
 © 2025 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, Ceilings Plus, CGC, Colortex, Trimetrix, the USG/CGC logo, The USG Ceilings Plus logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

