USG Ceiling Solutions

USG Ceilings Plus® Design Solutions - COLORTEX™ BLADES

ACOUSTIC LINEAR CEILING SYSTEM

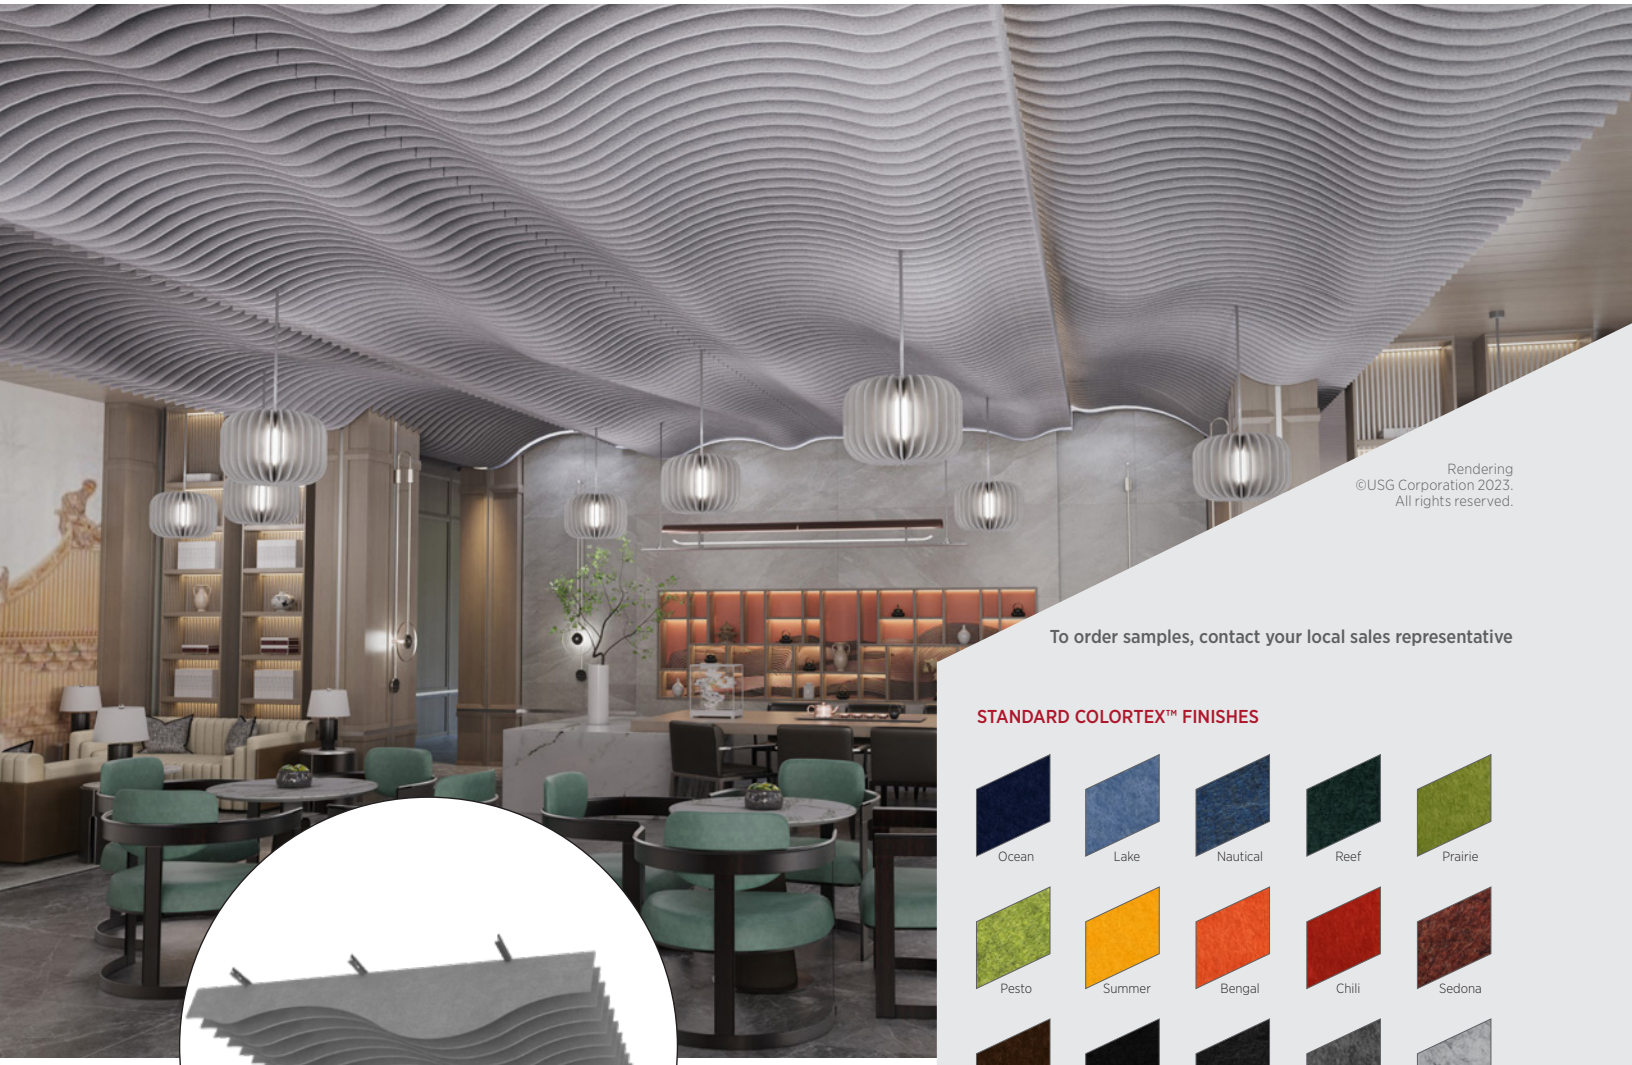

Rendering
©USG Corporation 2023.
All rights reserved.

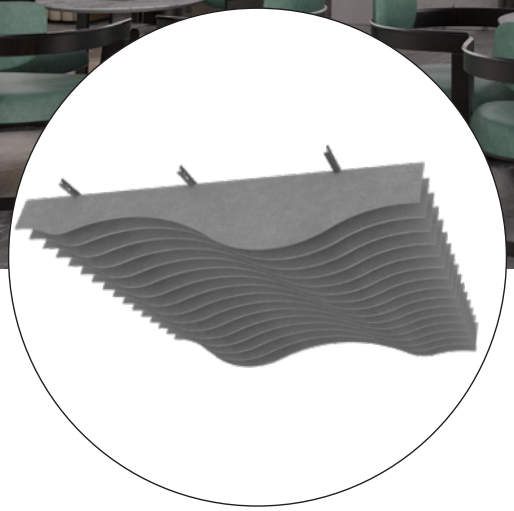

FEATURES AND BENEFITS

- Made from 100% recycled material.
- Fully accessible plenum at every panel location.
- Third party integration of diffusers, lights, speakers, sprinklers, wifi, etc. (independently suspended).
- Design flexibility with unlimited profiles and layout options.
- Available in 1/2" thick.
- Provides excellent acoustic performance with Array-NRC[1] up to 1.20.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds

To order samples, contact your local sales representative

STANDARD COLORTEX™ FINISHES

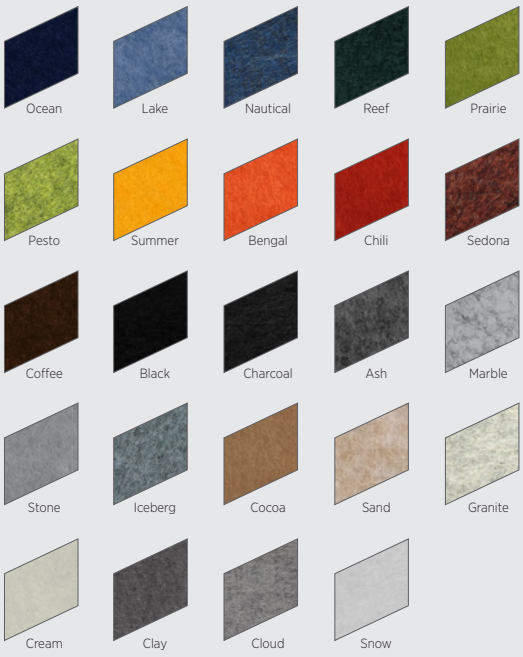

WOODGRAIN COLORTEX™ FINISHES



USG CEILINGSPLUS®

USG Ceilings Plus® Design Solutions - COLORTEX™ BLADES

ACOUSTIC LINEAR CEILING SYSTEM

ORDER SAMPLES/LITERATURE
Contact your local sales rep.

TECHNICAL SERVICES
Contact your local sales rep.

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
Contact your local sales rep.

Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

PERFORMANCE OPTIONS

Application	Grid Options	Finish	Accessibility	Ceiling Open %	Thickness	Array-NRC[1]	Fire Class	Recycled Content	Maintenance	Weight
Interior	Direct Mount to DX Tee Grid	24 Standard Colors & 3 Wood Grains	Full	Varies	1/2" Thick	Up to 1.20	Class A, ASTM E84 CAN/ULC S102.2	100% (hardware excluded)	See architectural specification	Varies

DESIGN CONFIGURATIONS

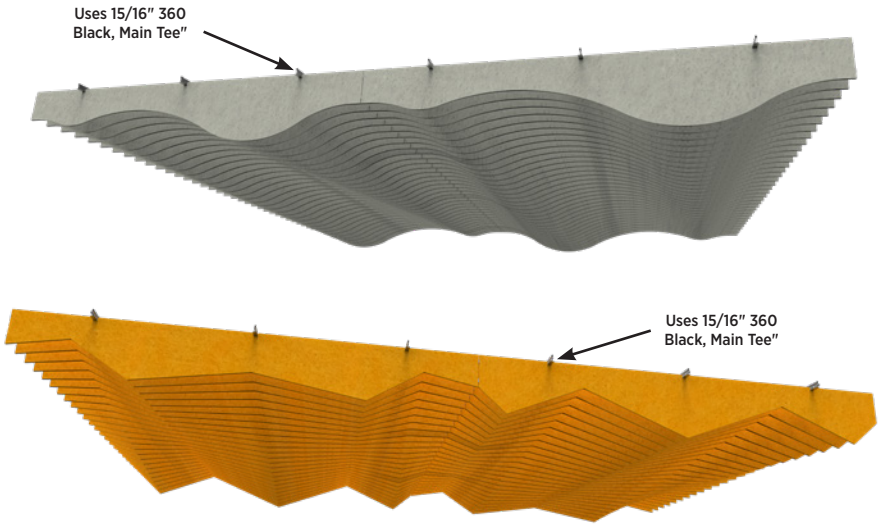

DYNAMIC DESIGN

The profile of each blade varies to create a visual dynamic design.

Dynamic modules consist of 16 blades.

Multiple dynamic modules of the same design can be used to cover more area.

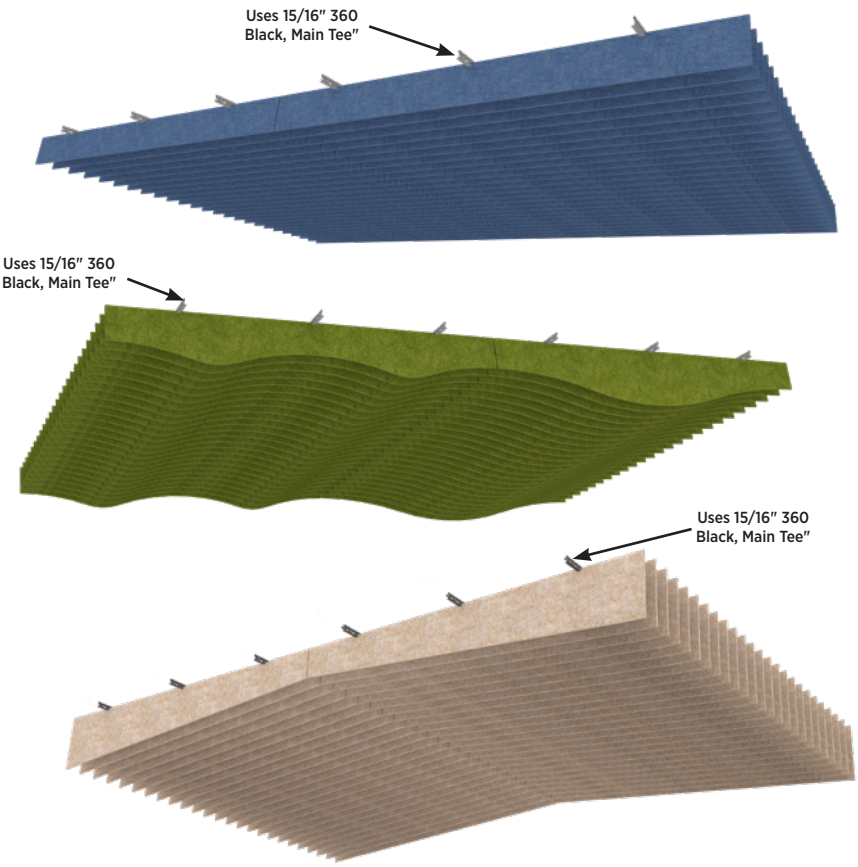

STATIC DESIGN

The profile of each blade is precisely the same.

Each blade is 96" (nominal) in length and the gap between each blade is flexible. Specify quantities for your project needs.

Static blades designs can be used interchangeably because the minimum heights are to create unique designs.

USG CGC

USG Ceilings Plus® Design Solutions - COLORTEX™ BLADES

ACOUSTIC LINEAR CEILING SYSTEM

ORDER SAMPLES/LITERATURE
Contact your local sales rep.

TECHNICAL SERVICES
Contact your local sales rep.

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
Contact your local sales rep.

Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

DESIGN DETAILS

STRAIGHT

CBPA1100S96

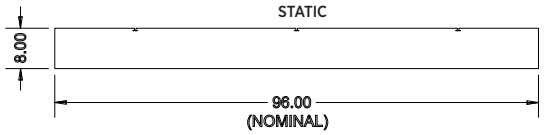

DROP

CBPA1200S96-A

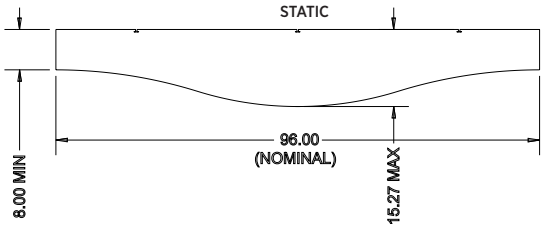

RIPPLE

CBPA1200S96-B

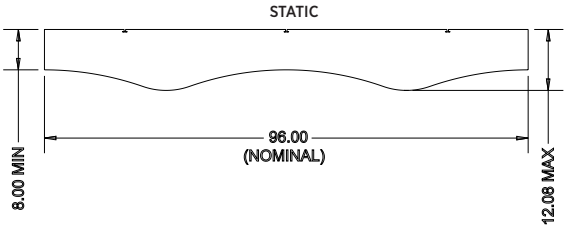

SLANT

CBPA1300S96

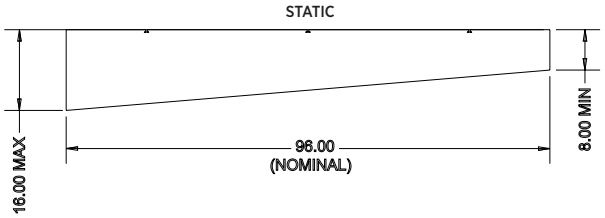

WAVES

CBPA2100D96

Sold in modules of 16

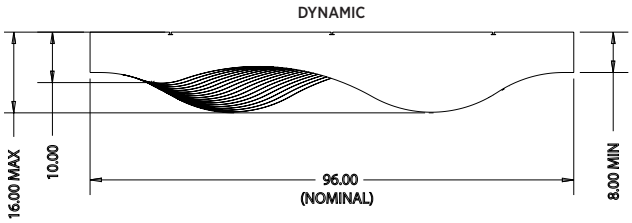

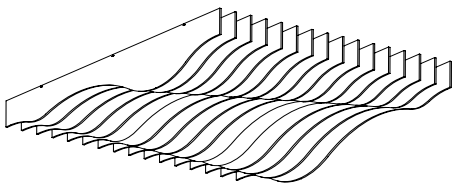

PEAKS

CBPA2200D96

Sold in modules of 16

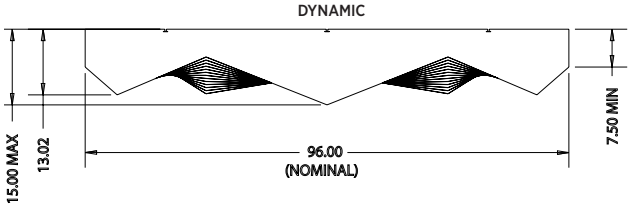

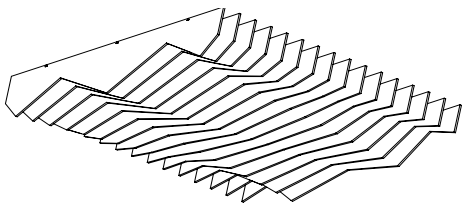

USG Ceilings Plus® Design Solutions - COLORTEX™ BLADES

ACOUSTIC LINEAR CEILING SYSTEM

ORDER SAMPLES/LITERATURE
Contact your local sales rep.

TECHNICAL SERVICES
Contact your local sales rep.

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
Contact your local sales rep.

Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

ATTACHMENT DETAILS

ALL BLADES ARE DESIGNED TO SLIDE ONTO 15/16" MAIN TEE

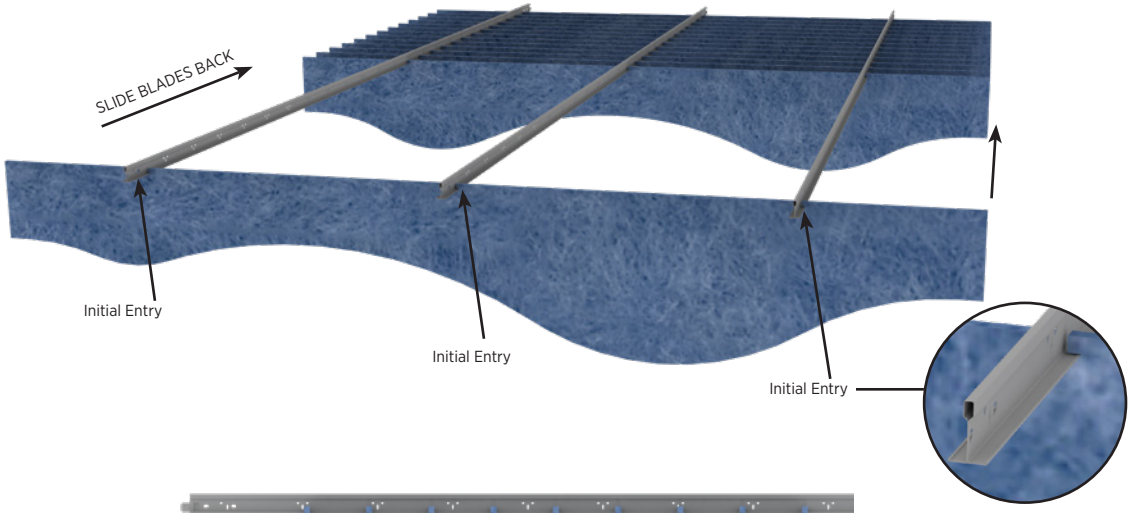

BLADES CAN SLIDE FOR LIMITLESS ADJUSTMENT

Close-Up Blade Spacing View

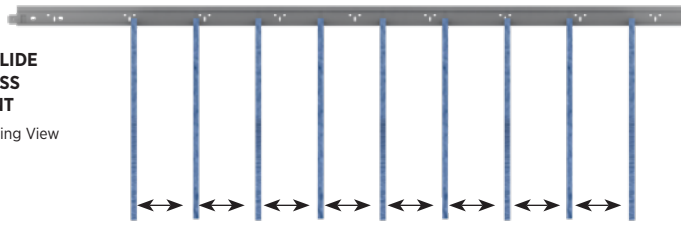

BLADES CAN SLIDE FOR EASY AND QUICK ACCESSIBILITY

Overall End-To End View



SYSTEM DETAILS

BLADES ATTACH TO 15/16" MAIN TEE, UNSLOTTED, AT 32" INTERVALS

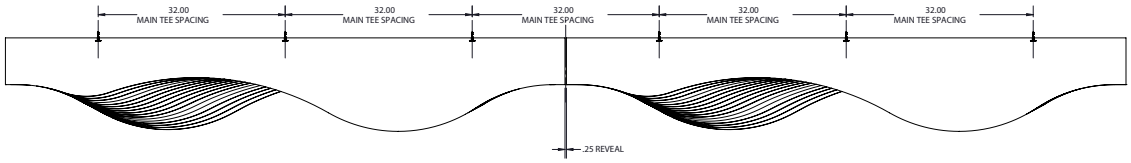

PHYSICAL DATA

Additional Documents and Resources
Architectural Specification
Installation Manual: IC328647
Handling Guide: IC328647
Warranty: SC2102

Fire Classification
Surface-burning characteristics
ASTM E84: Class A
CAN/ULC S102.2 results as follows:
Flame Spread: 10
Smoke Developed: 215

Suspension System
Supporting main tees are classified as Heavy Duty as classified per ASTM C635 when tested in accordance with ASTM E3090 and AC368.

Seismic Compliance
Suspension System is included in ICC ES ESR 1222 for use in Seismic Design Categories A through F when installed according to ASTM C636 and ASTM E580. Alternate installation methods may be used when designed by a registered engineer and approved by the authority having jurisdiction. Test reports for suspension system performance may be available upon request.

Acoustic Performance
1. Array-NRC is calculated per ASTM C423 and varies with Colortex™ Blades profile size and spacing. Colortex™ Blades spaced closely together can achieve higher Array-NRC.

Integration
Colortex Blades can accommodate a full range of Third-Party systems for any design intent. Air diffusers, speakers, sprinklers and other ceiling attached accessories can be independently attached to deck within our ceilings. CAD details are available online at www.ceilingsplus.com.

Modification
Panels are easily modified in the field with standard tools. See our full list of CAD details.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC328635/rev. 7-25
© 2025 USG Corporation and/or its affiliates. All rights reserved.
Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CEILINGS PLUS, CGC, Colortex, the USG/CGC logo, the USG Ceilings Plus logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.