

## Inlet II


Collection	<b>Unite II</b>	
Style Number	<b>4372V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile With Fiberglass</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard+®</b>	
	U.S.	Metric
Nominal Dimensions	<b>9 in w x 48 in l</b>	<b>23 cm w x 122 cm l</b>
Actual Dimensions	<b>9.00 in w x 48.00 in l</b>	<b>22.86 cm w x 121.92 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.197 in</b>	<b>5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Loose Lay</b>	
Installation	<b>Direct Glue Or Perimeter Glue</b>	
Recommended Adhesive	<b>2200 1 Gallon, 2200 4 Gallon, 4151, 4200 1 Gallon, 4200 4 Gallon, 4252 (No Heavy Rolling or Static Loads) or S150-95</b>	



### Packaging

Pieces per Carton	<b>8 pcs</b>	
Area per Carton	<b>24 ft<sup>2</sup></b>	<b>2.23 m<sup>2</sup></b>
Weight per Carton	<b>40.12 lbs</b>	<b>18.2 kg</b>
Area per Pallet	<b>1056 ft<sup>2</sup></b>	<b>98.11 m<sup>2</sup></b>
Boxes per Pallet	<b>44 boxes</b>	

### Recommended Installation Method

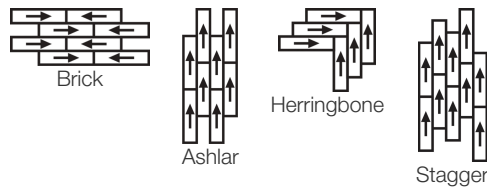

### Coordinating Products

LVT: Union, Commingle, Solo 5.0

### Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *1500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

---

[15 Year Commercial Limited Warranty](#)

[Commercial Limited Underbed Bond Warranty](#)

## Diversity & Inclusion

---

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health & Environmental Certifications

---

### Health & Wellbeing

Material & Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certified

### Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
11.59 Kg Co<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

### Global Product Assessment

GSA | Approved  
Country of Origin | Imported

## Works With WELL | WELL V2 Contribution Credit

---

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition  
  
X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization  
  
X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization  
  
X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization  
  
X11 Long Term Emissions Control  
Part 2: Flooring Optimization  
  
X14 Material Transparency  
Part 1: Promote Ingredient Disclosure Optimization

**Absence of Asbestos**

**Absence of Heavy Metals**

**Absence of Halogenated Flame Retardants**

**Ortho-Phthalates**

**FloorScore Certified**

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

